



# Controller Programmable Sensor Interface

## Preliminary Data Sheet

### Description

The Controller Programmable Sensor Interface (MSCPSI) is a hybrid package containing two CMOS integrated circuits for processing signals from either a sensor or MEMS device. Small analog signals are amplified, anti-aliased, and filtered before being converted into a digital signal output by the MSCPSI. These processing functions are controlled by an internal PIC<sup>TM</sup> processor through the MSCPSI's on-chip serial interface. The MSCPSI also includes offset adjust, low power modes and an on-chip temperature sensor.

The input is fed into a low noise amplifier followed by two 6th order Elliptic switched capacitor anti-aliasing filters. The gain of the filter is controllable via the serial interface up to 18 dB (6 dB steps). The next stage is a 6 pole Butterworth switched capacitor highpass filter, also with up to 18 dB of controllable gain. Following this is a 7th order Elliptic switched capacitor lowpass filter. These internal filters can be bypassed via the serial interface. The 12 bit, 160 ksps A-to-D converter provides a digital output.

The MSCPSI operates with a supply voltage from 3.3 VDC up to 5.5 VDC. It is available in a 64 pin LQFP Package with an industrial temperature range.

There are 4 current levels that are selectable for the filter and 12-bit Analog-to-Digital Converter. Lower corner or sample frequency settings can be set for lower current operation. When the maximum corner or sample frequency is needed, the currents can be set greater.

### Features

- Low Power Modes
- Low Noise Input:  $<30 \text{ nV}/(\text{Hz})^{1/2}$  at 100 Hz
- Anti Alias Filter with Adjustable Gain
- Lowpass Filter with Adjustable Gain Stage
- Programmable SC Highpass Filter with Gain Adjust
- Programmable SC Lowpass Filter with Gain Adjust
- Temperature Sensor
- Offset Adjust
- 12 bit 160 ksps A-to-D Converter 4 input Mux
- 14-bit PIC<sup>TM</sup> Processor with 2k FLASH memory
- 10-bit 10 ksps A-to-D Converter w/ 5 input Mux

### Applications

- Low Noise Sensors
- MEMS Interface
- Accelerometer Sensing
- Pressure Sensing
- Vibration Sensing
- Temperature Sensing
- Test Equipment Cards/Data Acquisition Cards

### Absolute Maximum Ratings

Power Supply Voltage	+6V
Storage Temperature Range	-60 to +150°C
Operating Temperature Range	-45 to +85°C

MSCPSI



# Controller Programmable Sensor Interface

## Preliminary Data Sheet

### Electrical Characteristics\_\_\_\_\_


(VDD = +5.0V, T = 25° C)

MSCPSI

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>DC Specifications</b>						
Operating Voltage	VDD		3.3	5.0	5.5	V
Supply Current Regular	IDD	Power Control Bits 1111		6		mA
Supply Current Medium	IDD	Power Control Bits 1010		5		mA
Supply Current Low	IDD	Power Control Bits 0101		3		mA
Input Offset Voltage	IOV			5		mv
Input Bias Current	IBI			50		pA
Switch Input On Resistance	R <sub>IN</sub>			20		kΩ
Temperature Voltage		T= 25°C		2.5		V
Temperature Voltage Slope				+7.5		mV/°C
I/O Interface Voltage	VIO			3	VDD	V
Reference Voltage	VREF			VDD/2		V
<b>AC Specifications</b>						
Amp Unity Gain Bandwidth				2		MHz
Output Voltage Range				4		V <sub>pp</sub>
Output Sink Capability				2		mA
Output Source Capability				0.2		mA
Input Impedance				10		MΩ
Input Referenced Noise Amp	e <sub>n</sub>	fo=100 Hz		30		nv/(Hz) <sup>1/2</sup>
Total Harmonic Distortion	THD	fo=1 kHz A weighted		-60		dB
Maximum Clock Frequency				20		MHz

Mixed Signal Integration Corporation reserves the right to change any product or specification without notice at any time. Mixed Signal Integration products are not designed or authorized for use in life support systems. Mixed Signal Integration assumes no responsibility for errors in this document.

# Controller Programmable Sensor Interface Preliminary Data Sheet

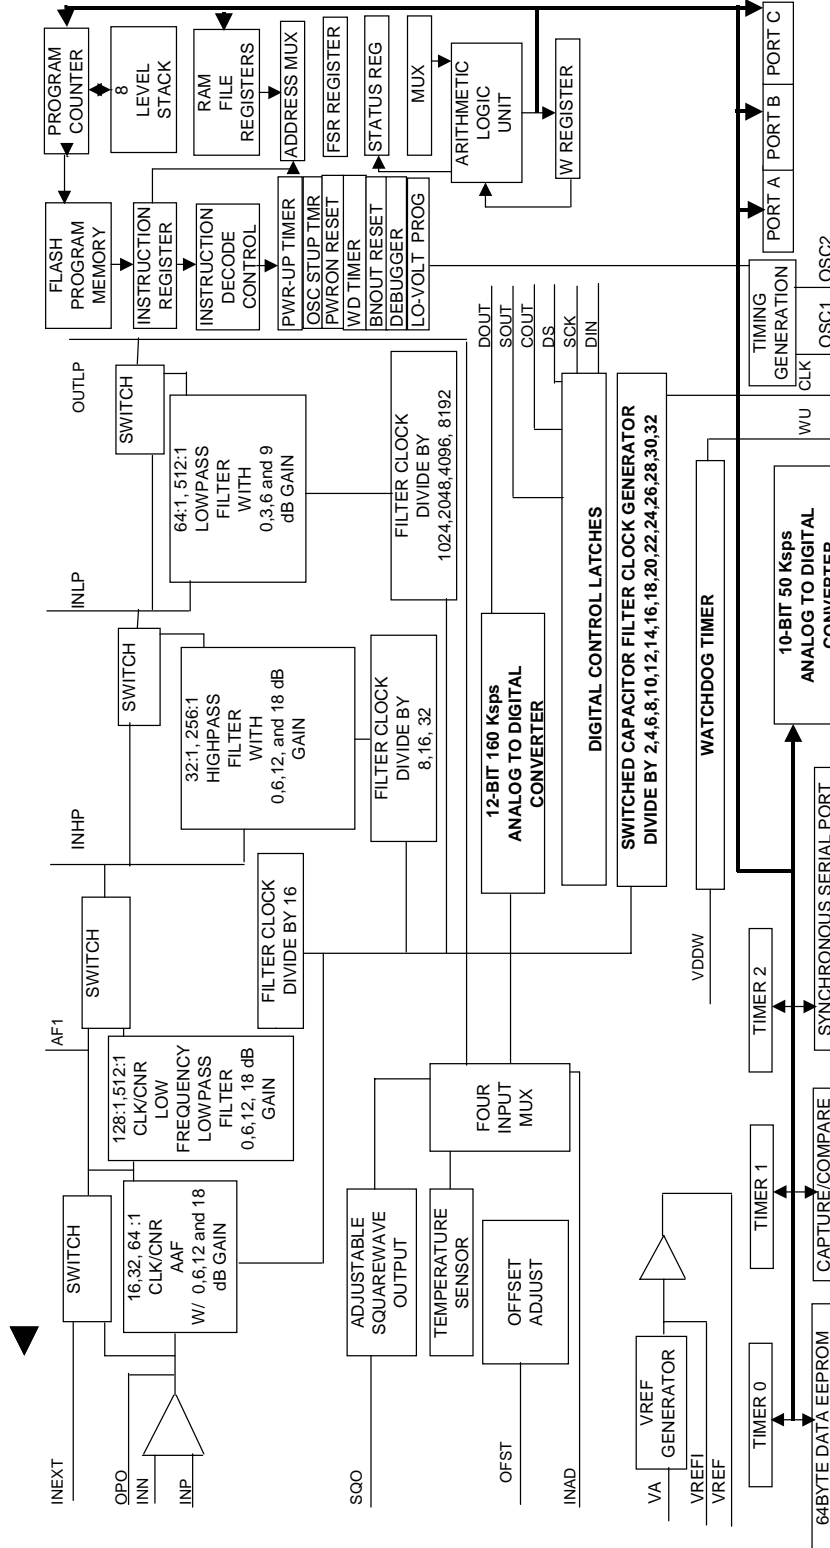

MSCPSI



# Controller Programmable Sensor Interface

## Preliminary Data Sheet

MSCPSI

Pin Number	Pin Name	Description	Pin Number	Pin Name	Description
1	BIAS	Bias Input	30	VA	Positive Supply; Typically 5.0 VDC
2	OFST	Offset Adjust Output			
3	OPO	Op Amp Output	31	INAD	Input to A/D
4	N/C	Do Not Connect	32	OUTLP	Lowpass Filter Output
5	N/C	Do Not Connect	33	INLP	Lowpass Filter Input)
6	INN	Low Noise Op Amp Negative Input	34	RB4	Port B4
			35	RB5	Port B5
7	N/C	Do Not Connect	36	RB6	Port B6
8	INP	Low Noise Amp Positive Input	37	RB7	Port B7
			38	MCLRN	FLASH VPP/RESET
9	SQO	Square Wave Output	39	RA0	Port A0
10	VREFI	Voltage Reference Input	40	RA1	Port A1
11	VREF	Voltage Reference Nominally 2.5 VDC	41	RB2	Port A2
			42	RA3	Port A3
12	TEMP	Temperature Sensor Out	43	RA4	Port A4
13	AGND	Analog Ground Typically tied to 0 VDC	44	RA5	Port A5
			45	VSSD	DIGITAL GROUND (0 V)
14	DGND	Digital Ground Typically tied to 0 VDC	46	OSC1	CRYSTAL INPUT
			47	OSC2	CRYSTAL OUTPUT
15	TEST	Test pin Do not Connect	48	RC0	Port C0
16	CLK	Master Clock	49	RC1	Port C1
17	DS	Data Strobe Input	50	RC2	Port C2
18	SCK	Serial Data Clock	51	RC3	Port C3
19	DIN	Serial Data Input	52	RC4	Port C4
20	VIO	I/O VOLTAGE: typically 5.0 VDC	53	RC5	Port RC5
			54	RC6	Port C6
21	VDDW	Watchdog Timer VDD typically 3.3 VDC	55	RC7	Port C7
			56	DGND1	DIGITAL GROUND 1 (0 V)
22	VDD	DIGITAL POSITIVE SUP- PLY: Typically 5.0 VDC	57	VDDD	MICROPROCESSOR SUPPLY typically tied to 5.0 VDC
23	DOUT	Data Output	58	RB0	Port B0
24	N/C	Do Not Connect	59	RB1	Port B1
25	N/C	Do Not Connect	60	RB2	Port B2
26	SOUT	Strobe Out Denotes start of conversion	61	RB3	Port B3
			62	INHP	Highpass Filter Input
27	COUT	Calibrator Output	63	N/C	Do Not Connect
28	WU	Watchdog output	64	INEXT	External Input
29	AF1	Alias Filter 1 Output Drives >100kohms <12 pF			



# Controller Programmable Sensor Interface Preliminary Data Sheet

## Serial Control Register

The MSCPSI uses serial data control with address and data clocked in with 21 cycles of the CLK clock. The data strobe (DS) resets the internal address data shift register. The address is a 4 bit nibble followed by a 16 bit word.

Address	Description
0010	Amp and Antialias filter1 and 2 control
0011	Highpass Filter Control Register
0100	Lowpass Filter Control Register
0101	A/D converter and Watchdog timer Control Register
0110	Watchdog Timer Count Register

Address	Description
0000	Calibration Control Register; Controls signal on pin 18
0001	Offset DAC control level Controls volt age at pin 29; AAF and OpAmp current control

MSCPSI

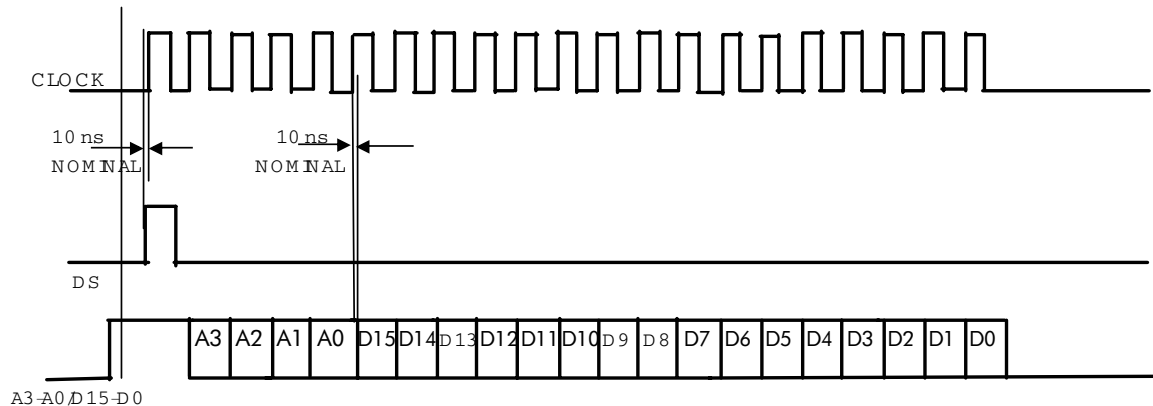


FIGURE 2: TIMING DIAGRAM OF ADDRESS/DATA INPUT

# Controller Programmable Sensor Interface Preliminary Data Sheet

MSCPSI

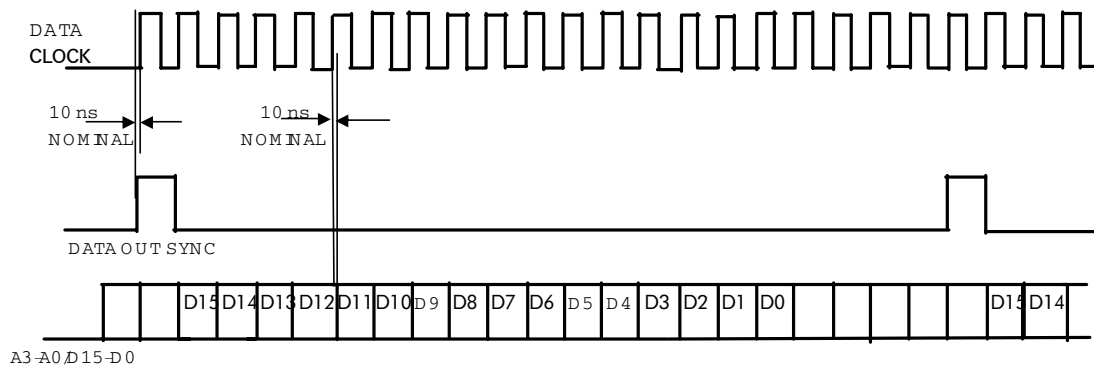


FIGURE 3: TIMING DIAGRAM OF DATA OUTPUT

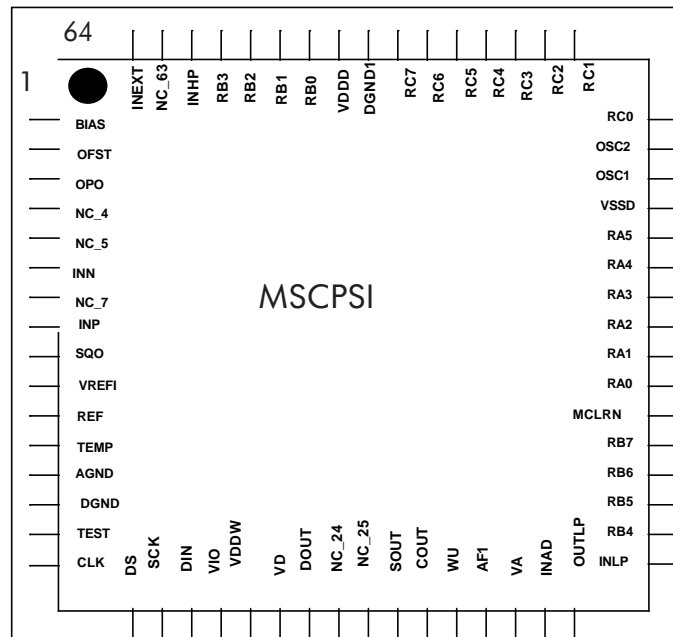


FIGURE 4: PINOUT OF MSCPSI (TOP VIEW)



# Controller Programmable Sensor Interface Preliminary Data Sheet

## Serial Interface Registers

ADDRESS NIBBLE		DATA WORD										DESCRIPTION									
A3	A2	A1	A0	D15	D14	D13	D12	D11	D10	D9	D8		D7	D6	D5	D4	D3	D2	D1	D0	
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Power on
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Default
0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	10kHz
0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	1	40mvpp
0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	0	1	5kHz
0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	1	0	160mvpp
0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	1	0	3.3kHz
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	1	1	270mvpp
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	1	1	2.5kHz
0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	0	0	400mvpp
0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	0	0	2kHz
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	0	0	400mvpp
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	0	0	1.15kHz
0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	0	0	400mvpp
0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	0	0	590Hz
0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	0	0	400mvpp
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	0	0	307Hz
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	0	0	400mvpp
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	0	0	152Hz
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	0	0	400mvpp
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	0	0	78Hz
0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0	0	0	0	400mvpp
0	0	0	0	0	0	0	0	0	1	1	1	1	0	0	0	0	0	0	0	0	39Hz
0	0	0	0	0	0	0	0	0	1	1	1	1	0	0	0	0	0	0	0	0	400mvpp
0	0	0	0	0	0	0	0	0	1	1	1	1	0	0	0	0	0	0	0	0	CAL OFF
0	0	0	0	0	0	0	0	0	1	0	1	1	0	0	0	0	0	0	0	0	CAL PD

MSCPSI



# Controller Programmable Sensor Interface Preliminary Data Sheet

## MSCPSI

### Serial Interface Registers (continued)

ADDRESS		DATA WORD											DESCRIPTION								
A3	A2	A1	A0	D15	D14	D13	D12	D11	D10	D9	D8	D7		D6	D5	D4	D3	D2	D1	D0	
0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Power on Default
0	0	0	1	0	0	0	0	1	0	0	1	0	0	0	0	0	0	0	0	1	Low AAF current
0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Low Amp current
0	0	0	1	0	0	0	1	0	1	0	0	0	0	0	0	1	1	1	1	1	-4 mV DAC
0	0	0	1	0	0	0	1	0	1	0	0	0	0	0	0	1	1	1	1	1	Nor. AAF current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	0	1	1	1	1	1	1	Nor. Amp current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	0	1	1	1	1	1	1	-252mV DAC
0	0	0	1	0	0	0	1	1	1	1	0	0	1	0	1	1	1	1	1	1	Max. AAF current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	0	0	0	0	0	0	0	Max. Amp current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	0	0	0	0	0	0	0	-2.52mV DAC
0	0	0	1	0	0	0	1	1	1	1	0	0	1	0	0	1	1	1	1	1	Maxr. AAF current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	1	1	1	1	1	1	1	Max. Amp current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	1	1	1	1	1	1	1	4mV DAC
0	0	0	1	0	0	0	1	1	1	1	0	0	1	1	1	1	1	1	1	1	Max. AAF current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	1	1	1	1	1	1	1	Max. Amp current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	1	1	1	1	1	1	1	252mV DAC
0	0	0	1	0	0	0	1	1	1	1	0	0	1	1	1	1	1	1	1	1	Max. AAF current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	1	1	1	1	1	1	1	Max. Amp current
0	0	0	1	0	0	0	1	1	1	1	0	0	1	1	1	1	1	1	1	1	2.52mV DAC





# Controller Programmable Sensor Interface Preliminary Data Sheet

## Serial Interface Registers (continued)

ADDRESS NIBBLE		DATA WORD																DESCRIPTION		
A3	A2	A1	A0	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2		D1	D0
0	0	1	0	0	AAF2	Gain	AAF1	Gain	AAF1	AAF2	AAF2	AAF1	1	0	1	1	1	1	1	Power on
0	0	1	0	0	0	0	0	1	0	1	0	0	1	1	1	0	1	1	1	Default
0	0	1	0	0	0	1	0	1	0	0	1	1	1	1	0	1	1	1	1	6dB AAF2
0	0	1	0	0	0	1	0	1	0	0	1	1	1	1	0	1	1	1	1	6dB AAF1
																				Amp to AAF
																				AAF2 to HP
																				44 Hz AAF2
																				12kHz AAF1
																				12dB AAF2
																				12dB AAF1
																				Amp to AAF
																				AAF2 to HP
																				156Hz AAF2
																				8.5kHz AAF1
																				18dB AAF2
																				18dB AAF1
																				Amp to AAF
																				AAF2 to HP
																				156Hz AAF2
																				2.6kHz AAF1
																				18dB AAF2
																				18dB AAF1
																				EXT to AAF
																				AAF1 to HP
																				156Hz AAF2
																				2.6kHz AAF1
																				0dB AAF2
																				0dB AAF1
																				EXT to AAF
																				HPIN to HP
																				156Hz AAF2
																				2.6kHz AAF1

MSCPSI



# Controller Programmable Sensor Interface Preliminary Data Sheet

## MSCPSI

**Serial Interface Registers (continued)**

ADDRESS NIBBLE	DATA WORD																DESCRIPTION				
	A3	A2	A1	A0	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4		D3	D2	D1	D0
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	Power on Default
0001	1	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	1	6dB HP
0001	1	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	1	HP to LP
0001	1	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	0	1	0	0	1.5Hz HP
0001	1	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	0	1	0	0	12dB HP
0001	1	0	0	0	0	0	0	0	0	0	1	0	1	0	1	0	1	0	1	0	HP TO LP
0001	1	0	0	0	0	0	0	0	0	0	1	1	0	1	0	1	1	0	1	0	10kHz HP
0001	1	0	0	0	0	0	0	0	0	0	1	1	0	1	0	1	0	1	0	0	18dB HP
0001	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	AAF to LP
0001	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	1.25kHz HP
0001	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	12dB HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	EXT to LP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1 Hz HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	1	0dB HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	HP to LP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	78 Hz HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	12dB HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	HP TO LP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	10 Hz HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	18dB HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	AAF to LP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	20 Hz HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	12dB HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	EXT to LP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	621 Hz HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0dB HP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	HP to LP
0001	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	155 Hz HP

# Controller Programmable Sensor Interface

## Preliminary Data Sheet

**Serial Interface Registers (continued)**

ADDRESS NIBBLE		DATA WORD																DESCRIPTION			
A3	A2	A1	A0	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2		D1	D0	
0	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	1	Power on Default
0	1	0	0	0	0	0	0	1	1	0	0	0	1	0	1	0	0	0	0	1	9dB LP
0	1	0	0	0	0	0	0	1	1	0	0	0	1	1	1	0	1	0	1	1	LOW A/D I MED LP CUR
0	1	0	0	0	0	0	0	1	1	0	1	1	1	0	1	1	0	0	0	0	HP OUT
0	1	0	0	0	0	0	0	1	0	1	1	1	1	0	1	1	0	0	0	0	1.3kHz LP
0	1	0	0	0	0	0	0	1	0	1	1	1	1	0	1	1	0	0	0	0	6dB LP
0	1	0	0	0	0	0	0	1	0	1	1	1	1	0	1	1	0	0	0	0	MAX A/D I
0	1	0	0	0	0	0	0	1	0	1	1	1	1	0	1	1	0	0	0	0	MAX LP CUR
0	1	0	0	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	LP OUT
0	1	0	0	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	2.6kHz LP
0	1	0	0	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	OdB LP
0	1	0	0	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	MED A/D I
0	1	0	0	0	0	0	0	0	0	0	0	1	1	0	1	1	0	0	0	0	MED LP CUR
0	1	0	0	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	HP OUT
0	1	0	0	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	813Hz LP
0	1	0	0	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	3dB LP
0	0	0	0	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	MLO A/D I
0	0	0	1	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	MED LP CUR
0	0	0	1	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	HP OUT
0	0	0	1	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	2.4Hz LP
0	0	0	1	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	3dB LP
0	0	0	1	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	LOW A/D I
0	0	0	1	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	MED LP CUR
0	0	0	1	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	HP OUT
0	0	0	1	0	0	0	0	0	0	1	0	1	1	0	1	1	0	0	0	0	10Hz LP

MSCPSI

# Controller Programmable Sensor Interface

## Preliminary Data Sheet

### MSCPSI

#### Serial Interface Registers (continued)

ADDRESS NIBBLE		DATA WORD										DESCRIPTION								
A3	A2	A1	A0	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	DESCRIPTION
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	1	0	0	Power on Default
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	1	0	0	WUT ENABLE
0	1	0	1	0	0	0	0	0	0	0	0	0	1	1	0	0	1	0	0	NO RESET
0	1	0	1	0	0	0	0	0	0	0	0	0	1	1	0	0	1	0	0	NO SLEEP
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	10 MHz CLK
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	160kHz A/D
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	A/D INPUT
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	WUT ENABLE
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	1	1	0	NO RESET
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	1	1	0	NO SLEEP
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1	20 MHz CLK
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	160kHz A/D
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	TEMP INPUT
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	WUT ENABLE
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	NO RESET
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	NO SLEEP
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	20 MHz CLK
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	40kHz A/D
0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	CAL INPUT
0	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Default
0	1	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	WAKEUP TIMER COUNT [D15-D0]



# Controller Programmable Sensor Interface Preliminary Data Sheet

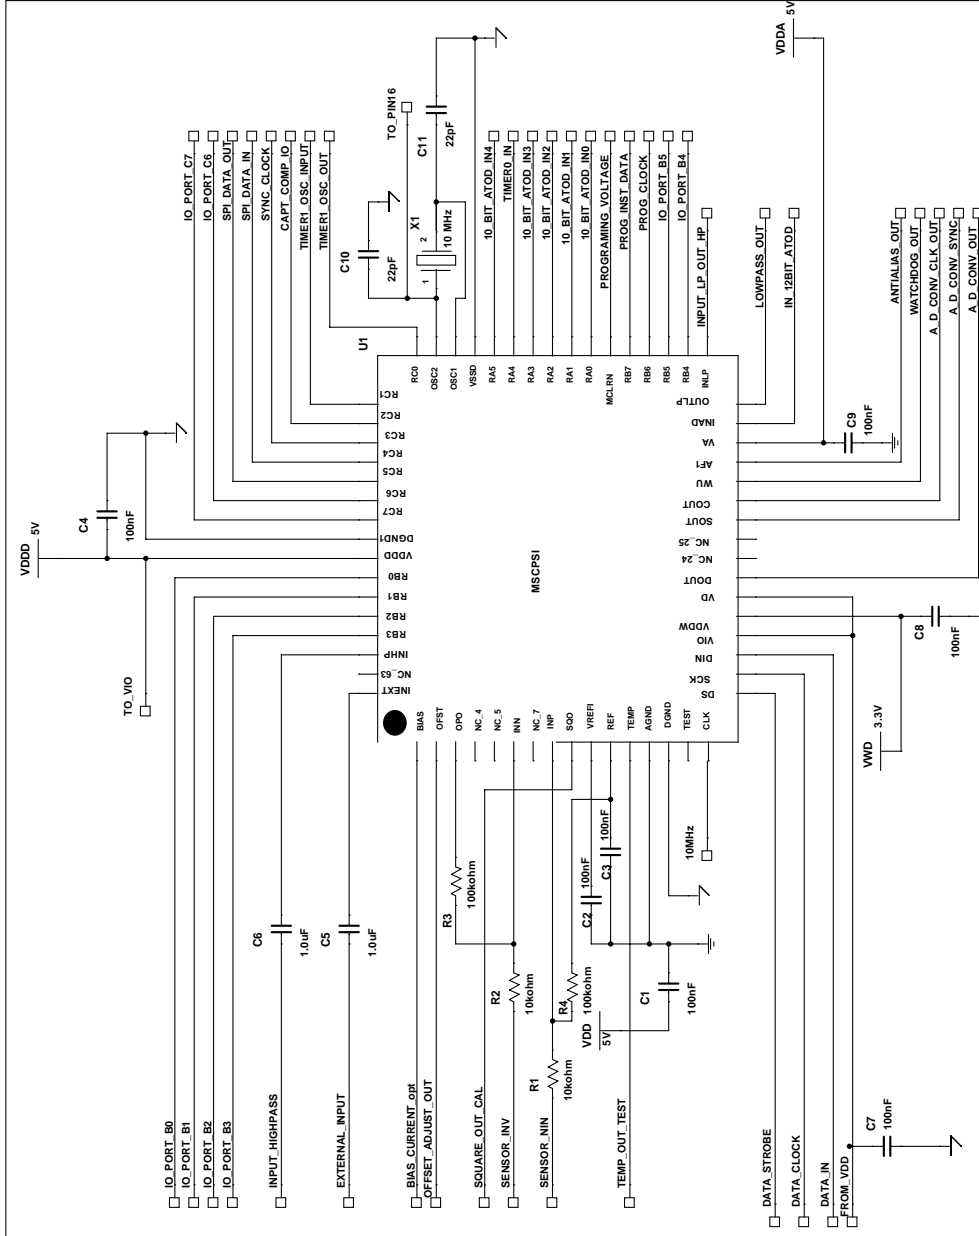


FIGURE 5: TYPICAL SCHEMATIC

MSCPSI



# Controller Programmable Sensor Interface

## Preliminary Data Sheet

### Watchdog Timers Operation

The MSCPSI watchdog timer times to 18 hours from 2.3 seconds in 1 second increments. The watchdog timer is activated with bit 12 of Address Nibble 0110 (0x06). The timer is first deactivated ( bit 12 is set) then activated (bit 12 is reset) to start the timer. The MSCPSI watchdog timer provides an independent pulse to indicate if a processing problem has occurred with the system.

The watchdog timer in the controller portion of the MSCPSI is independent and is accessed using firmware code and utilizing the clrwtd command.

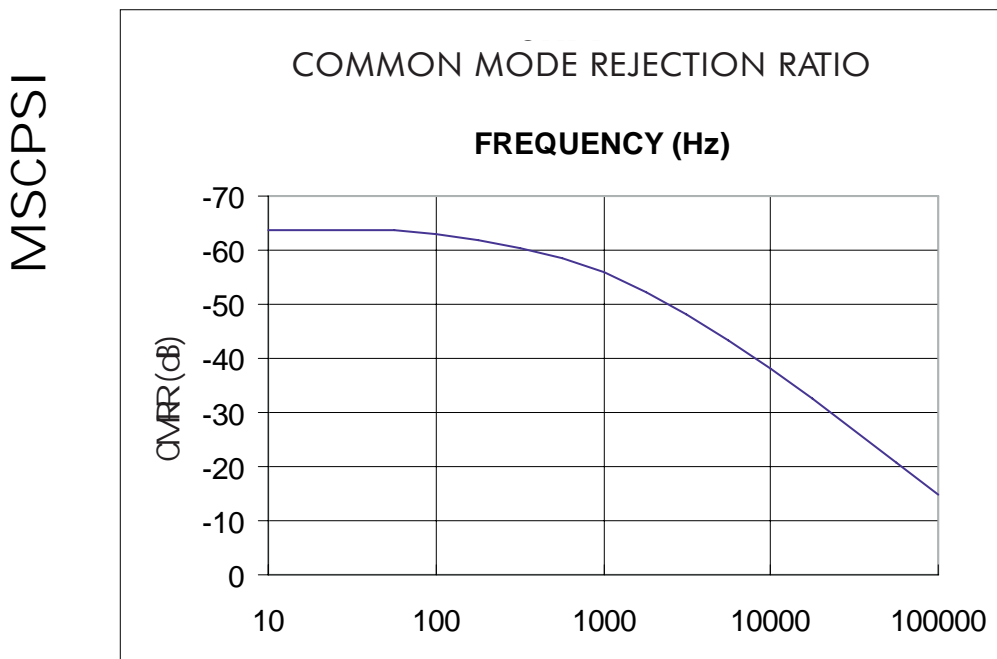


FIGURE 6: INPUT AMPLIFIER COMMON MODE REJECTION RATIO

# Controller Programmable Sensor Interface

## Preliminary Data Sheet

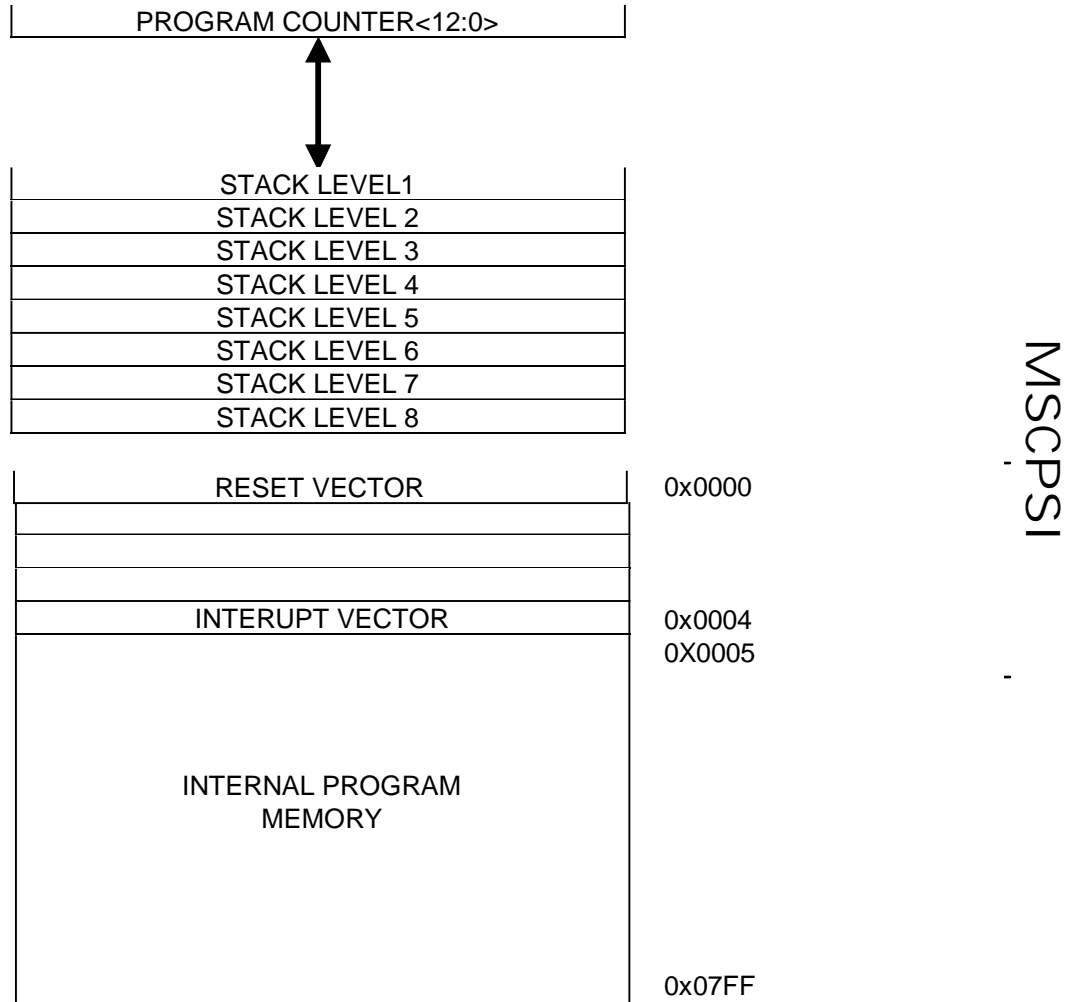


FIGURE 7: MEMORY MAP

# Controller Programmable Sensor Interface

## Preliminary Data Sheet

---

### Controller Commands

There are 35 instructions in the command set of the MSCPSI. There are in 4 groups: Arithmetic Instructions, Execution Instructions, Microcontroller Control Instructions and Bit Manipulation Instructions.

MSCPSI

### Arithmetic Instructions

movf	Move f
clrf	Clear f
clrw	Clear W
movwf	Move W to f
addwf	Add W to f
subwf	Subtract W from f
andwf	And W with f
iorwf	Inclusive Or W with f
xorwf	Exclusive Or W with f
comf	Complement f
swapf	Swap nibbles in f
rlf	Rotate left f through Carry
rff	Rotate right f through Carry
incf	Increment f
decf	Decrement f
incfsz	Increment f; skip if zero
decfsz	Decrement f; skip if zero
movlw	Move Literal to W
addlw	Add Literal to W
sublw	Subtract W from Literal
andlw	And Literal with W
iorlw	Inclusive Or Literal with W
xorlw	Exclusive Or Literal with W

### Execution Change Instructions

call 0x00	Call Subroutine
Return	Return from Subroutine
goto 0x00	Go To address
retfe	Return from Interrupt
retlw	Return with Literal in W

### Microcontroller Instructions

clrwtd	Clear Watchdog timer 2
sleep	Place Controller in Standby
nop	No Operation

### Bit Manipulation Instructions

bcf	Bit Clear f
bsf	Bit Set f
btfs	Bit Test f, skip if clear
btfs	Bit Test f, skip if set

For additional information on using these commands, consult the PICmicro™ Mid-Range MCU Family Reference Manual at [www.microchip.com](http://www.microchip.com). PICmicro™ is a trademark of Microchip Corporation.



## STANDARD PRODUCTS

MSRFIF	Radio Frequency Interface Front End
MSCPSI	Controller Programmable Sensor Interface
MSLOSC	15 Hz to 64 kHz All Silicon Sine Source
MSSPSI	Smart Programmable Sensor Interface
MSEPAF	Electrically Programmable Active Filter
MSCBT	Communications Baseband Transceiver
MSLV14	14 MHz Video Lowpass Filter
MSGEQ5A	Five Band Spectrum Analyzer
MSGEQ7	Seven Band Spectrum Analyzer
MSHFS1-6	Selectable High Frequency LP/BP Filter
MSFS1-6	Selectable Lowpass/Bandpass Filter
MSCAHF	Selectable High Frequency Active Lowpass/Bandpass Filter
MSU1F1-4, MSU2F1	Resistor Programmable Universal Active Filter
MSU1HF1-4, MSU2HF1	High Frequency Resistor Programmable Universal Active Filter
MSELP	Switched Capacitor Elliptic Lowpass Filter with Op Amps
MSNBLP	Switched Capacitor Butterworth Lowpass Filter
MSLE/B/C5L/M	Switched Capacitor General Purpose Lowpass Filter
MS2LFS	Dual Selectable Low Voltage Lowpass/Bandpass Filter
MSLFS	Selectable Low Voltage Lowpass/Bandpass Filter
MSHN1-6	Selectable High Pass/Notch Filter
MSRAAF	Resistor Programmable Active Audio Filter
MSRAHF	Resistor Programmable Active High Frequency Filter
MSDET	Tone Detector

Mixed Signal Integration  
2157F O'Toole Avenue  
San Jose, California 95131-1332  
Phone: (408)-434-6305  
Fax: (408)-434-6417

In Mississippi, Alabama, Georgia  
South Carolina, North Carolina, and  
Tennessee contact:

AdeptRep, Inc.  
280 Metaire Lane  
Madison, Alabama 35758  
Telephone: 256-772-1922  
Facsimile: 256-325-2841

In Arizona, Utah, Colorado, Montana,  
Wyoming, Idaho, New Mexico and  
southern Nevada contact:

Nelco Electronix  
6970 S. Holly Circle, #205  
Centennial, CO 80112  
Telephone: 720-493-9630  
Facsimile: 720-493-9631

In Hong Kong and the People's  
Republic of China contact:

Alphatron  
282, King's Rd.  
13th Floor, Flat C2  
North Point Centre, North Point, Hong Kong  
Telephone: 852-2303-1290  
Facsimile: 852-2900-3616

In Israel contact:  
Phoenix Technologies Ltd.  
3 Gavish St.  
Kfar-Saba, 44424  
Israel  
Telephone: 09-764-4800  
Facsimile: 09-764-4801

Catch our web site at "<http://www.mix-sig.com>"

In northern Illinois and  
eastern Wisconsin contact:

M & S Sales Inc.  
187 Old Sutton Road  
Barrington Hills, Illinois 60010  
Telephone: 847-426-8155  
Facsimile: 847-426-8120

In Indiana, Kentucky, Ohio, Michigan,  
and western Pennsylvania contact:

CCR Electronics, Inc.  
8425 Woodfield Crossing Blvd  
Suite 100  
Indianapolis, Indiana 46240-2495  
Telephone: 317-469-4855

In Korea contact:

H. B. Corp.  
#1409, Seocho World Officetel,  
1355-3, Seocho-Dong, Seocho-Ku,  
Seoul, Korea 137-070  
Telephone: (02)3472-3450  
Facsimile: (02)3472-3458

In the United Kingdom contact:  
Broadband Technology 2000 Ltd  
Unit 3, Woodland Court  
Soothouse Spring  
St Albans  
Herts AL3 6NR U. K.  
Telephone: +44 (0) 1727 791000  
Facsimile: +44 (0) 1727 791001

In Taiwan contact:

Maxtek Technology Co., Ltd.  
5F, No. 13-20, Sec. 6, Min Chian E Road, Nei Hu  
Taipei, 114 R.O.C.  
Telephone: 886-2-2794-6060  
Facsimile: 886-2-2879-8922

In Singapore, Indonesia and  
Malaysia contact:

EXER Technologies (S) PTE LTD  
45 Kaki Bukit Industrial Terrace  
Singapore 416125  
Telephone: (65)-6-747-9669  
Facsimile: (65)-6-749-9669

In Germany, Austria and Switzerland contact:  
ED-V GmbH  
Behringerstrasse 13  
D 63814 Mainaschaff  
Germany  
Telephone: 49 6021 79710  
Facsimile: 49 6021 797144  
Web site: [www.ed-v.de](http://www.ed-v.de)

Send us e-mail at "[info@mix-sig.com](mailto:info@mix-sig.com)"