


NECO SMART WIFI SWITCH

Input voltage: DC/AC 7V-32V	
Max.Current: 2200W/10A	
Wi-Fi Standard: Wi-Fi 2.4ghz b/g/n + Bluetooth	
Working temperature: -20°C to 70°C	
Material: ABS	
Size: 116*38*25mm	

User Guide

1. Download 'Tuya Smart' app in mobile app stores.



2. Register a Tuya Smart account/log in.

3. Power up.

ON/OFF operating principle: the connected appliances work/stop through live wire power on/off.

Led Indicator


- There are 3 LEDs, the LED beside self-lock/inching mode button indicates the working mode (on: self-locking mode, off: inching mode).
- The LED beside on/off setting button indicates WIFI status (enter pairing status: long press the setting button until LED blinks fast).
- And the one below the relay indicates relay on or off status (on: turn on the connected device, off: turn off the connected device).

Add Device

1. Reset the device first:

If the network indicator blinking fast (0.5S/time), skip the reset step.

- Power on
 - Hold down the Match button (anyone) for 5 seconds until network indicator (red light) blinking fast.
2. Tap “+” in the top right corner on Tuya Smart app. Then click ‘auto scan’, wait a few seconds, after the devices are found, click ‘next’.
 3. Select a 2.4GHz Wi-Fi network and enter your password.
 4. Name your device.
 5. When the network indicator is on, the device is online.
 6. When the network disconnected, the switch will automatically switch to the Bluetooth control of the phone.
 7. Click the on/off buttons on the APP can control device, manual control switch also can be display real-time on the APP.

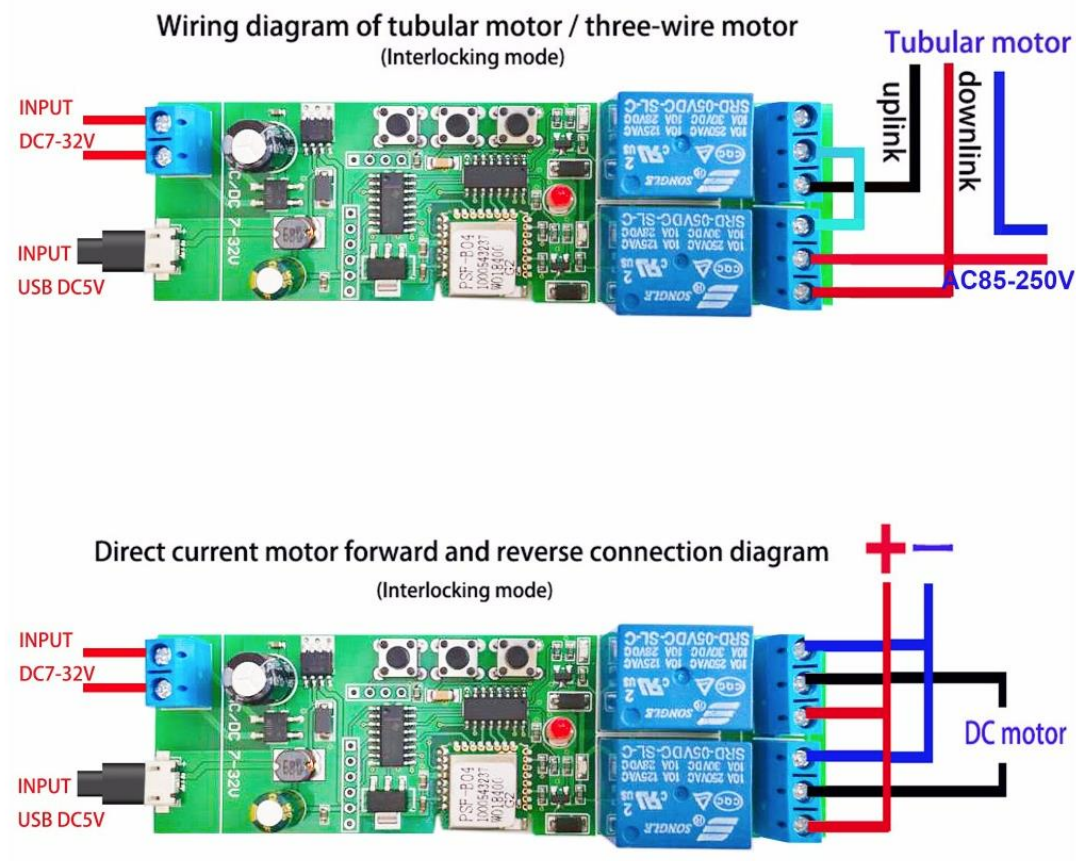

Function:

- Easy to install, you can rename the device, rename each channel, set working mode by channel, you could control 2 garages separately.
- Self-locking mode: Turn on/off connected devices separately.
- Set 8-time schedules for automatic control: It can create 8 enabled single/repeat/ countdown timers to automatically turn on/off devices at the specified time.
And the timers can run themselves even the network is unavailable.
- Sync Status: Real-time devices status provided to App.
- Voice control, the Wi-Fi smart switch can work perfectly with Alexa-enabled devices like Echo/Tap/Dot, as well as Google home. Just with a simply voice command, Alexa or Google Assistant will work for you, turning on/off the connected devices at once.

Control home appliances or electrical devices with your voice like this:

“Alexa, turn on the light.”

“Alexa, turn on Garage door.”

“Hey Google, turn off the bedroom light.”