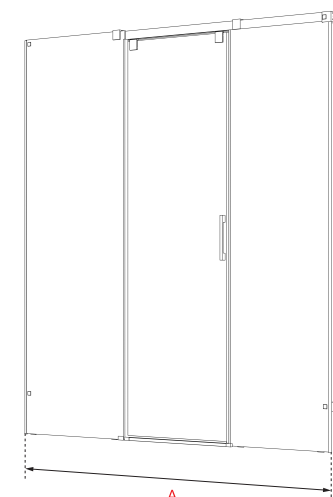





Left side fixed



Right side fixed



Approximate entry calculation: $A/2 - 70$ mm.

Custom - made crossing: 30 mm.

DESCRIPTION

Shower enclosure with one sliding door in the middle and two fixed panels.

DIMENSIONS

- Standard height: 1950 mm.
- Special height: Up to 2200 mm.
- Special width: Consult special dimensions, with total width up to 2600 mm.

SERIE FEATURES



Removable



Anti-limescale



6 mm



Soft close

AVAILABLE FINISHES



CHROME







BLACK-MAT


FEATURES

- Tempered safety glass.
- Parts: Zamak y polyamide.
- Profiles: First-fusion aluminium, alloy 6463 or 6063.
- Seals: UV-stable PVC with antifungal treatment.



Technical description (dimensions in mm)

GUÍA SUPERIOR
D-2075PERFIL BASE
D-2091SOPORTE GUÍA ECO
DERECHA
M02250228075

PATÍN INFERIOR



BOTÓN DE FIJACIÓN

SOPORTE ESQUADRA
VIDRIO/GUÍASOPORTE ESQUADRA
PARED/VIDRIO

TESTING

The product is manufactured according to UNE-EN 14428: 2008, meeting all criteria within this standard, resulting in CE marking.

APPLICABLE TESTS	EVALUATION METHODS	COMPLIANCE CRITERIA	APTO
Cleaning suitability	Visual inspection (4.2)	Free of sharp angles/edges, roughness or burrs (4.2)	✓
Impact resistance/fracture properties	100 mm radius, minimum 40 particles (5.1, 5.2)	Tempered safety glass (4.3)	✓
Corrosion resistance	240 hours in salt spray(4.4.2)	Corrosion resistant (4.4.2)	✓
Resistance to chemicals and stains	Reactants: acids, alkalis, alcohols, bleaches, coloring agents (5.3)	No deterioration or permanent discoloration (4.4.3)	✓
Resistance to humidity and drying cycles	Submerge in water and dry for 50 cycles (5.4)	No cracks, microfissures or discoloration after 50 cycles (4.4.4)	✓
Endurance	20.000 opening and closing cycles (5.5)	No functional deterioration (4.4.6)	✓
Stability	Impact resistance (5.6)	Impact resistance without functional deterioration (4.4.6)	✓
Water retention	Watertightness (5.7)	Retains water (4.4.7)	✓



DECLARACIÓN DE PRESTACIONES
DOP: 02 MAMPARA CORREDERA
UNE-EN 14428: 2008
MAMPARAS DE DUCHA



ISO 14001: 2015
CERTIFICADO DE
GESTIÓN MEDIOAMBIENTAL



ISO 9001: 2015
CERTIFICADO DE
GESTIÓN DE CALIDAD

