

# baty

Venture





# The Baty Venture FV Series

The Baty Venture FV series offers a range of high accuracy, field-of-view inspection machines.

Instant high resolution measurements and user-friendly software.


**Auto Part Recognition** 

**Intuitive Software** 

**20 Megapixel Camera** 

Split Ring & Telecentric LED Lighting

Visit our Website

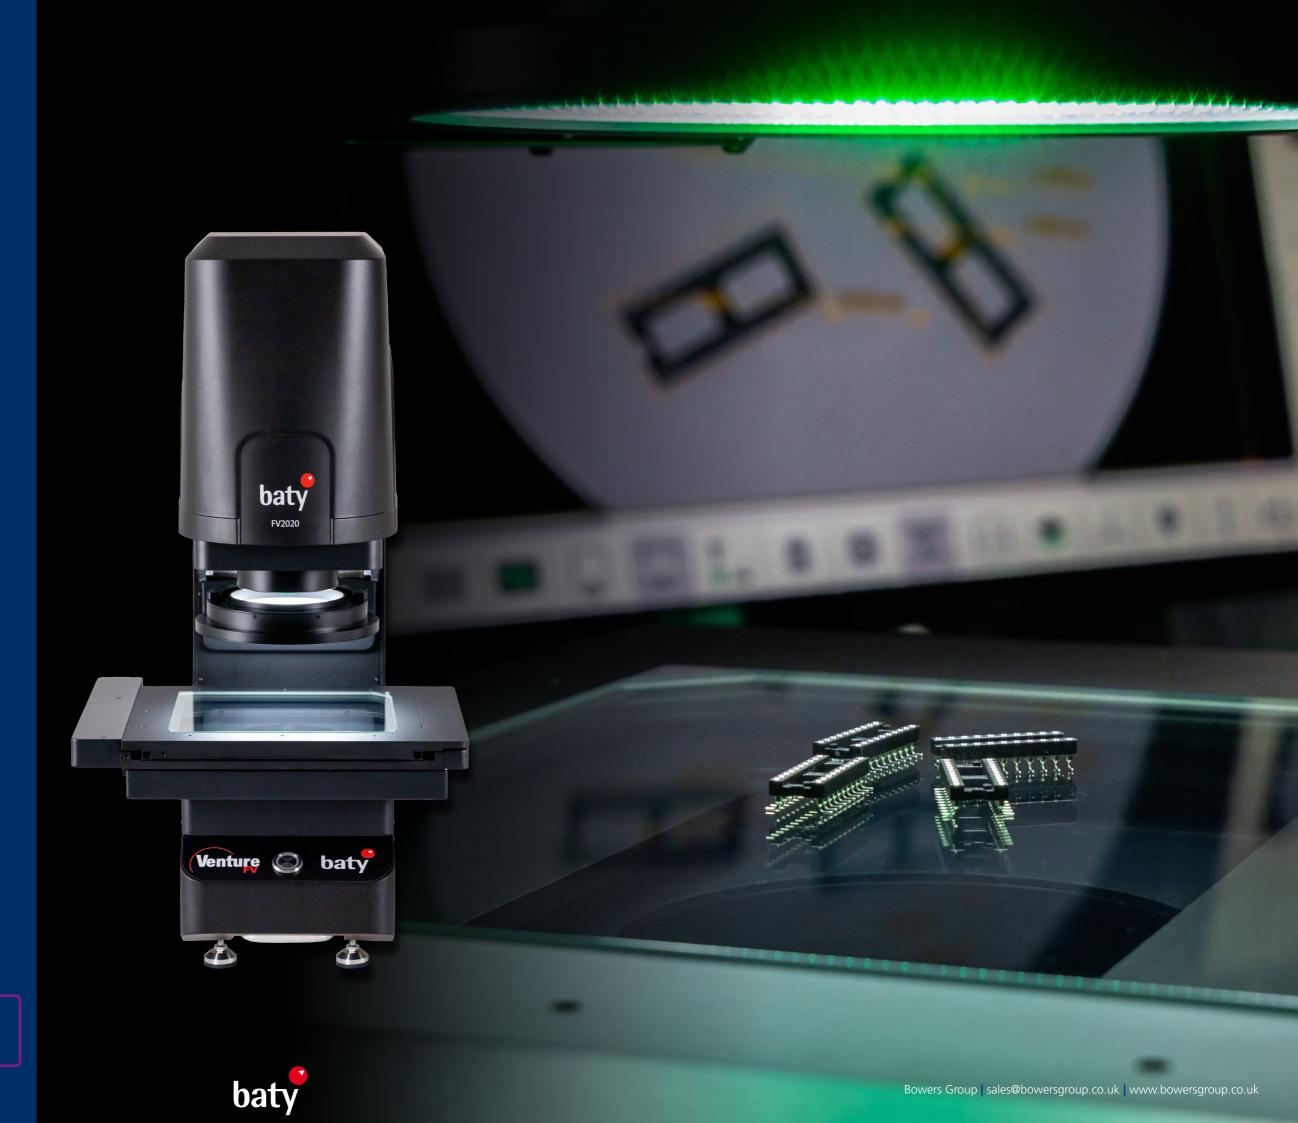



### Instant

- Instant measurements at the push of a button
- Ultra-fast reporting with SPC included
- Character recognition automatically reads & reports individual part numbers during batch measurement
- Hundreds of dimensions in 1 second

# **Highly Accurate**

- Double telecentric optics for high resolution
- Motorised auto focus
- Auto feature edge detection removes operator influence

# **User Friendly**

- Simple, intuitive software and user interface
- Automatic measuring and dimensioning
- Auto Import dimensions and tolerances from CAD




### Easy Batch Measurement

- Single or batch measurements performed in seconds
- Multiple lighting options for surface and profile features
- Intuitive, simple user interface



# **High Quality Optics**

- 20-Megapixel CMOS
- Large telecentric optics
- Newly developed sub-pixel edge detection algorithms

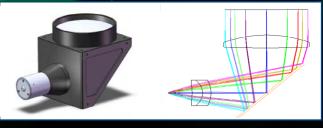







# Ultra Fast Dimensional

### Measurement

Create instant measurements by simply placing known components randomly on the stage. New parts can be easily measured by automatically extracting features from the scanned image and adding dimensions to create an inspection which is then saved for future use.

Automated part inspection with additional CNC playback for parts larger than the field of view. Fast set up and inspection time to achieve reduced production costs.


### Automatic Part Recognition

No need to select a program or orientate a part with automatic part recognition. The intuitive software will recognise the part, select the inspection program and measure each part in the batch, saving time and eliminating operator error.

# Simultaneously Measure

# Multiple Parts & Measurements

Quickly and accurately measure hundreds of dimensions on hundreds of parts in seconds using multiple lighting conditions. Instant on screen pass/fail classification for the inspector, with detailed reports automatically saved to your preferred location.

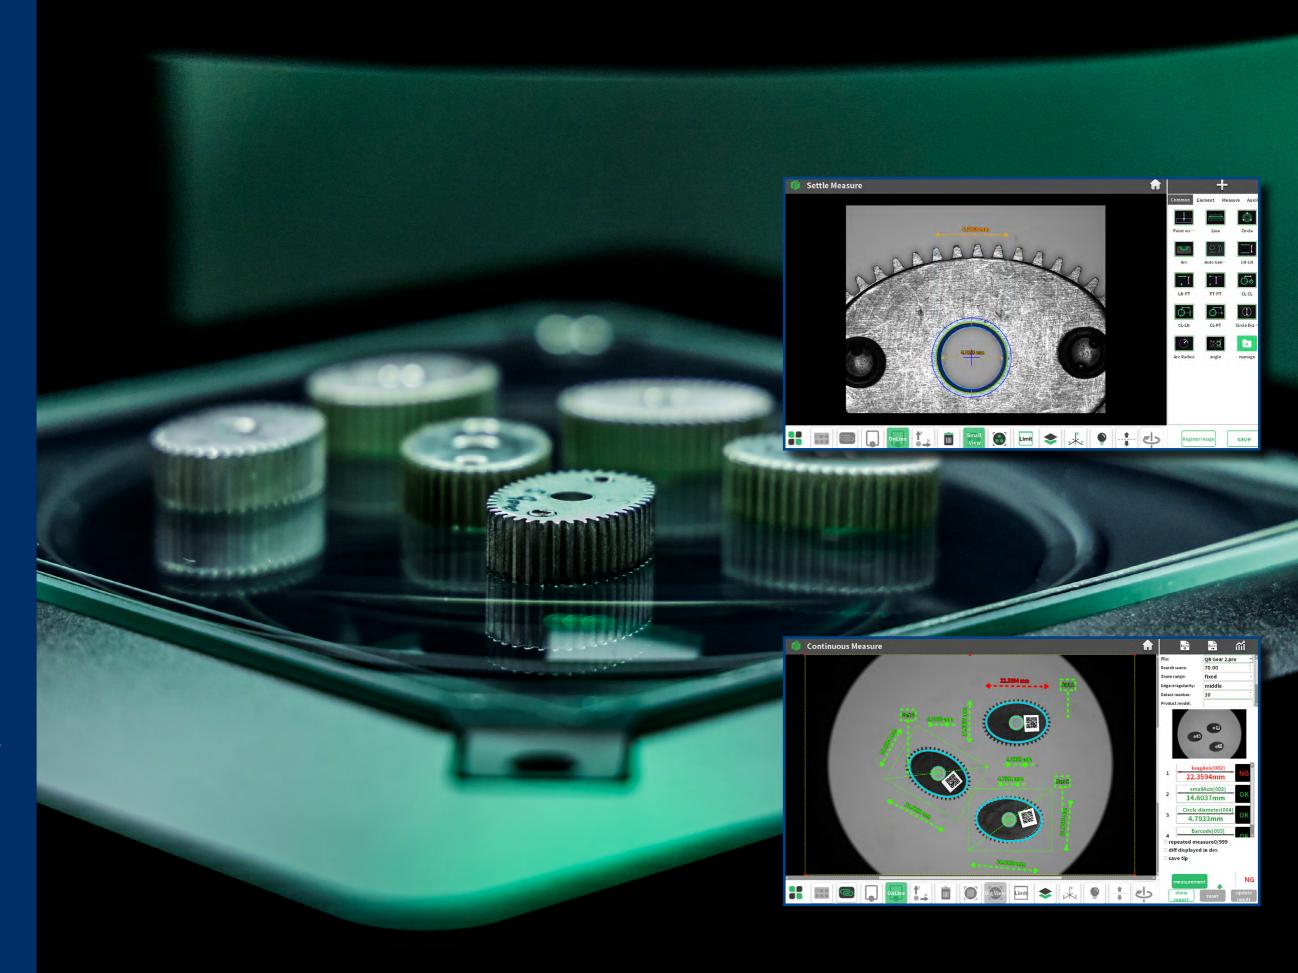





# Large Field-Of-View

Large diameter telecentric optics with motorised auto-focus range of 75mm combined with a measurement area of up to 300x200mm. Motorised split-ring LED ring light, and telecentric profile lighting as standard on all models.

# Programmable Led Ring Illumination

Programmable, segmented, split ring LED surface lighting is standard on all FV models. This allows the edges of features to be accurately defined for automatic detection by the software.


The motorised ring light can also be driven in the vertical axis to highlight features with minimal height. In addition, optional Coaxial lighting can be introduced for parts with surface features such as blind bores.

# Automatic Programming From

# CAD

Create full inspection programs before the part is made. Our 'PROGRAM FROM CAD' feature can import all features, dimensions and their associated tolerances directly from the CAD file. Ready for the parts to be measured and classified as soon they are placed on the stage.standard on all models.

# Visit our Website

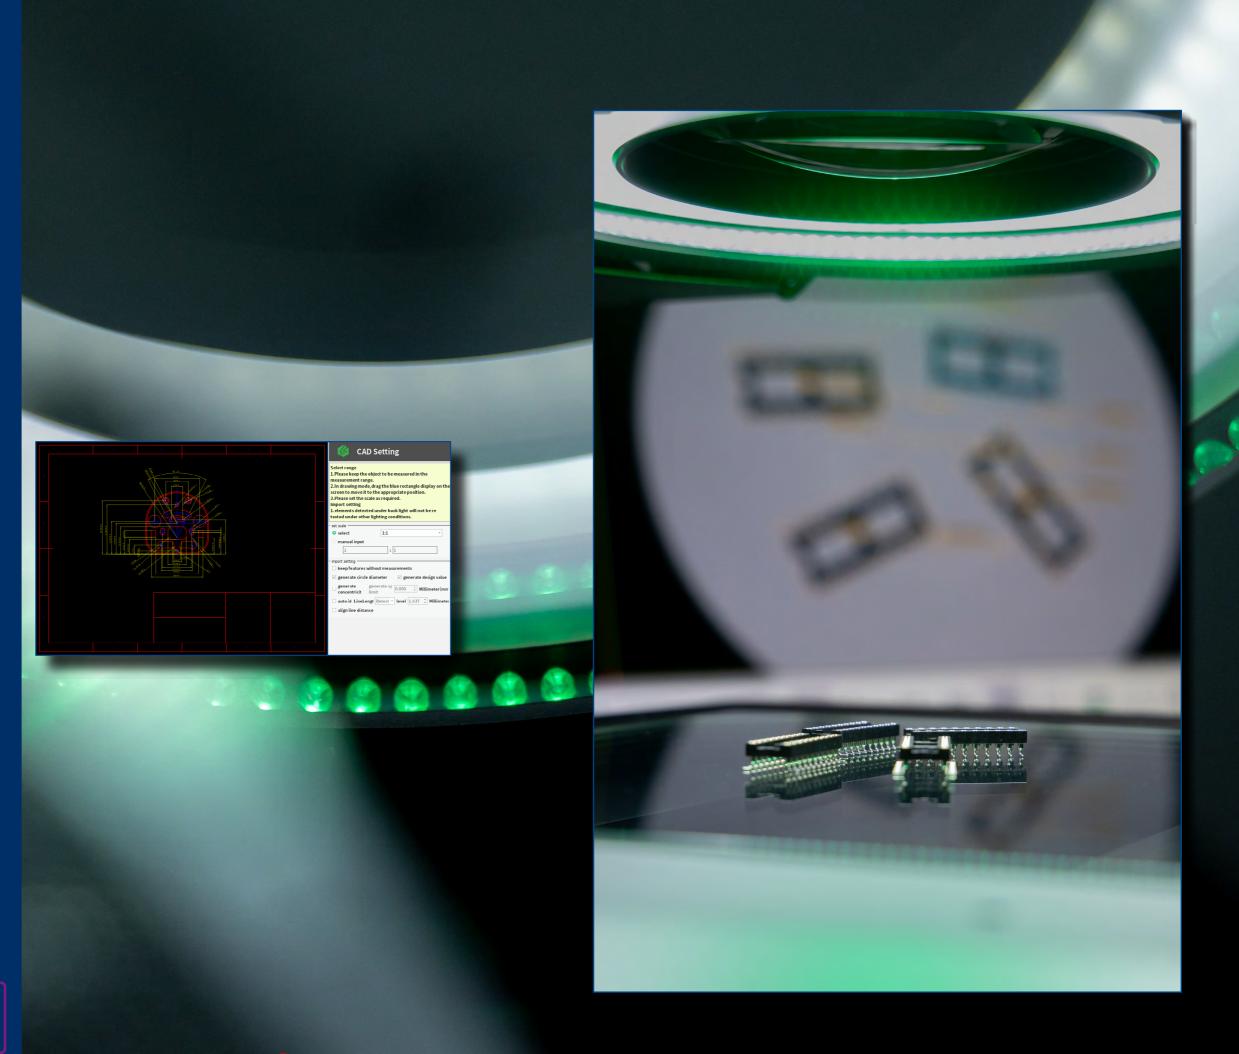




# Stable & Robust Construction

The high precision, CNC work stage utilises heavy duty cross-roller rail guides for optimum performance and accuracy.

The heavy duty chassis casting provides a stable foundation for the substantial motorised X-Y measuring stage. Ensuring correct alignment is maintained to the motorised focus and lighting axes.



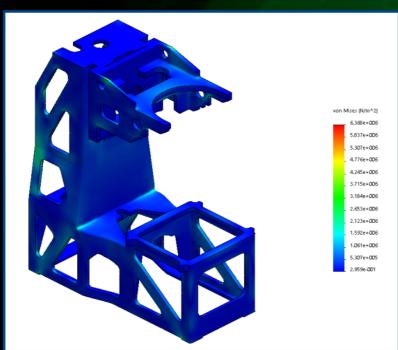

# Optional Coax Lighting

Coaxial lighting enables a crisp high resolution image to be achieved on all surface features, even at the bottom of a blind bore or taper. This option is available on all models.

# Visit our Website







# User Friendly Software

- Simple and intuitive user interface designed with operator in mind.
- Easy to use software allows creation of new inspections quickly and easily with minimal experience.
- Dedicated functions for measuring gears, threads, O rings and springs.
- CAD Import enables user to compare profiles to CAD model.
- Auto-create complete inspections from an imported .dwg file, including dimensions and tolerance information.
- Easy reporting including on screen pass / fail classification.



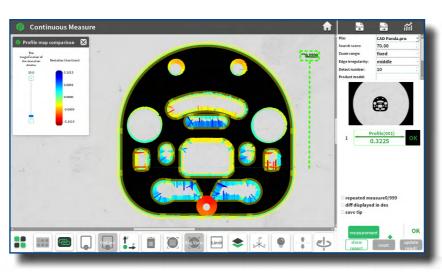

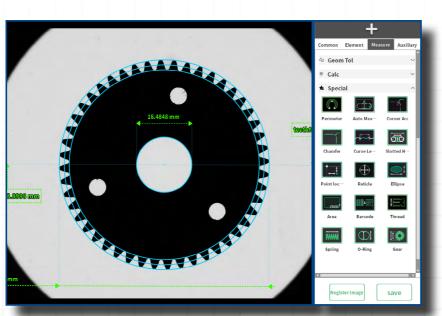








# Automatic Inspection Reports

A range of Excel compatible reports are immediately available after each inspection, providing measurement data for each measurement including a pass / fail classification. Single part reports include a dimensioned image of the part for easy comparison to the drawing.

Batch inspection results are conveniently compiled into a single batch report. Using character recognition, the sw automatically detects identification numbers on each part and then lists the measured results against each part number.

SPC data reports are also included as standard including normal distribution curves and CP, CPK calculations to monitor process capability.

Visit our Website

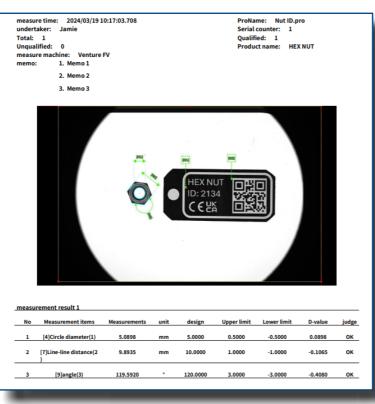

		Statistic	al value	Trend ch	art	Hist	ogram	Data	view			
,	determination	Machine	undertaker	~ [1]0CR	(1) [2]Ba	arcode(2)	[4]Circle diam	eter(1)	[7]Line-line dista	nce(2)		
ı	ок	Venture FV	Jamie	ID:213	4 Nu	ut 2134	5.0898		9.8935	-		
2	ок	Venture FV	Jamie	ID:432	1 Nu	ut 4321	5.0492		9.9225	_		
	ок	Venture FV	Jamie	ID:123	4 Nu	ut 1234	5.0493		9.9226	_		
	ок	Venture FV	Jamie	ID:678	9 Nu	ut 6789	5.0924		9.9258	_		
	ок	Venture FV	Jamie	ID:987	6 Nu	ut 9876	5.0915		9.9289	_		
	OK	Venture FV	Jamie	ID:769	8 Nu	ut 7698	5.0924		9.9223	-		
				Statistic	al valu	ie T	rend chart		Histogram	Data v	iew	
					ExtractS	Scope: 20		Name: Nut ID.pro 10:09:40.810-2024-03-19 10:39:40.810 DesignVal			ignVal	
A	deasurement d	measure number		8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	/	Sta	tistical value	Tre	nd chart	Histogram	3σ 100.000 2σ 100.000 σ 83.333%	9%
		L meas			FileName: Nut ID,pro ExtractScope: 2024-03-19 10:09:40.810-2024-03-19 10:39:40.810							
		0			122							123
				ae B	121							DesignVal
		Т		Measur	119							120
					118							
					117		1 2	m	asure numb	4 5 er	6	LowerLimitVal

System Configurator	FV-1080	FV-2020	FV-3020
Measuring Range	100 x 80mm	200 x 200mm	300 x 200mm
Single / Dual Field	Single	Dual	Dual
Camera	20 Megapixel	20 Megapixel	20 Megapixel
Motorised Auto-focus	Standard	Standard	Standard
Stage	Fixed	CNC	CNC
Split Ring Motorised LED Ringlight	Standard	Standard	Standard
Optional Coaxial Lighting	Yes	Yes	Yes
Optional 3D Chromatic confocal sensor (Z axis measurement)	No	No	Yes







**FV-2020** with Optional Coaxial Lighting





# Find Out More

To find out more about the Venture FV series including return on investment, please contact:

E: sales@bowersgroup.co.uk

W: www.bowersgroup.co.uk/contact-us

T: +44 1276 469866

# Comprehensive Service &

# Support

To find out more about the Venture FV series including return on investment, please contact:

E: service@bowersgroup.co.uk

W: www.bowersgroup.co.uk/contact-us

T: +44 1276 469866



