


WT-ZIPP-HTS

HIDDEN TENSION ZIPPED WINDOW TREATMENT



future automation

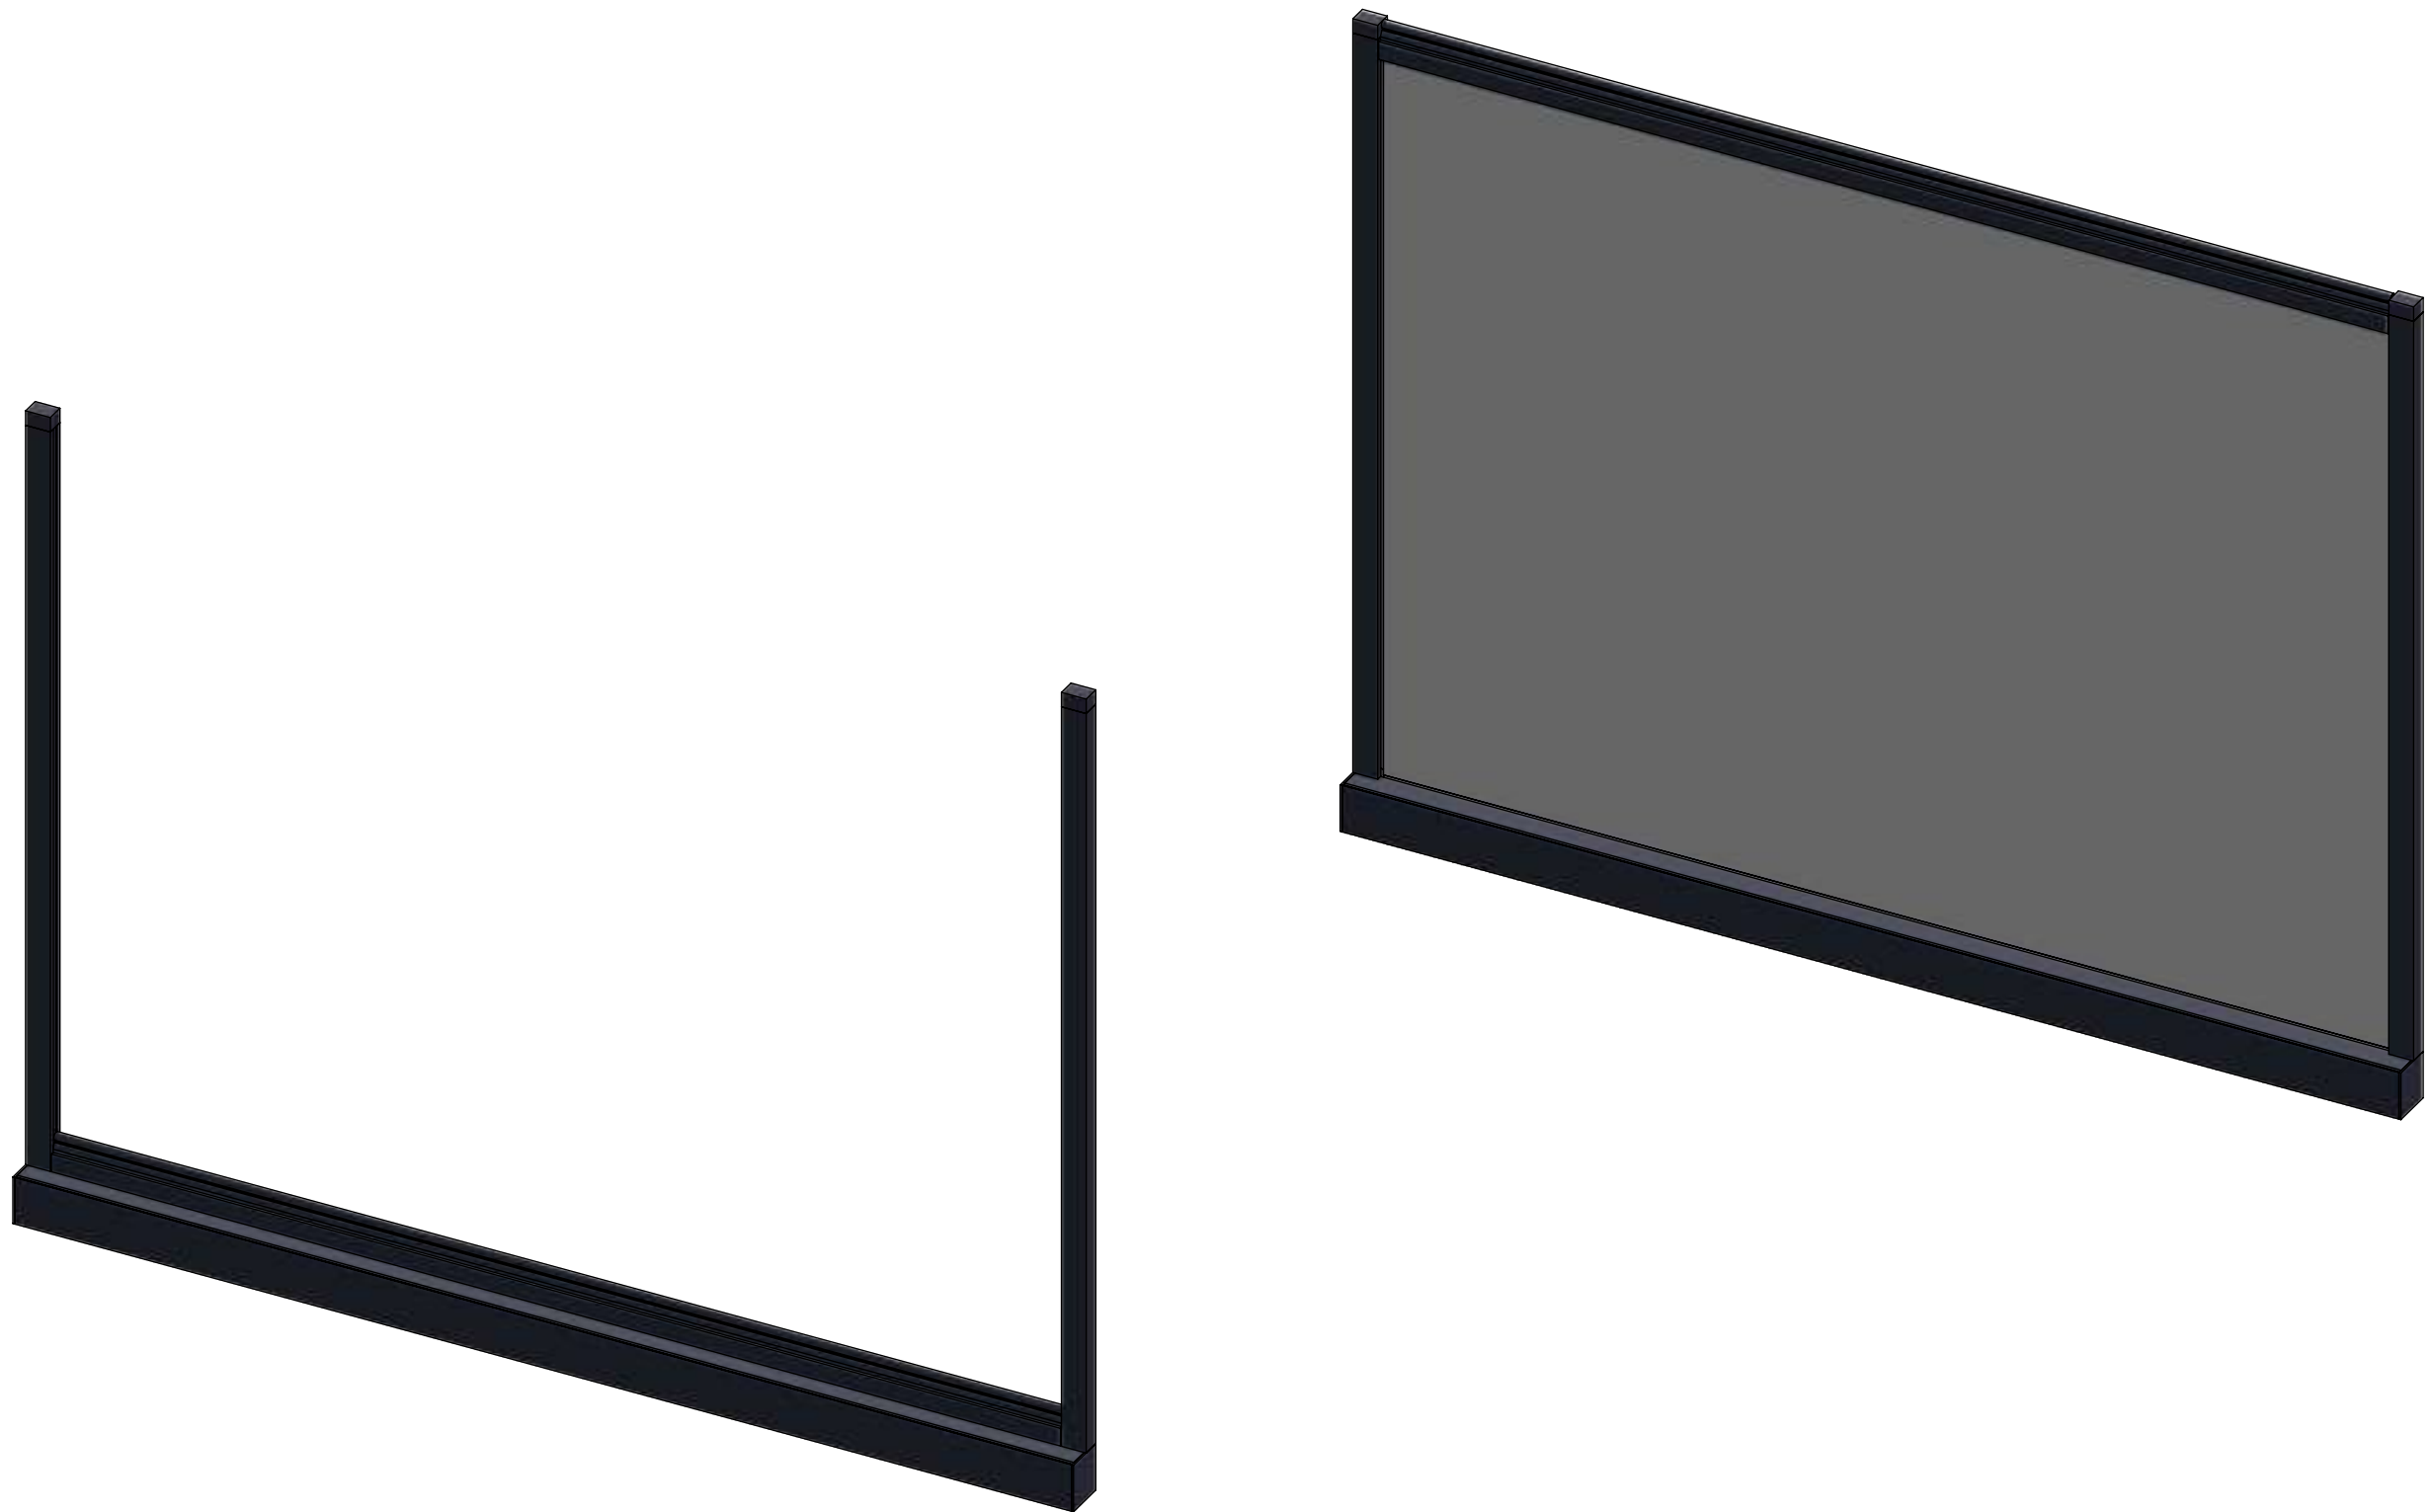

WT-ZIPP-HTS

HIDDEN TENSION ZIPPED WINDOW TREATMENT




future automation

SYSTEM DIMENSIONS

Dimensions apply for all variants of the WT-ZIPP-HTS.

NOTE:
It is recommended to make a 5mm [1/4"] deduction from all sides of the Aperture to allow for variation in the aperture dimensions for a perfect fit.

The system can then be shimmed in place and caulked for a seamless install.

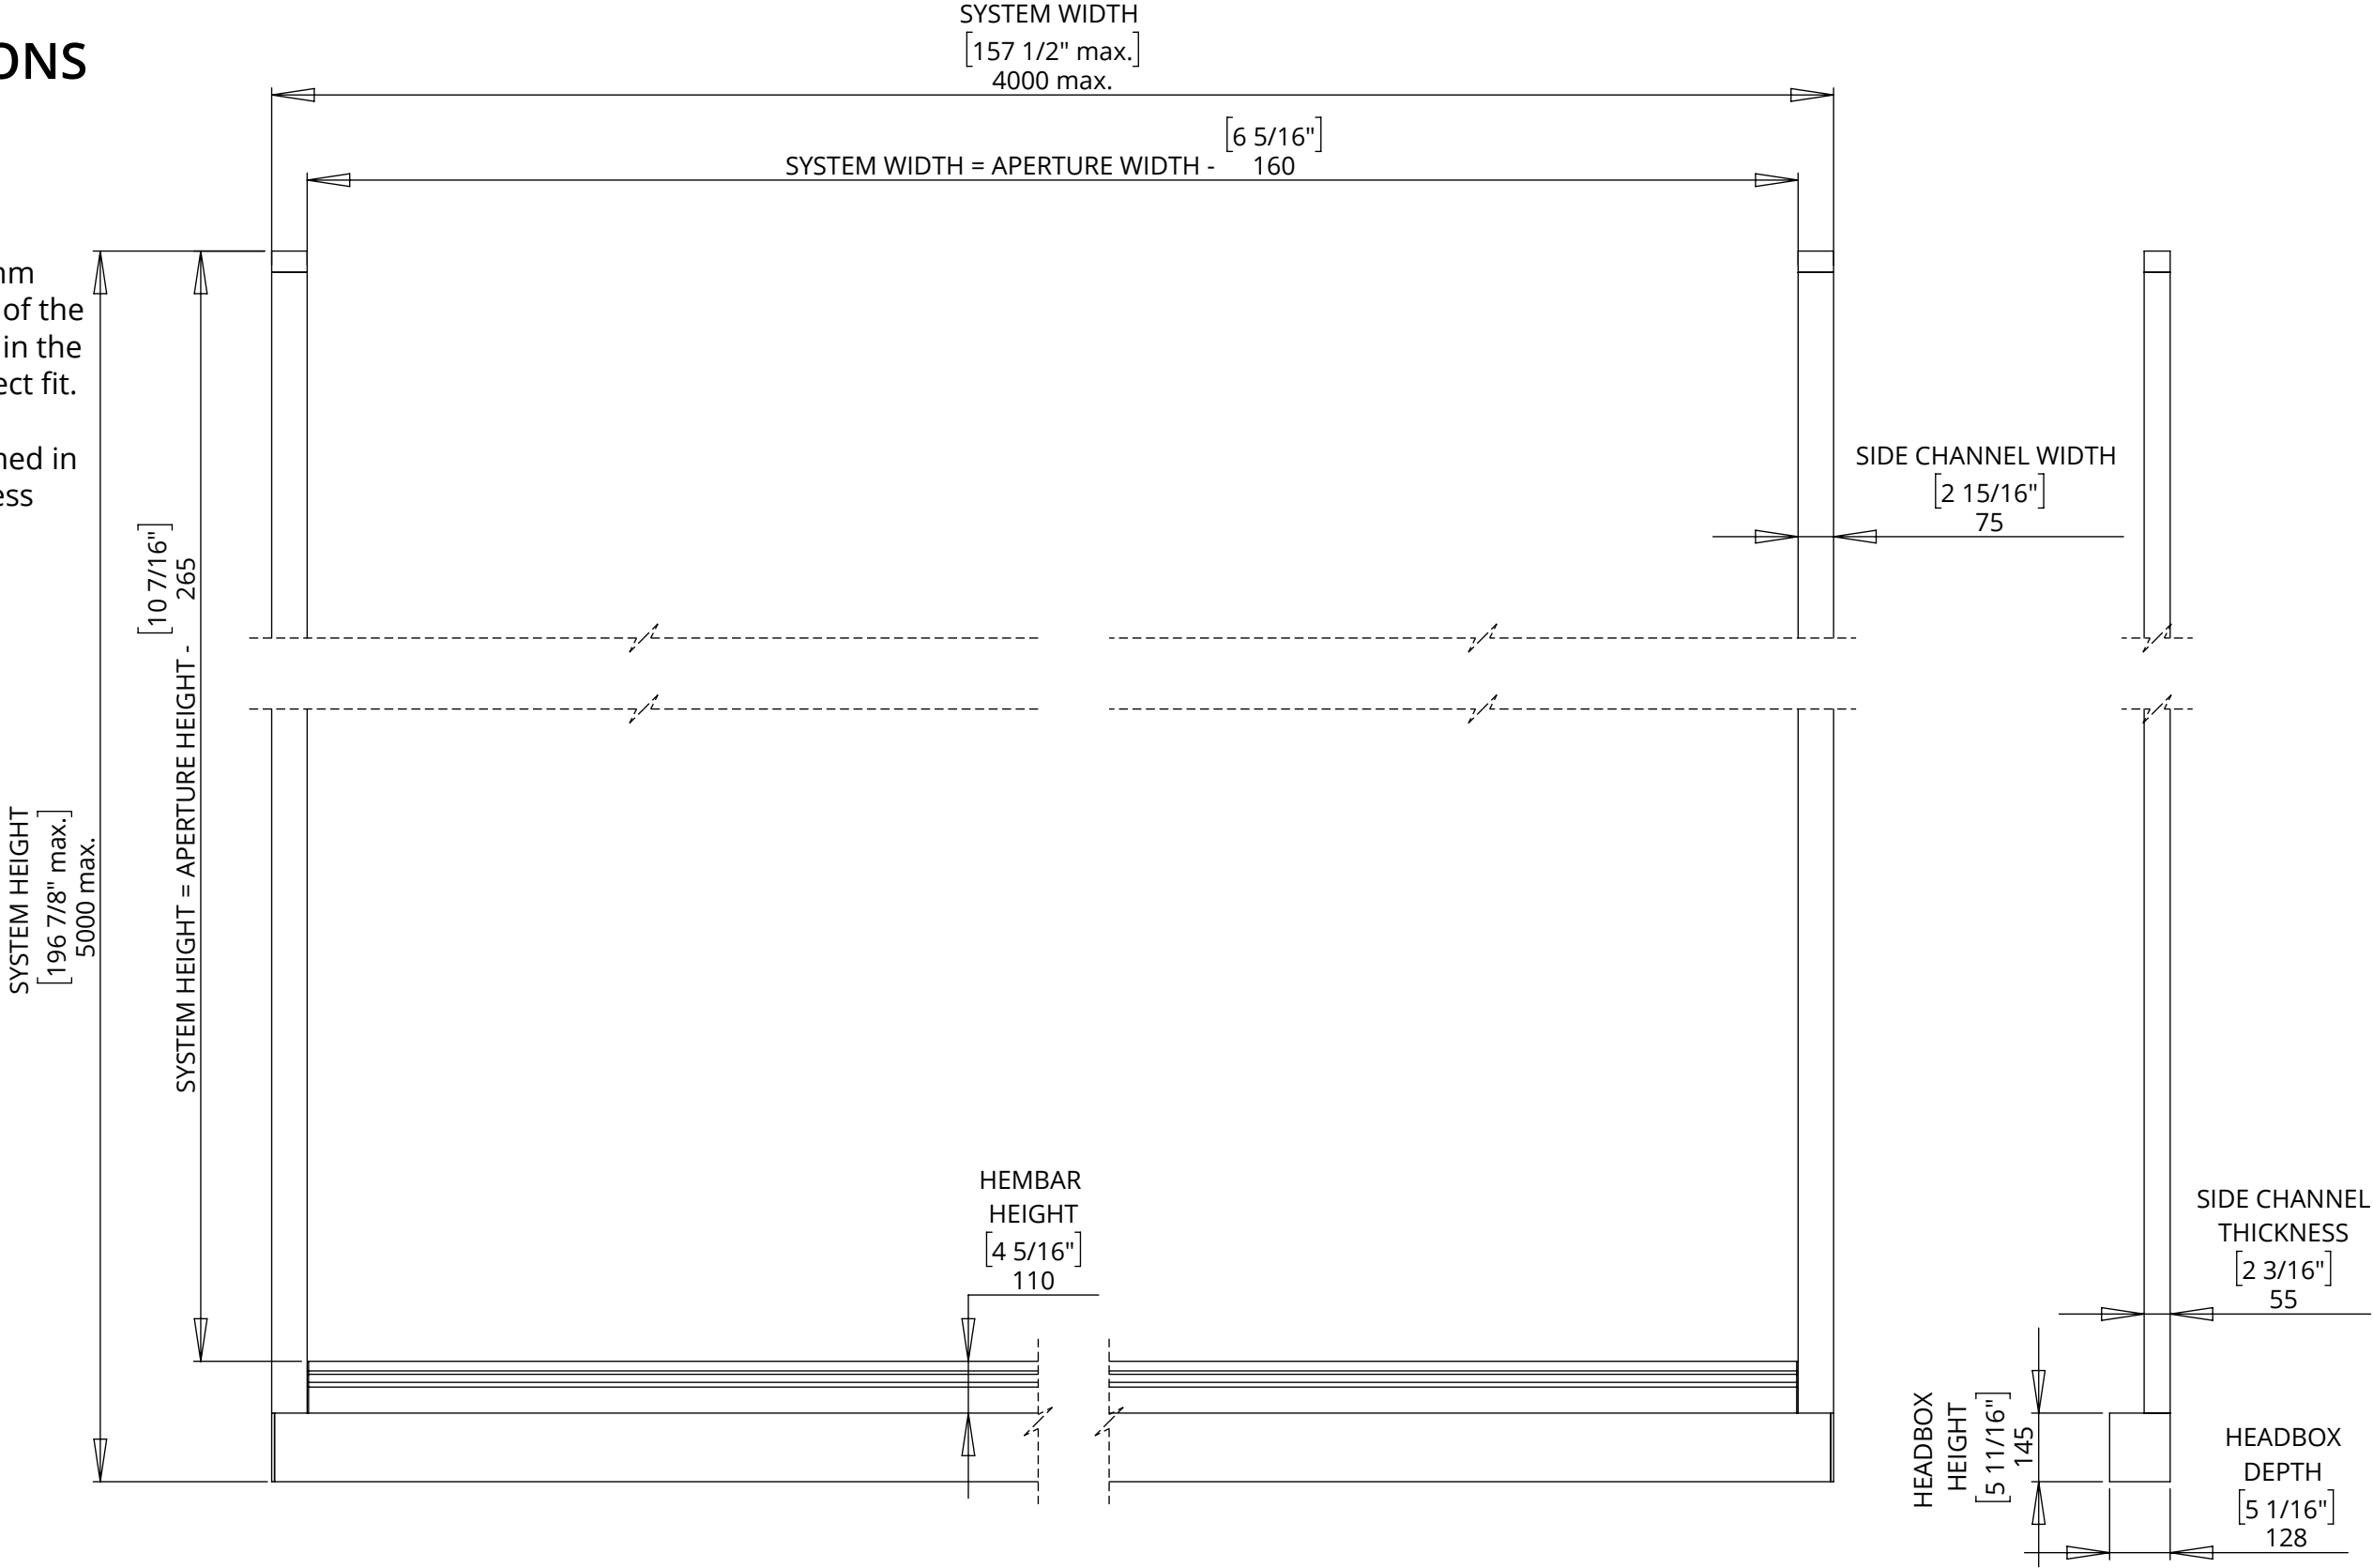

WT-ZIPP-HTS

HIDDEN TENSION ZIPPED WINDOW TREATMENT




future automation

PRODUCT OVERVIEW

STANDARD COLOUR OPTIONS,
RAL 9005 - BLACK, SATIN FINISH
RAL 9910 - HIPCA WHITE, SATIN FINISH



CUSTOM RAL OPTION ON ALL METALWORK

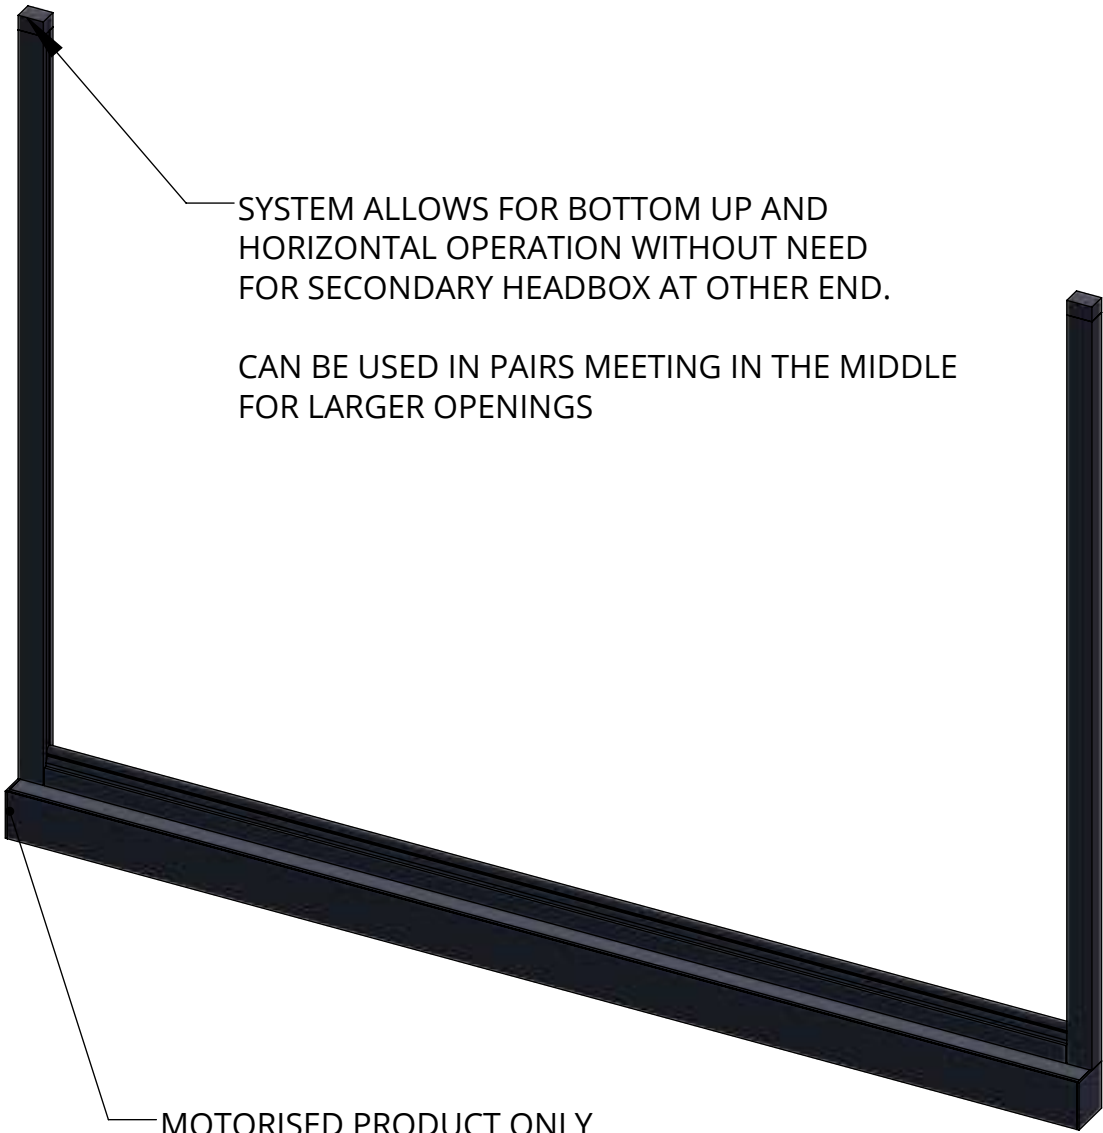

SYSTEM ALLOWS FOR BOTTOM UP AND
HORIZONTAL OPERATION WITHOUT NEED
FOR SECONDARY HEADBOX AT OTHER END.

CAN BE USED IN PAIRS MEETING IN THE MIDDLE
FOR LARGER OPENINGS

MOTORISED PRODUCT ONLY
230V (110V AVAILABLE ON REQUEST)
DRY CONTACT, RF AND LIVE MAINS OPERATION

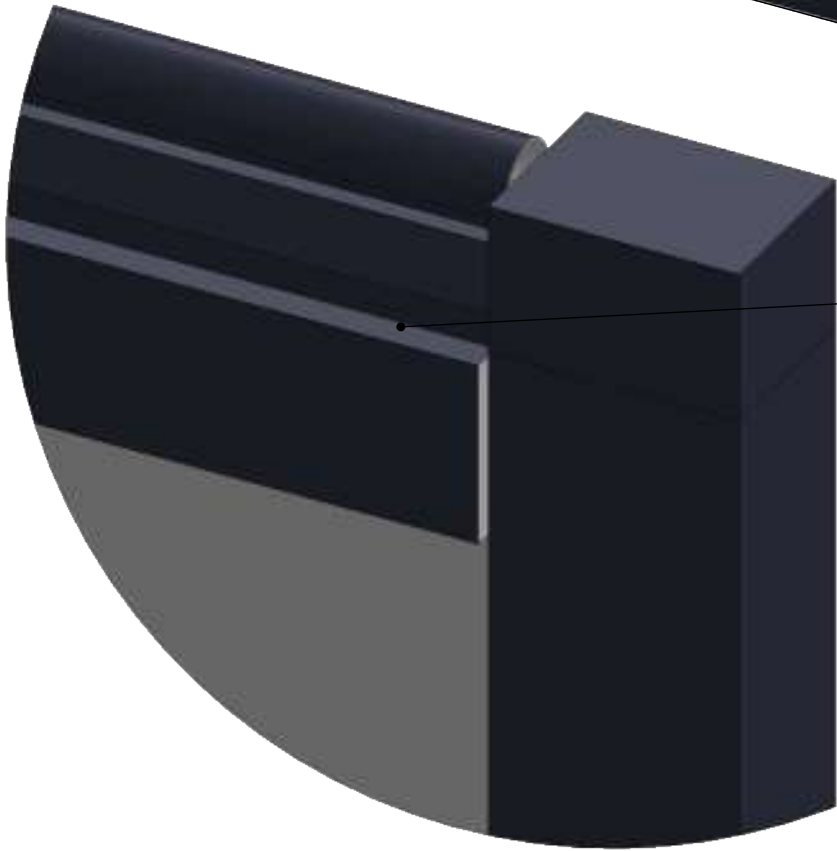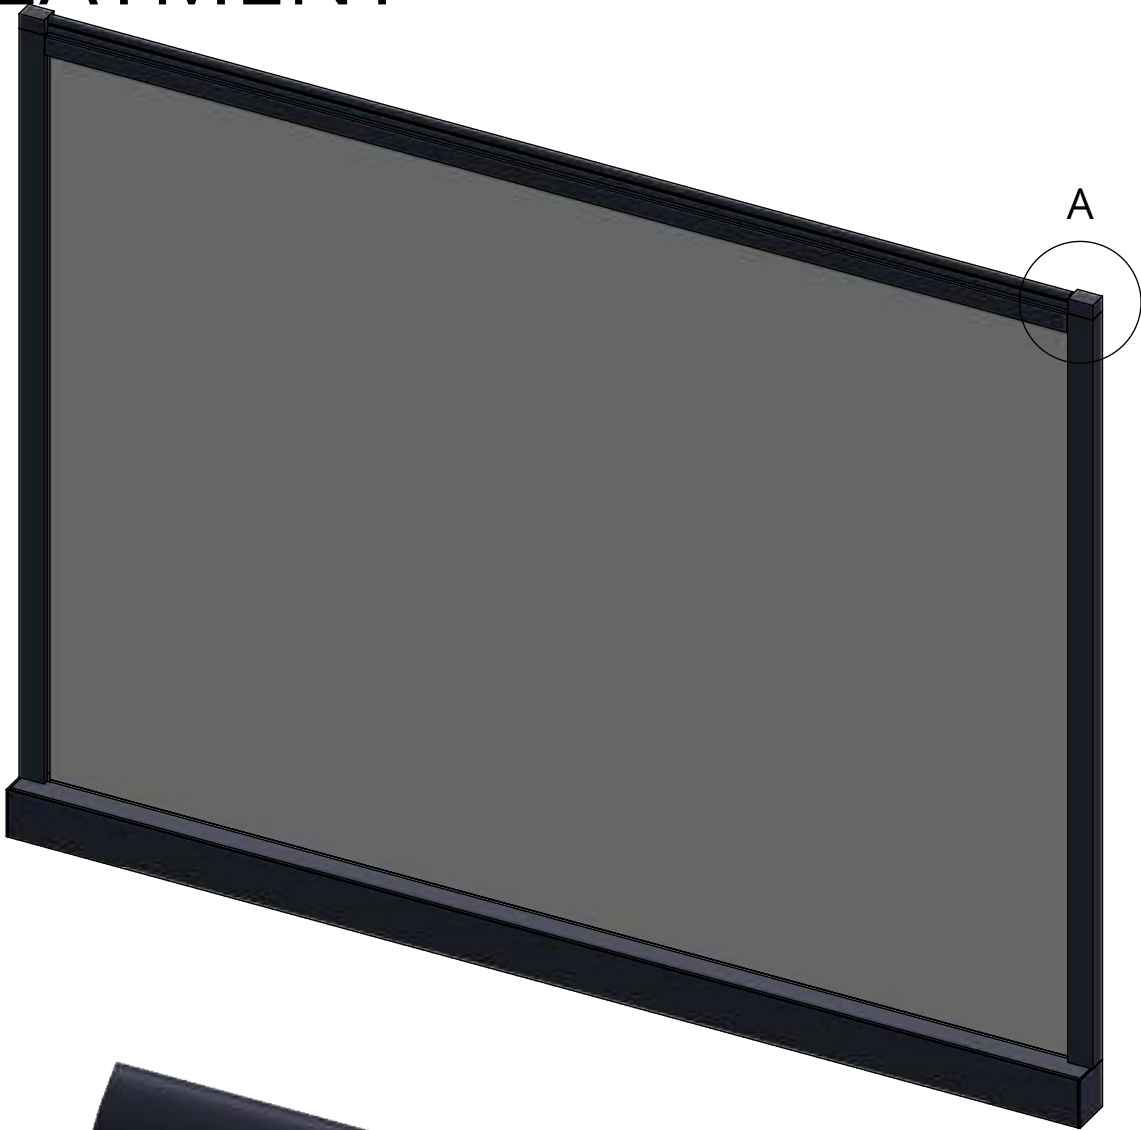

HEMBAR TRAVELS TO END
OF SIDE CHANNELS, LARGE
RUBBER SEAL AT END OF
HEMBAR CLOSSES GAP TO
REVEAL TO BLOCK OUT LIGHT