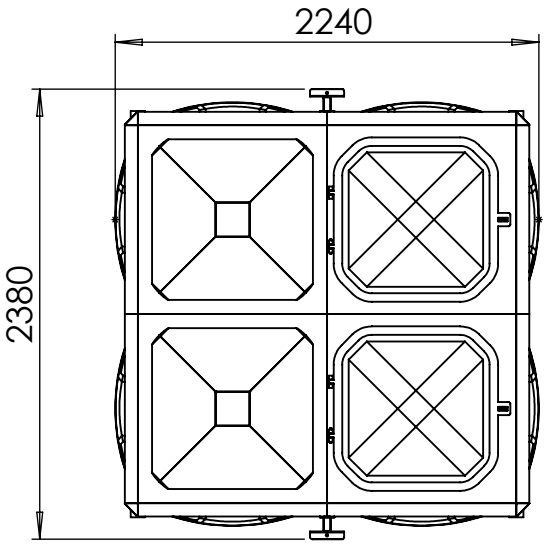

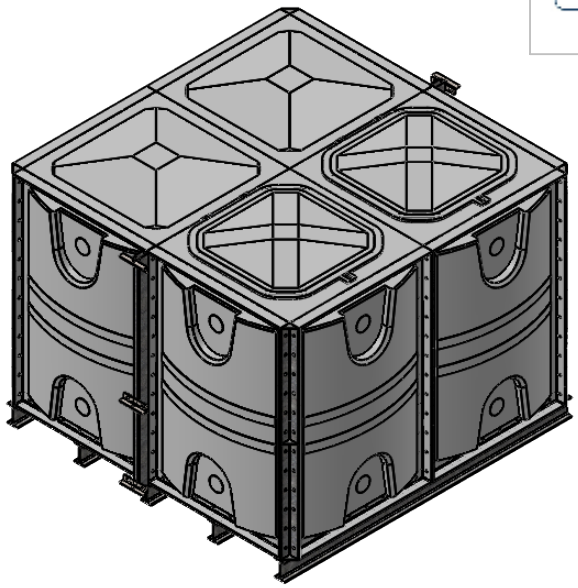

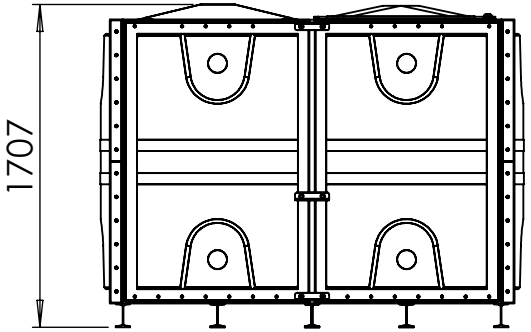

CENTRAL INTERNAL DIVIDER

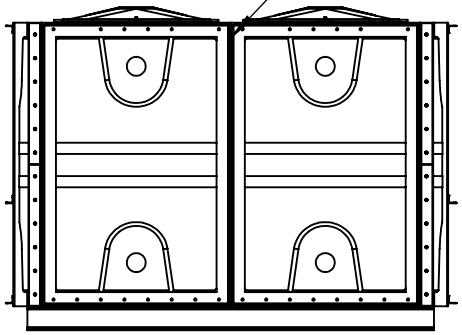

TITLE: PW.2x2x1.5.IFB.DIV.AG	NOTE: Purewater sectional tanks must be fully supported on a flat, level & continuous foundation which provides structural support to the tank when full to maximum capacity. It is essential that the installer and/or user refers to the conditions of the installation document prior to the installation of the tank. Under no circumstances should any part of the tank structure be used to provide support to pipework and/or any ancillary items.	DESCRIPTION: PW.2x2x1.5.IFB.DIV.AG Sectional cold water storage tank c/w manway access.	TANK SPECIFICATION :	
DRAWN BY: C.Larkin	DATE: 16/04/2024			
CUSTOMER: CUSTOMER	ALL DIMENSIONS+/- 5mm UNLESS OTHERWISE STATED	A4	ALL DIMENSIONS IN MM - DO NOT SCALE	SCALE:1:40 SHEET 1 OF 1

INTERNAL DIMENSIONS	2000 x 2000 x 1500mm
EXTERNAL DIMENSIONS	2380 x 2240 x 1707mm
NOM. CAPACITY	6000 Litres
INSULATION THICKNESS	50mm
MATERIAL	Hot press moulded GRP