
Integrateable Coil Antenna

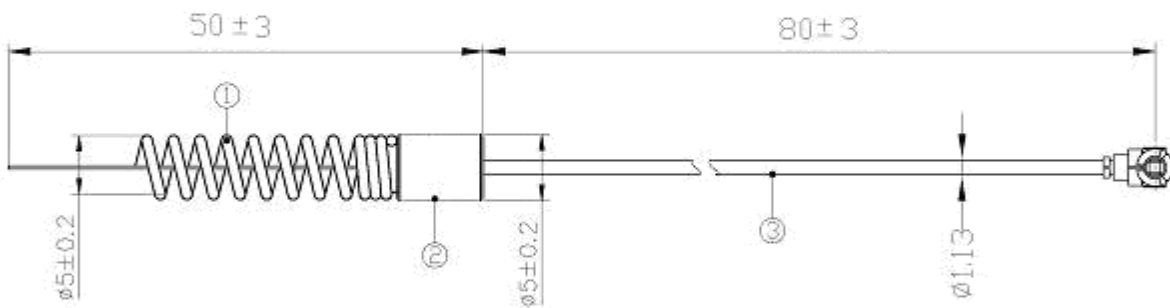
- Integrateable
- Ground Independent
- 2.4GHz





RoHS

Category	Overall performance
Frequency Band	2.4GHz
Nominal Impedance	50 ohm
Polarazation	Vertical
Return Loss	Gain 1~1.5 dbi
V.S.W.R	<2.0 : 1
	Mechanical Parameters
Antenna Material	Coil Type (Copper tube)
Connector	Ø1.13Cable/ 80 ±3 + I-PEX Connector
Dimension	Ø5.0 ±0.2mm
Antenna Color	Copper tube
Operating Temperature Range	-20°C – +60°C
Storage Temperature Range	-30°C – +70°C

NO.	NAME	FINISH	Q, TY
01	Coil	Steel carbon	01
02	Copper tube	Nickel plating	01
03	∅1.13Cable+IPEX	Black	01



 Third angle projection	CUSTOMER'S	MODEL	PARTS NUMBER	FREQUENCY	UNIT	SCALE	DATE	VERSION
					M/M			1
	TOLERANCE	X. XX±0.15	NAME	PARTS NUMBER	APPROVED	CHECKED	DRAWING	DESIGNED
	SURFACE ROUGHNESS	\sqrt{S}	APPEARANCE					

1. Frequency

