


40mm Encapsulated  
RHS Steel Bracing

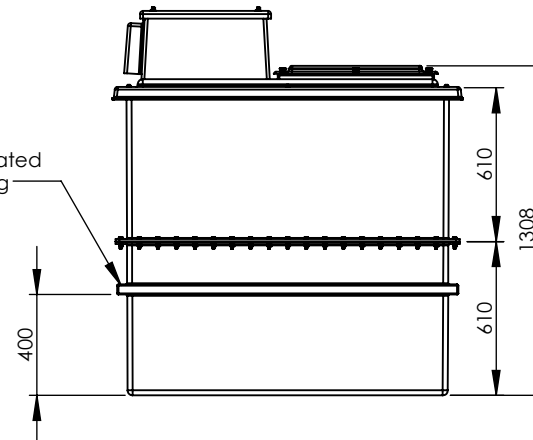

TITLE  
PW1818.INS-2.AB.4

DRAWN BY C.MORRIS DATE 05/12/2017

CUSTOMER

**NOTE:**  
All Purewater tanks must be fully supported on a flat level & continuous foundation providing structural support to the tank when full to maximum operating capacity. It is essential that the user refers to the conditions of installation document prior to the installation of the tank. Under no circumstances should the tank body be used to provide support to pipework and ancillary items. The tank lid is a structural part of the tank and must be in place and fitted correctly when water is contained within the tank.

ALL DIMENSIONS +/- 5mm  
UNLESS OTHERWISE STATED

A4

**DESCRIPTION:**

PW1818-2 piece cold water storage tank  
c/w raised float valve housing to provide an  
AB Air gap

ALL DIMENSIONS IN MM - DO NOT SCALE

DATE	VERSION	NOTES
02/10/2017	A	FIRST ISSUE

**TANK SPECIFICATION :**

INTERNAL DIMENSIONS	1220 x 1220 x 1220mm
EXTERNAL DIMENSIONS	1390 x 1390 x 1525mm
NOM. CAPACITY	1818 Litres
DRY WEIGHT	125 KG
INSULATION THICKNESS	25mm
WRAS CERT. NUMBER	131006
MATERIAL	GRP

**purewater**  
storage ltd

SCALE:1:30

SHEET 1 OF 1