
SMT GPS Active Patch Antenna

- Very small patch 10mm
- SMT mount
- High performance
- 15 dB LNA
- Low power consumption

ADA-10RA-22 is a super compact, SMT easy mount, high performance active GPS antenna module. It's unique in it's kind and specially designed for small integrated devices and low cost production creating high yield.




RoHS

Specification

Category	GPS
Frequency	1575.42 ± 1.023 MHz
Polarization	R.H.C.P.
Antenna Gain	Typ. -3 dBic
Bandwidth	3 MHz min @S11-10 dB.
Antenna Dimensions	10 x 10 x 4 mm
	LNA
Supply Voltage	1.8 VDC - 3.0 VDC - 5.5 VDC
Power consumption	2 mA - 4.6 mA - 10mA
Total Gain	12 dB - 14dB - 15dB
Impedance	50 Ω
V.S.W.R	< 2.0 : 1
	Overall Performance
Frequency Range	1575.42 ± 1.023 MHz
Gain	11 ± 4dBic @ Zenith
Output Impedance	50 Ω
Output V.S.W.R	2.0 Max
GPS part size	10 x 10 x 11.50 mm
Weight	25 ± 0.5 grams
Mounting	SMT
Operating temperature	-40 — +85 ° C
Storage temperature	-40 — +105 ° C

LNA Gain and Out Band Rejection @ 3.0V

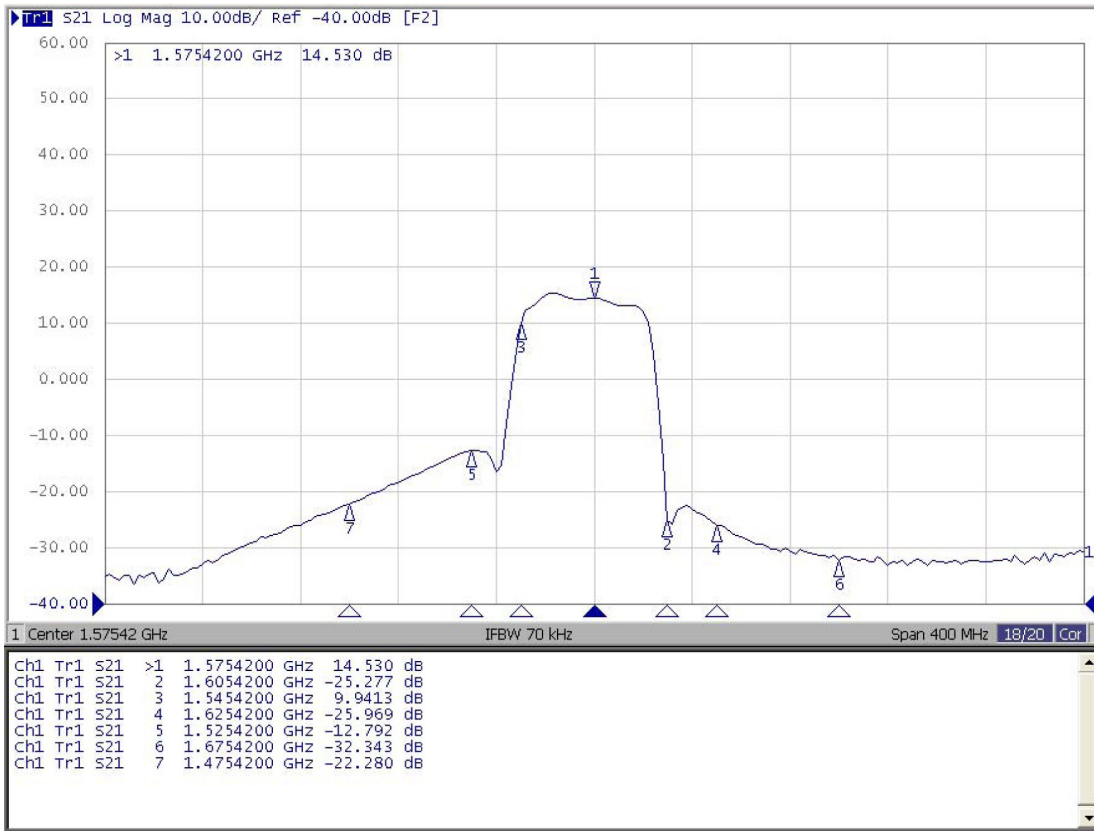

Ordering codes

TYPE	Description	Comment
ADA-10RA-22	SMT GPS Antenna	GPS antenna module

For the latest updates, visit our Web site: www.adactus.se

Disclaimer

Information furnished is believed to be accurate and reliable. However, Adactus assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Adactus reserves the right to make changes without further notice to any product herein to improve reliability, function or design. Adactus does not assume any liability arising out of the application or use of any product described herein.

This publication supersedes and replaces all information previously supplied. Adactus products are not authorised as critical components in life support devices or systems.