

---

### Swivel Whip Antenna


---

- **Robust swivel antenna**
- **Different frequency bands available**
- **Gain 1,5 dBi**

ADA- 0186/0196 is a robust swivel whip antenna 0-90° with three distinct “snap in” positions 0-45-90°.

ADA- 0186/0196 is available with the frequency bands:


- 868 MHz,
- 850/900/1800/1900 MHz
- 2400 MHz (2.4 GHz)

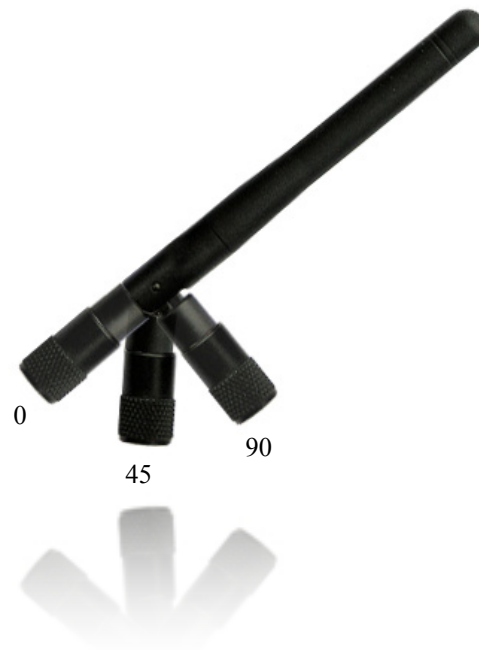

## Specification ADA-0186/ADA-0196

Category	Overall performance
Frequency	868, 850/900/1800/1900, 2400 MHz
Impedance	50 $\Omega$
Gain Average	1.5 dBi
Polarization	Vertical
Electrical wave	$\lambda/2$ Dipole
V.S.W.R	< 2.0
Antenna Cover	TPE EL630, Black
Operating Temp	-20° - +60°
Storage Temp	-30° - +70°

### ADA-0186

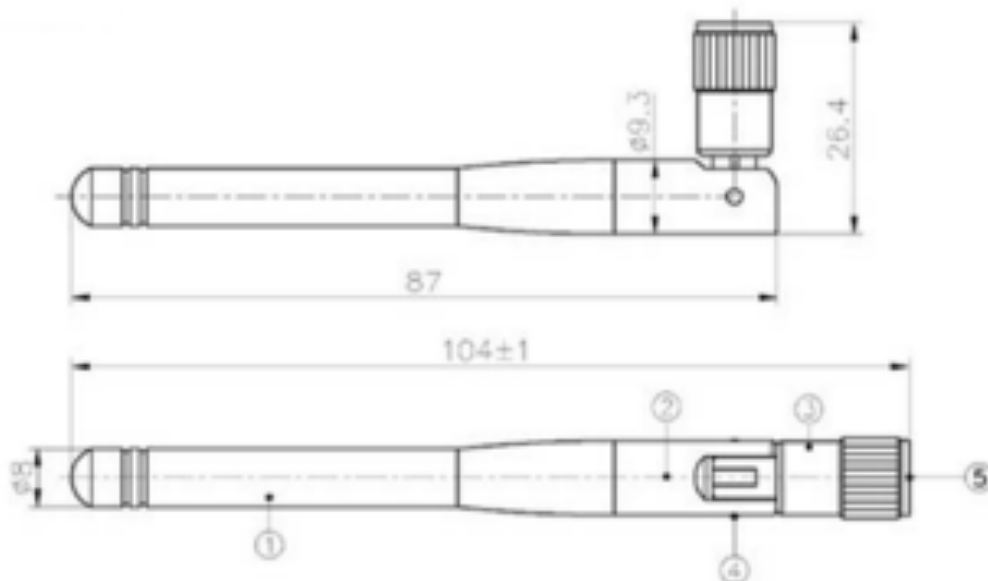

## Ordering codes

<b>TYPE</b>	<b>Description</b>	<b>Frequency (MHz)</b>
ADA-0186-868	Swivel Antenna SMA	868
ADA-0186Q	Swivel Antenna SMA	850/900/1800/1900
ADA-0186-2.4	Swivel Antenna SMA	2400
ADA-0196-868	Swivel Antenna FME	868
ADA-0196Q	Swivel Antenna FME	850/900/1800/1900
ADA-0196-2.4	Swivel Antenna FME	2400

For the latest updates, visit our Web site: [www.adactus.se](http://www.adactus.se)

### **Disclaimer**

Information furnished is believed to be accurate and reliable. However, Adactus assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Adactus reserves the right to make changes without further notice to any product herein to improve reliability, function or design. Adactus does not assume any liability arising out of the application or use of any product described herein. This publication supersedes and replaces all information previously supplied. Adactus products are not authorized as critical components in life support devices or systems.