




## High Rejection Embedded GPS Antenna

The 3961D-HR Embedded GPS Antenna provides 25 dB gain, superior out-of-band rejection performance and is the optimum choice for embedded GPS Tracking and Timing applications with high RF fields. It features a precision tuned custom ceramic patch element for maximum signal reception, 15KV ESD circuit protection, a multi-stage LNA circuit and dual high rejection SAW filters. This enables the 3961D-HR to provide a reliable and clear GPS signal while minimizing loss-of-lock, even when conditions are less than ideal. The 3961D-HR comes with a 45.2 mm diameter mini ground plane.

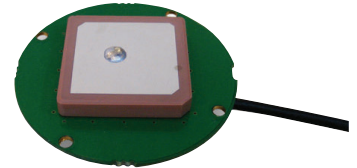

3961D-HR

### Features

- High out-of-band rejection for stand-alone or mobile applications where interference is a concern and performance is critical
- Innovative dual SAW filter design
- Low current draw: 7.5 mA @ 3.3 VDC
- Comes with internal ground plane
- 15 KV ESD circuit protection

### STANDARD CONFIGURATION

Model	Cable	Connector
3961D-HR	6" (15 cm) RG174*	MCX right angle*

### ELECTRICAL SPECIFICATIONS - GNSS ANTENNA

Frequency Range	LNA Gain	Element Gain	Polarization	Noise Figure
1575.42 ± 10 MHz	@ 3.3 VDC: 25 dB @ 5 VDC: 25.5 dB	3 dBic @ 90° -2 dBic @ 20°	Right hand circular	3.1 dB (typical)

### ELECTRICAL SPECIFICATIONS - GNSS ANTENNA, continued

Out of Band Rejection	Current Draw	DC Voltage	VSWR	Nominal Impedance
> 50 dBc @ ± 40 MHz	7.5 mA @ 3.3 VDC (typical)	2.7-5 VDC	1.5:1 maximum	50 ohms

### MECHANICAL SPECIFICATIONS

Dimensions	Weight
1.8" x 0.3" (45.2 x 7.7 mm)	0.56 oz (16 g)

### ENVIRONMENTAL SPECIFICATIONS

Temperature Range	ESD Circuit Protection	Humidity
-40°C to +85°C operating	15 KV	95% max (non condensing)

\* For other cable lengths and connector options, please refer to the GPS Mobile Antenna Parts Number Guide.