


Solid State Logic

O X F O R D • E N G L A N D

SSL CONNEX

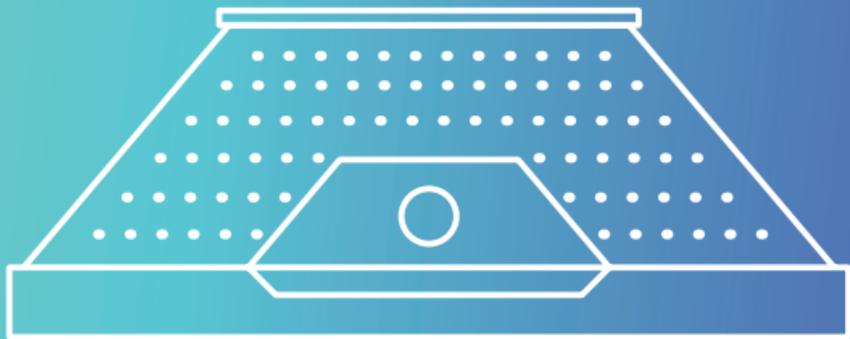

Quick Start Guide




Important
Information Inside


82BW7E01E




In The Box

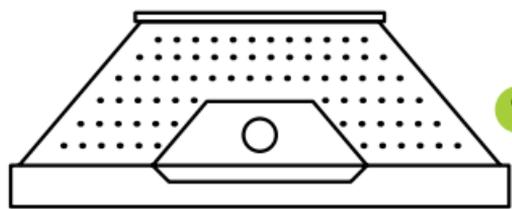

1



2



3



4

- 1 **SSL CONNEX** Unit
- 2 1/4" Thread Adapter
- 3 2 m USB C-C Cable
- 4 USB A-C Adapter
- 5 Quick Start & Safety Guide






5


Features

- Quad microphone array for recording and video conferencing applications
- Optimised signal processing modes
- Automatic smart mixer for group calls
- High quality headphone output with mic loopback option for ambient monitoring
- Touch-sensitive controls to adjust headphone level and mute the mic
- Push To Talk and Cough Switch modes
- Multichannel outputs for stereo and immersive recordings
- ¼" threaded base and thread adapter for flexible mounting options

Setting Up

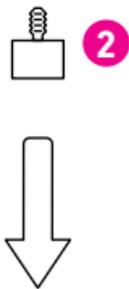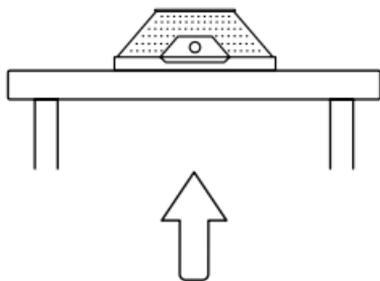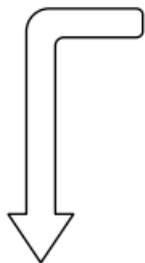


**Camera
Tripod (1/4")**

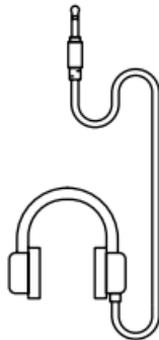

Mic Stand



USB Connection

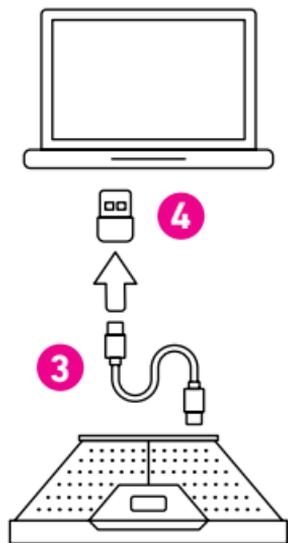

Apple OSx 10.14 (Mojave) or later. Microsoft Windows 10 or later*

User
Guide




Solo/Group Modes - Ch 1 & 2 : Dual Mono

Vocal/Music Modes - Ch 1 & 2 : Stereo

Ch 3 - 6 : Discrete mics (refer to User Guide)*

*Visit solidstatellogic.com/support for multichannel Windows drivers

Controls

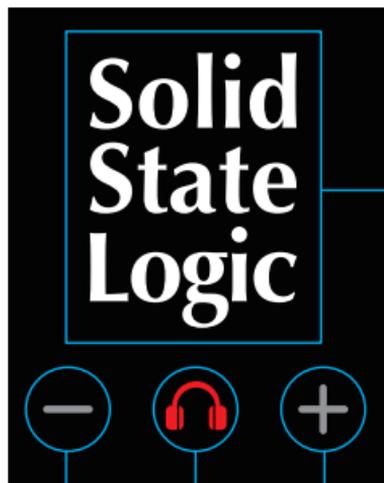

- Tap **SSL** logo to toggle mic mute
- Red = Mic muted
- **Push To Talk**
While muted, tap & hold to unmute mic temporarily
- **Cough Switch**
While unmuted, tap & hold to mute mic temporarily

Tap to adjust
headphone volume

Red = Headphones
muted (vol 0)

***Warning:**

Placing headphones near mic while loopback mode is active may cause feedback.

Settings & Audio Modes

- Hold **-** & **+** buttons for 2s to enter setup
- **SSL** logo pulses when in setup mode
- **Audio Mode**: Tap **SSL** logo to change mode. Logo colour indicates selection:
 - **Solo** (directional; e.g. conf. calls, podcasting)
 - **Group** (e.g. round table, multiple directions)
 - **Vocal** (e.g. recording singing, narration)
 - **Music** (e.g. recording loud sources)
- **Loopback mode***: Tap **-** / **+** buttons to adjust level of mic signal fed back to headphone output (Off/Low/Med/High)
- Hold **-** & **+** buttons to exit setup

Troubleshooting and FAQs

Visit the Solid State Logic Help Centre to check compatibility with your system and find answers to your questions.

www.solidstatellogic.com/support



Scan QR code on unit for full product details

www.solidstatellogic.com/SSLConnex