


LIGHT CONTROL SENSORS

Intelligent light management for optimized energy consumption.



1099651X-11



1099652X-11



1099653X-11

OFFICES

(Height max = 5 m)

ON/OFF presence sensor (for ceiling installation)

Description	Code
-------------	------

ON/OFF presence sensor for ceiling installation. A normally open channel at zero potential with a maximum manageable load of 2 kW (power factor 0.9). Circular detection area with a Ø 10 m radius, equipped with a Master function. Integrated twilight sensor. Protection rating IP20.

1099651X-11

DALI-2 presence and daylight sensor (for RECESSED installation)

Description	Code
-------------	------

Presence and brightness sensor with DALI-2 interface for recessed installation. Circular detection area with a Ø 10 m radius, equipped with a Master function. Integrated light sensor for automatic constant light regulation. Control of up to 80 DALI drivers. Protection rating IP20. Programmable/controllable remotely via IR **Remote Control** (accessory 1099654X).

1099652X-11


Accessories	Code
-------------	------

IP54 base for ceiling installations (only for DALI Sensor - Code 1099652-11).

1099653X-11

OFFICES / WAREHOUSES

(Height max = 10 m)



1099648X-11



1099649X-11



1099687X-11



1099650X-11

ON/OFF presence sensor (for ceiling installation)

Description	Code
-------------	------

ON/OFF presence sensor for ceiling installation. A normally open channel with zero potential, capable of handling a maximum load of 2 kW (power factor 0.9). Circular detection area with a diameter of 24 m, equipped with a Master function. Integrated twilight sensor. Protection degree IP20.

1099648X-11

DALI-2 presence and daylight sensor (for recessed installation)

Description	Code
-------------	------

Presence and daylight sensor with DALI-2 interface for recessed installation. Circular detection area with a diameter of 24 m, equipped with a Master function. Integrated light sensor for automatic constant light regulation. Controls up to 40 DALI drivers. Protection degree IP20. Programmable/controllable remotely via IR remote control (accessory 1099654X)

1099649X-11

CASAMBI Presence and Light Sensor (for recessed installation)

Description	Code
-------------	------

Presence and light sensor with CASAMBI interface for recessed installation. Circular detection area of Ø 24 m. Integrated light sensor for automatic constant light regulation. IP20 protection rating.

1099687X-11

Accessories	Code
-------------	------

IP54 base for ceiling installations (only for DALI Sensor - Code 1099649-11 and CASAMBI - Code 1099687X-11).

1099650X-11



1099654X



1099660X-11

Description	Code
-------------	------

IR Remote Control for system programming (only for DALI versions)

1099654X

Protection grid for sensors (for all versions)

1099660X

WAREHOUSES (max height = 16 m)



ON/OFF presence Sensor (for ceiling installation)



1099672X-11



1099673X-11



1099750X-11

Description	Code
-------------	------

ON/OFF presence sensor for ceiling installation. Features a single normally open zero-potential channel with a maximum load capacity of 2 kW (power factor 0.9). Detection area of 30x19 m, equipped with Master function. Integrated twilight sensor. Protection rating: IP20.

1099672X-11

DALI-2 Presence and Light Sensor (for ceiling installation)

Description	Code
-------------	------

Presence and light sensor with DALI-2 interface for ceiling installation. Detection area of 30x19 m, equipped with Master function. Integrated light sensor for automatic constant light regulation. Controls up to 40 DALI drivers. Protection rating: IP54. Programmable/controllable remotely via IR remote control (accessory 1099654X).




1099673X-11

CASAMBI Presence and Light Sensor (for ceiling installation)

Description	Code
-------------	------

Presence and light sensor with CASAMBI interface for surface-mounted installation. Detection area of 30 x 19 m. Integrated light sensor for automatic constant light regulation. IP54 protection rating.

1099750X-11

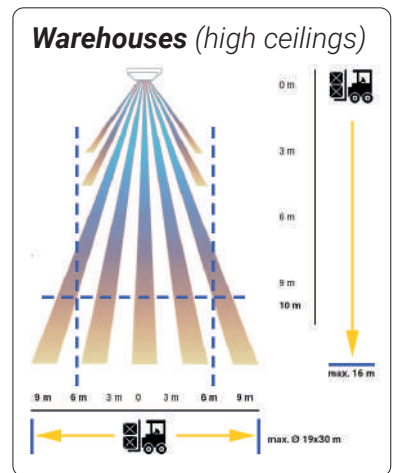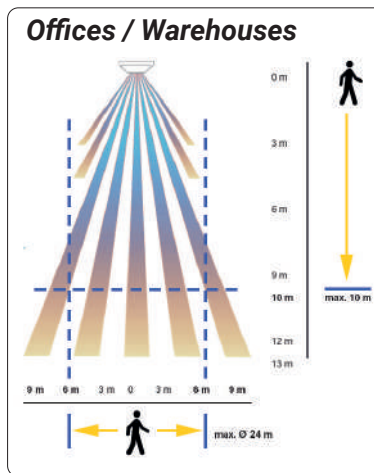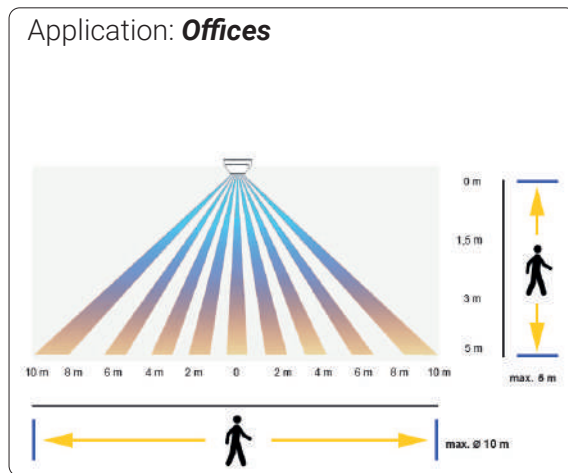

Industry

WIRING DIAGRAMS

