

Catalogue

2026



PLASSON's innovative products revolutionized the way of connecting polyethylene pipes in the 1960's. We started with fittings for agricultural irrigation and later developed solutions for urban water distribution.

Nowadays, water delivery systems in many of the world's great cities owe their excellence to PLASSON's innovative research and development.

PLASSON ensures superior designs and products, the widest range of fittings and adaptors and a genuine commitment to quality, delivery and service.

PLASSON continues to strive for the future environment. By using PLASSON products, you help us to invest in our vision of a world where clean, pure water will be everyone's birthright.

En los años sesenta PLASSON revolucionó la forma de conectar tubos de polietileno. En el principio fueron conectores para uso agrícola a partir de los cuales se desarrollaron, más tarde, productos para distribución de agua en sistemas municipales.

Hoy en día, algunas de las más grandes ciudades del mundo, deben la excelencia de sus sistemas de suministro de aguas a la investigación y desarrollo de PLASSON.

PLASSON no ha ahorrado esfuerzos para desarrollar, mediante excelente diseño, empleando los mejores materiales y con un total compromiso de calidad y servicio, la más amplia línea de conectores y adaptadores.

Nuestro compromiso con el medio ambiente es permanente. Comprando productos PLASSON, usted está ayudándonos a seguir invirtiendo en nuestra visión de un mundo donde agua limpia y pura es un derecho natural de todos.

Content

Mechanical Fittings	4 - 90
Electrofusion Fittings	92 - 165
Electrofusion Tooling	166 - 192
Series 1 Fittings	194 - 243
Silver Line Fittings	244 - 264



The Plasson logo, consisting of a red square with a white stylized 'P' icon, followed by the word 'PLASSON' in white capital letters.

PLASSON

MECHANICAL FITTINGS



Content

MECHANICAL FITTINGS

Compression Fittings for PE pipe	14-41
Conversion & Adaptor Sets from PE to Copper / UPVC / PP / Lead / Galvanised Pipe	42-47
Pipe Conversion Chart	48
Accessories for Compression Fittings	49-55
Fittings for 160mm PE Pipe	56-58
Threaded Outlet Saddles	59-61
Tapping Saddles & Valves	62-64
BSP Threaded Fittings	65-70
Valves	70-78
Quarter Turn Valves	79
Technical Specifications	80-83
Installation Instructions for Compression Fittings	84-85
Installation Instructions for Pipe Adaptors Conversion Sets	86-87
Installation Instructions for Plass4 and Copper Pipe Adaptor (Universal Adaptor)	89-90

ACCESORIOS MECÁNICOS

Accesorios Mecánicos para tuberías de PEAD	14-41
Juegos de conversión y adaptadores de PE a Cobre / PVC / PP / Plomo / Tubos galvanizados	42-47
Gráfico de conversiones para tuberías	48
Recambios y Accesorios	49-55
Accesorios para tuberías de PE 160mm	56-58
Collarines / Tomas Simples	59-61
Tomas en carga y Válvulas	62-64
Accesorios roscados (Rosca BSP)	65-70
Válvulas	70-78
Válvulas Quarter Turn	79
Detalles técnicos	80-83
Instrucciones de montaje (para accesorios de compresión)	84-85
Instrucciones de montaje (para adaptadores de tubos) Juegos de conversión	86-87
Instrucciones de montaje de Plass4 & tubo de cobre y adaptador Universal	89-90

Compression Fittings

07010 / 87010

Page 14

Coupling
Enlace recto



07610 / 87610

Page 15

Repair Coupling
Enlace recto de reparación



07110 / 87110

Page 16

Reducing Coupling
Enlace Recto Reductor



07020 / 87020

Page 17

Male Adaptor
Enlace mixto rosca macho



07720

Page 18

Male Integral Brass Thread
Enlace mixto rosca macho
de latón



07030 / 87030

Page 19

Female Adaptor
Enlace mixto rosca hembra



0703G

Page 20

Female Adaptor G
Enlace mixto rosca
hembra G



07320 / 87320

Page 20

Shouldered Adaptor
Adaptador minero



07120 / 87120

Page 21

End Plug
Tapón final



07050 / 87050

Page 22

90° Elbow
Codo de 90°



07510

Page 22

90° Reducing Elbow
Codo de 90° reductor



07850 / 87850

Page 23

90° Elbow with Threaded
Male Offtake
Codo de 90° compresión
rosca macho



07770

Page 24

90° Elbow with Male
Integral Brass
Codo de 90° con macho
integral de latón



07150 / 87150

Page 25

90° Elbow with Threaded
Female Offtake
Codo de 90° compresión
rosca hembra



07060 / 87060

Page 26

45° Elbow
Codo de 45°



07450

Page 26

45° Elbow with Threaded
Male Offtake
Codo de 45° compresión
rosca macho



07350

Page 27

90° Elbow Adaptor
Codo espiga



07750

Page 27

Wall Plate Elbow
Codo de aplicación mural



07040 / 87040

Page 28

90° Tee
Te de 90°



0704P

Page 29

90° Slip Tee
Te de 90° de reparación



07740

Page 29

90° Enlarging Tee
Te de 90° alargado



07340 / 87340

Page 30

90° Reducing Tee
Te de 90° reductor



07840

Page 31

90° Tee with Threaded
Male Offtake
Te de 90° compresión
rosca macho



0714S0

Page 31

90° Reducing Tee with
Threaded Female Offtake
Te de 90° reducción
compresión rosca hembra



07140 / 87140

Page 32

90° Tee with Threaded
Female Offtake
Te de 90° compresión
rosca hembra



0714P0

Page 33

90° Slip Tee with Threaded
Female Offtake
Te de 90° rosca hembra
de reparación



07810 / 87810

Page 33

Coupling with Riser
Enlace recto con
derivación rosca macho



07640 / 87640

Page 34

45° Tee
Te de 45°



07220 / 87220

Page 35

Compression Flange
Adaptor (with metal flange)
Adaptador compresión-
brida (con brida de metal)



072306 / 872306

Page 36

Flange Adaptor (with
metal flange)
Adaptador espiga-brida
(con brida de metal)



07006

Page 37

Metal Flange
Brida de metal



07250

Page 38

Threaded Adaptor
Adaptador compresión
rosca macho



07270

Page 39

Brass Threaded Adaptor
Adaptador rosca de latón



070170

Page 40

Plass4 (Universal) Coupling
Plass4 Enlace (universal)



070570

Page 40

Plass4 (Universal)
90° Elbow
Plass4 - Codo de 90°
(universal)



07550

Page 41

Y-fitting with Threaded
Male Offtake
Y compresión rosca macho



07540

Page 41

Cross with Threaded
Female Offtake
Cruz compresión rosca
hembra



Conversion & Adaptor Sets

071209

Page 42

Plug Adaptor
Tapón ciego



07950

Page 42

Pipe Liner for PE
SDR 11 Pipe
Refuerzo de tubos



07896

Page 43

Adaptor for Copper and
Imperial UPVC
Adaptador para cobre y UPVC



07930 / 87930

Page 43-44

Reducing Set
Juego reductor



07940

Page 44

Modular Adaptor
Adaptador modular



0701C0

Page 44

Copper Pipe Adaptor
Adaptador para
tubo de cobre



07970

Page 45

Grip Ring for UPVC
and PP Pipe
Casquillo de apriete para
tubos de UPVC y PP



07438

Page 45

Conversion Set for
Copper Pipe
Juego adaptador para
tubos de cobre



0701QQ

Page 46

Coupling for PVC Pipe
Enlace recto para
tubo de PVC



077802

Page 46

Conversion Set for
Lead Pipe
Juego adaptador para
tubos de plomo



078908

Page 47

Converter Rubber Adaptor
for Galvanised Pipe
Conversor de goma para
tubos de acero galvanizado



078907

Page 47

Conversion Set Adaptor for
Galvanised Pipe
Juego de conversion para
tubos de acero galvanizado



Accessories

07004 / 87004

Page 49

Nut
Racor



07002

Page 50

O - Ring NBR
Junta tórica (NBR)



070029

Page 51

Seal - NBR
Sello de NBR



87910

Page 52

Seal - EPDM
Sello de EPDM



07003

Page 52

Split Ring - Polyacetal
Casquillo de apriete (acetal)



87003

Page 53

Split Ring - Polyacetal
Casquillo de apriete (acetal)



07003

Page 53

Split Ring - CPVC
Casquilla de apriete (CPVC)



87003V

Page 54

Split Ring - CPVC
Casquilla de apriete (CPVC)



07005 / 87005

Page 54

Insert
Inserto de PP



18960

Page 55

Chamfer Tool for PE Pipes
Herramienta para biselar



07960

Page 55

Chamfer Tool for PE Pipes
Herramienta para biselar



07990

Page 55

PLASSON Wrench
Llave PLASSON



Fittings for 160mm Pipes

070106

Page 56

Coupling
Enlace recto



070406

Page 56

90° Tee
Te de 90°



070506

Page 57

90° Elbow
Codo de 90°



072206

Page 57

Compression Flange
Adaptor (with metal flange)
Adaptador compresión-
brida (con brida de metal)



072306

Page 57

Flange Adaptor (with metal
flange)
Adaptador brida
(con brida de metal)



073206

Page 58

Shouldered Adaptor
Adaptador minero



07006

Page 58

Half Metal Flange
Brida de metal



Threaded Outlet Saddles

16076

Page 59

Saddle Single Outlet with
Reinforcing Ring
Collarin simple con
anillo de refuerzo



16176

Page 60

Saddle Double Outlet with
Reinforcing Ring Options
Collarin doble con
anillo de refuerzo



16005

Page 61

Plated Nut & Bolt for Saddles
Tornillo y tuerca de acero
niquelado para collarin



Tapping Saddles & Valves

18680

Page 61

Mechanical Tapping Valve
Valvula Mecanica con salida
rotatoria Tapper®



16300

Page 63

PLASSADDLE Threaded



16310

Page 64

PLASSADDLE Tapper



1631R

Page 64

PLASSADDLE Tapper Male



BSP Threaded Fittings

050107

Page 65

Threaded Socket
Manguito rosca
hembra x hembra



050207

Page 65

Threaded Reducing Bushing
Manguito reductor
hembra x macho



050407

Page 66

90° Threaded Tee
Te de 90° rosca hembra



050507

Page 66

90° Threaded Elbow
Codo de 90° rosca hembra



051507

Page 67

90° Threaded Elbow
Male x Female
Codo roscado-macho
x hembra



050605

Page 67

Threaded Reducing Nipple
Machón doble reductor



050607

Page 68

Threaded Nipple
Machón doble



050707

Page 68

Threaded Cap
Machón doble



051107

Page 69

Threaded Reducing Socket
Manguito reductor rosca
hembra - hembra



051607

Page 69

Threaded Riser
Espiga rosca



051707

Page 70

Threaded Plug
Tapón rosca macho



Valves

03703

Page 70

Ball Valve
Válvula esférica



0370302

Page 71

PA Ball Valve Female x Male



03405

Page 71

Threaded Stoptap
(Seal NBR)
Válvula de línea rosca
hembra (juntas NBR)



03407

Page 71

Compression Stoptap
(Seal NBR)
Válvula de línea
compresión (juntas NBR)



03048 / 03948

Page 72

Angle Seat Valve (Seal NBR)
Threaded x Compression
Válvula de asiento angular
compresión - rosca
macho - juntas NBR



03047

Page 72

Angle Seat Valve (seal NBR),
Threaded Inlet & Outlet
Válvula de asiento angular
(sello NBR), roscas macho



03049

Page 73

Angle Seat Valve (seal FPM),
Threaded Inlet & Outlet
Válvula de asiento angular
(sello FPM), roscas macho



03046

Page 73

Angle Seat Valve (Seal NBR)
Compression Inlet & Outlet
Válvula de asiento angular,
(sello NBR) compresión



03067 / 03068

Page 74

Check Valve (Seal EPDM)
Threaded Inlet & Outlet
Válvula antirretorno, (sello
EPDM) roscas macho



03801

Page 74

Fix Ratio Pressure
Reducing Valve



0220

Page 74

Universal Pressure
Regulator UPR 550



03039

Page 75

Quick Coupling Valve
(Seal NBR)
Válvula de acople
rápido (juntas NBR)



03139

Page 75

Key for Quick Coupling
Valve 3039
Conexión de acople rápido



03226 / 03227

Page 75

Check Valve Insert
Valvula de control



03589

Page 76

Male Rc thread to G
threaded Free Nut



03510T

Page 76

Water Meter Seat



035100

Page 77

Water Meter Manifold
Soporte para control
de flujo de agua



036010

Page 77

PP Ball Valve
PP Válvula de esfera



036020

Page 78

PP Ball Valve Male Adaptor
PP Válvula de esfera
rosca macho



036030

Page 78

PP Ball Valve Female
Adaptor PP Válvula de
esfera rosca hembra



Quarter Turn Valves

03010

Page 79

Quarter Turn Valve Male
Threaded x Compression
Rosca Macho/ Compresión



03012

Page 79

Quarter Turn Valve
Male Threaded
x Female Threaded
Rosca Macho/Rosca Hembra



03017

Page 79


Quarter Turn Valve
Compression x Compression
Compresión



Coupling


07010

Enlace recto

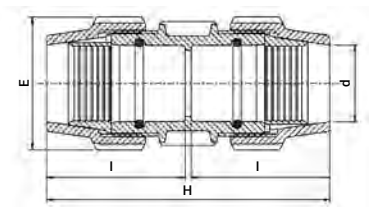

Product Code	Size d x d	E	H	I	UB	UC	W
070106016	16 x 16	39	105	50	10	400	52
070100020	20 x 20	48	122	59	10	200	93
070100025	25 x 25	54	126	61	10	180	116
070100032	32 x 32	64	145	71	5	100	181
070100040	40 x 40	82	177	87	—	75	310
070100050	50 x 50	96	201	98	—	45	457
070100063	63 x 63	113	230	113	—	30	741
070100125	125 x 125	212	460	225	—	3	5347

87010

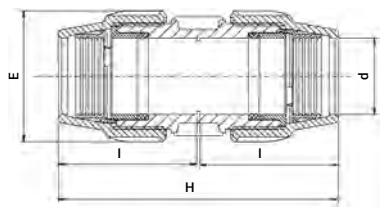


Product Code	Size d x d	E	H	I	UB	UC	W
870100075	75 x 75	132	289	143	—	16	1246
870100090	90 x 90	152	334	164	—	9	1893
870100110	110 x 110	181	398	196	—	5	3321

Repair Coupling


07610

Enlace recto de reparación

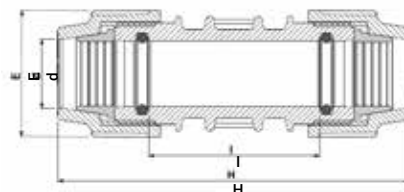

Product Code	Size d x d	E	H	I	UB	UC	W
076100020	20 x 20	48	122	78	10	240	141
076100025	25 x 25	54	136	90	10	150	119
076100032	32 x 32	64	174	120	5	80	202
076100040	40 x 40	82	215	148	—	55	360
076100050	50 x 50	96	244	158	—	30	536
076100063	63 x 63	113	270	170	—	24	836
076100125	125 x 125	212	460	265	—	3	5318

87610

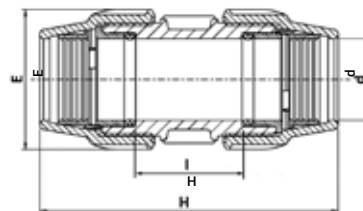


Product Code	Size d x d	E	H	I	UB	UC	W
876100075	75 x 75	132	289	101	—	16	1210
876100090	90 x 90	152	334	57	—	8	1890
876100110	110 x 110	181	398	83	—	5	3260

Reducing Coupling


07110

Enlace Recto Reductor

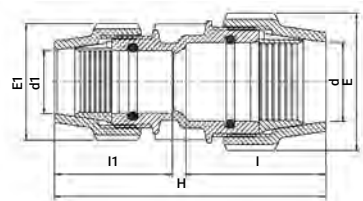

Product Code	Size d x d1	E	E1	H	I	I1	UB	UC	W
071100020016	20 x 16	48	39	111	57	50	10	300	74
071100025016	25 x 16	54	39	113	58	50	10	220	88
071100025020	25 x 20	54	48	119	58	57	10	200	100
071100032020	32 x 20	64	48	140	67	57	5	150	142
071100032025	32 x 25	64	54	133	67	58	5	120	143
071100040025	40 x 25	82	54	156	84	58	—	90	219
071100040032	40 x 32	82	64	156	84	67	—	90	245
071100050025	50 x 25	96	54	176	93	58	—	70	305
071100050032	50 x 32	96	64	175	98	62	—	70	332
071100050040	50 x 40	96	82	184	93	84	—	60	381
071100063025	63 x 25	113	54	193	110	58	—	50	461
071100063032	63 x 32	113	64	197	110	62	—	45	486
071100063040	63 x 40	113	82	208	110	82	—	40	546
071100063050	63 x 50	113	96	214	110	93	—	36	574

87110




Product Code	Size d x d1	E	E1	H	I	I1	UB	UC	W
871100075050	75 x 50	132	96	250	137	98	—	22	920
871100075063	75 x 63	132	113	257	137	112	—	18	964
871100090063	90 x 63	152	113	291	169	115	—	12	1397
871100090075	90 x 75	152	132	316	169	139	—	10	1663
871100110090	110 x 90	181	152	380	196	161	—	6	2719

Male Adaptor


07020

Enlace mixto rosca macho

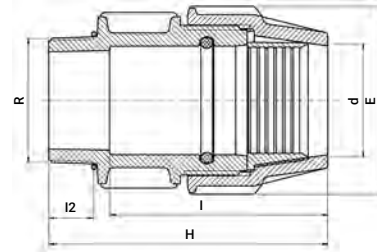

Product Code	Size d x R	E	H	I	I2	UB	UC	W
0702060160030A	16 x 3/8"	39	76	59	13	10	600	33
070206016005	16 x 1/2"	39	79	59	16	10	500	34
070206016007	16 x 3/4"	39	79	59	17	10	500	35
070200020005	20 x 1/2"	48	92	71	17	10	350	58
070200020007	20 x 3/4"	48	92	71	18	10	350	59
070200020010	20 x 1"	48	86	52	20	10	350	60
070200025005	25 x 1/2"	54	94	72	17	10	250	68
070200025007	25 x 3/4"	54	95	72	18	10	250	73
070200025010	25 x 1"	54	97	72	20	10	250	79
070200032007	32 x 3/4"	64	106	83	18	5	150	113
070200032010	32 x 1"	64	107	83	20	5	150	122
070200032013	32 x 1 1/4"	64	110	83	22	5	150	114
070200032015	32 x 1 1/2"	64	110	83	22	5	140	127
070200040010	40 x 1"	82	118	91	20	—	110	184
070200040013	40 x 1 1/4"	82	117	90	22	—	110	185
070200040015	40 x 1 1/2"	82	117	90	22	—	100	185
070200040020	40 x 2"	82	123	91	26	—	100	208
070200050010	50 x 1"	96	133	106	20	—	70	266
070200050013	50 x 1 1/4"	96	136	106	22	—	70	266
070200050015	50 x 1 1/2"	96	136	109	22	—	70	277
070200050020	50 x 2"	96	140	109	26	—	65	284
070200063013	63 x 1 1/4"	113	154	123	22	—	48	443
070200063015	63 x 1 1/2"	113	154	123	22	—	48	451
070200063020	63 x 2"	113	167	123	26	—	48	461
070200063025	63 x 2 1/2"	113	160	123	29	—	45	459

87020

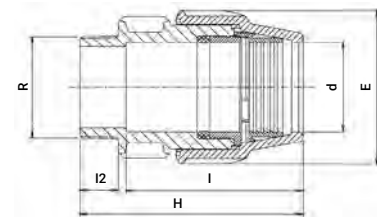


Product Code	Size d x R	E	H	I	I2	UB	UC	W
870200075020	75 x 2"	132	189	156	26	—	28	737
870200075025	75 x 2 1/2"	132	192	156	29	—	28	752
870200075030	75 x 3"	132	196	156	33	—	25	751
870200090020	90 x 2"	152	226	169	26	—	16	1103
870200090025	90 x 2 1/2"	152	229	169	29	—	16	1097
870200090030	90 x 3"	152	232	169	33	—	16	1090
870200090040	90 x 4"	152	238	169	38	—	12	1133
870200110020	110 x 2"	181	263	215	26	—	8	1933
870200110030	110 x 3"	181	259	215	33	—	8	1933
870200110040	110 x 4"	181	267	215	42	—	8	1944

Male Integral Brass Thread

07720

Enlace mixto rosca macho de laton

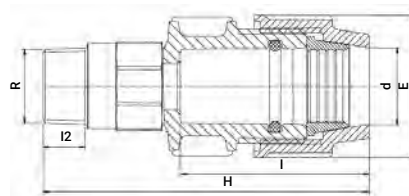


Product Code	Size d x R	E	H	I	I2	UB	UC	W
077200032007	32 x 3/4"	64	139	83	18	1	100	240
077200032010	32 x 1"	64	141	83	20	1	100	276
077200032013	32 x 1 1/4"	64	142	83	22	1	75	300
077200032015	32 x 1 1/2"	64	142	83	22	1	75	330
077200040007	40 x 3/4"	82	149	91	18	1	55	413
077200040010	40 x 1"	82	151	91	20	1	60	413
077200040013	40 x 1 1/4"	82	154	91	22	1	59	428
077200040015	40 x 1 1/2"	82	153	91	22	1	55	428
077200050010	50 x 1"	96	169	106	20	1	45	539
077200050013	50 x 1 1/4"	96	172	106	22	1	45	563
077200050015	50 x 1 1/2"	96	172	106	22	1	43	586
077200063013	63 x 1 1/4"	113	190	123	22	1	30	842
077200063015	63 x 1 1/2"	113	190	123	22	1	30	874
077200063020	63 x 2"	113	194	123	26	1	30	855

Female Adaptor


07030

Enlace mixto rosca hembra



Product Code	Size d x Rp	E	H	I	I2	UB	UC	W
070306016005	16 x 1/2"	39	73	52	19	10	500	36
070306016007	16 x 3/4"	39	75	53	19	10	500	36
070300020005	20 x 1/2"	48	82	60	19	10	350	60
070300020007	20 x 3/4"	48	82	60	19	10	350	58
070300020010	20 x 1"	48	92	57	21	10	300	68
070300025007	25 x 3/4"	54	88	63	21	10	250	83
070300025010	25 x 1"	54	88	63	21	10	250	78
070300032007	32 x 3/4"	64	94	73	19	5	150	107
070300032010	32 x 1"	64	94	69	21	5	150	115
070300032013	32 x 1 1/4"	64	96	67	25	5	140	140
070300040010	40 x 1"	82	112	84	21	—	110	178
070300040013	40 x 1 1/4"	82	114	84	25	—	110	202
070300040015	40 x 1 1/2"	82	114	84	25	—	100	225
070300050013	50 x 1 1/4"	96	123	93	25	—	75	276
070300050015	50 x 1 1/2"	96	123	93	25	—	70	277
070300050020	50 x 2"	96	128	93	30	—	70	294
070300063013	63 x 1 1/4"	113	139	110	25	—	48	417
070300063015	63 x 1 1/2"	113	139	110	25	—	48	438
070300063020	63 x 2"	113	148	110	30	—	48	443

87030




Product Code	Size d x Rp/Rc	E	H	I	I2	UB	UC	W
870300075020	75 x 2"	132	181	137	30	—	27	692
870300075025	75 x 2 1/2"	132	175	137	33	—	27	730
870300090020	90 x 2"	152	212	182	30	—	14	1130
870300090030	90 x 3"	152	222	182	40	—	14	1183
870300090040	90 x 4"	152	242	182	50	—	12	1518
870300110030	110 x 3"	181	263	215	42	—	8	2007
870300110040	110 x 4"	181	273	215	52	—	8	2136

Female Adaptor G

0703G0*

Enlace mixto rosca hembra G




Product Code	Size d x G	E	H	I	I2	UB	UC	W
0703G0025007	25 x 3/4"	54	88	63	12	10	250	83
0703G0025010	25 x 1"	54	88	63	14	10	250	78
0703G0032010	32 x 1"	64	89	72	14	5	150	115

* For connecting parallel male thread | * Para conectar rosca macho paralelo

Shouldered Adaptor


07320

Adaptador minero



Product Code	Size d x DN (inch)	E	I	L	H	B	UB	UC	W
073200050020	50 x 50 (2")	96	109	16	138	67	—	65	293
073200063020	63 x 50 (2")	113	123	16	156	67	—	45	437

87320

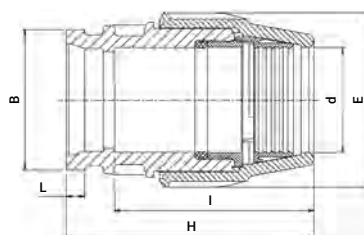


Product Code	Size d x DN (inch)	E	I	L	H	B	UB	UC	W
873200090040	90 x 100 (4")	152	169	16	230	123	—	400	1249
873200110040	110 x 100 (4")	181	215	16	257	123	—	450	1968

End Plug


07120

Tapón final



Product Code	Size d	E	H	I	UB	UC	W
071200020	20	48	79	74	10	350	57
071200025	25	54	82	77	10	250	72
071200032	32	64	92	87	5	180	108
071200040	40	82	102	97	—	110	186
071200050	50	96	121	114	—	75	270
071200063	63	113	145	122	—	45	448

87120




Product Code	Size d	E	H	I	UB	UC	W
871200075	75	132	177	161	—	28	740
871200090	90	152	211	169	—	16	1082
871200110	110	181	234	221	—	10	1924

90° Elbow

07050


Codo de 90°



Product Code	Size d x d	E	I	A	UB	UC	W
070506016*	16 x 16	39	50	63	10	350	57
070500020	20 x 20	48	56	73	10	200	95
070500025	25 x 25	54	58	79	10	150	122
070500032	32 x 32	64	67	93	5	100	187
070500040	40 x 40	82	82	108	—	60	341
070500050	50 x 50	96	93	127	—	35	497
070500063	63 x 63	113	110	151	—	24	838

* Only available in black

87050




Product Code	Size d x d	E	I	A	UB	UC	W
870500075	75 x 75	132	137	184	—	12	1362
870500090	90 x 90	152	161	216	—	8	2171
870500110	110 x 110	181	196	294	—	4	4005

90° Reducing Elbow

07510

Codo de 90° reductor




Product Code	Size d x d1	E	E1	I	I1	A	A1	UB	UC	W
075100025020	25 x 20	54	48	58	57	90	75	10	180	114

90° Elbow with Threaded Male Offtake

07850

Codo de 90° compresión rosca macho




Product Code	Size d x R	E	I	I2	A	A1	UB	UC	W
078500020005	20 x 1/2"	48	57	17	74	41	10	350	55
078500020007	20 x 3/4"	48	57	18	76	43	10	300	64
078500025005	25 x 1/2"	54	58	17	85	47	10	240	70
078500025007	25 x 3/4"	54	58	18	90	48	10	250	79
078500025010	25 x 1"	54	58	20	90	54	10	240	84
078500032007	32 x 3/4"	64	67	18	104	55	5	140	116
078500032010	32 x 1"	64	67	20	104	55	5	140	128
078500032013	32 x 1 1/4"	64	67	22	104	58	5	140	135
078500040010	40 x 1"	82	84	20	124	60	—	90	196
078500040013	40 x 1 1/4"	82	84	22	124	66	—	90	205
078500040015	40 x 1 1/2"	82	84	22	124	66	—	80	220
078500050010	50 x 1"	96	93	20	140	71	—	55	294
078500050013	50 x 1 1/4"	96	93	22	144	74	—	55	335
078500050015	50 x 1 1/2"	96	93	22	144	74	—	55	321
078500050020	50 x 2"	96	93	26	144	76	—	55	373
078500063013	63 x 1 1/4"	113	110	22	168	76	—	35	451
078500063015	63 x 1 1/2"	113	110	22	168	76	—	35	468
078500063020	63 x 2"	113	110	26	170	92	—	35	518

ELECTROFUSION FITTINGS

TOOLING

87850

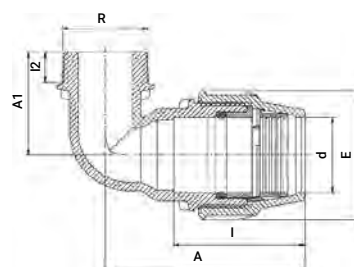

Product Code	Size d x R	E	I	I2	A	A1	UB	UC	W
878500075025	75 x 2 1/2"	132	137	30	207	105	—	24	872
878500075030	75 x 3"	132	137	33	207	110	—	40	934
878500090030	90 x 3"	152	164	33	232	110	—	15	1356
878500110040	110 x 4"	181	196	42	276	140	—	100	2324


SERIES 1

SILVER LINE

90° Elbow with Male Integral Brass

07770

Code de 90° con macho integral de latón




Product Code	Size d x R	E	I	I2	A	A1	UB	UC	W
077700032007	32 x 3/4"	64	67	18	104	79	1	75	270
077700032010	32 x 1"	64	67	20	104	81	1	70	286
077700032013	32 x 1 1/4"	64	67	22	104	82	1	70	343
077700032015	32 x 1 1/2"	64	67	22	104	82	1	70	360
077700040007	40 x 3/4"	82	84	18	124	86	1	55	435
077700040010	40 x 1"	82	84	20	124	88	1	55	435
077700040013	40 x 1 1/4"	82	84	22	124	90	1	55	450
077700040015	40 x 1 1/2"	82	84	22	124	89	1	55	460
077700050010	50 x 1"	96	93	20	144	94	1	40	592
077700050013	50 x 1 1/4"	96	93	22	144	97	1	40	613
077700050015	50 x 1 1/2"	96	93	22	144	97	1	40	613
077700063013	63 x 1 1/4"	113	110	22	168	126	1	27	895
077700063015	63 x 1 1/2"	113	110	22	168	126	1	27	955
077700063020	63 x 2"	113	110	26	170	129	1	25	987

90° Elbow with Threaded Female Offtake

07150

Codo de 90° compresión rosca hembra




Product Code	Size d x Rp	E	I	I2	A	A1	UB	UC	W
071506016005	16 x 1/2"	39	50	19	66	39	10	500	38
071500020005	20 x 1/2"	48	54	19	78	40	10	350	61
071500020007	20 x 3/4"	48	57	19	78	44	10	300	71
071500025005	25 x 1/2"	54	58	18	81	46	10	250	86
071500025007	25 x 3/4"	54	58	19	81	46	10	250	81
071500025010	25 x 1"	54	58	21	83	50	10	220	90
071500032007	32 x 3/4"	64	67	18	95	54	5	150	143
071500032010	32 x 1"	64	67	21	95	54	5	150	136
071500032013	32 x 1 1/4"	64	67	25	99	60	5	120	167
071500040010	40 x 1"	82	84	21	119	52	—	100	201
071500040013	40 x 1 1/4"	82	84	25	119	62	—	90	246
071500040015	40 x 1 1/2"	82	84	25	119	62	—	80	261
071500040020	40 x 2"	82	84	30	119	75	—	65	293
071500050010	50 x 1"	96	93	21	133	57	—	70	281
071500050013	50 x 1 1/4"	96	93	25	133	67	—	60	313
071500050015	50 x 1 1/2"	96	93	25	135	66	—	60	344
071500050020	50 x 2"	96	93	30	138	85	—	45	387
071500063013	63 x 1 1/4"	113	110	25	162	65	—	35	488
071500063015	63 x 1 1/2"	113	110	25	162	69	—	35	504
071500063020	63 x 2"	113	110	30	160	90	—	35	559

ELECTROFUSION FITTINGS

TOOLING

87150



Product Code	Size d x Rp	E	I	I2	A	A1	UB	UC	W
871500075020	75 x 2"	132	137	30	193	100	—	20	860
871500075025	75 x 2 1/2"	132	137	36	196	105	—	18	933
871500075030	75 x 3"	132	137	36	196	105	—	18	982


SERIES 1

SILVER LINE

45° Elbow


07060

Codo de 45°



Product Code	Size d x d	E	I	A	UB	UC	W
070600032	32 x 32	64	67	92	5	100	189
070600040	40 x 40	82	84	99	—	60	330
070600050	50 x 50	96	93	110	—	40	476
070600063	63 x 63	113	110	130	—	24	772

87060




Product Code	Size d x d	E	I	A	UB	UC	W
870600075	75 x 75	132	137	159	—	12	1265
870600090	90 x 90	152	164	194	—	8	2040
870600110	110 x 110	181	196	237	—	4	3558

45° Elbow with Threaded Male Offtake

07450

Codo de 45° compresión rosca macho

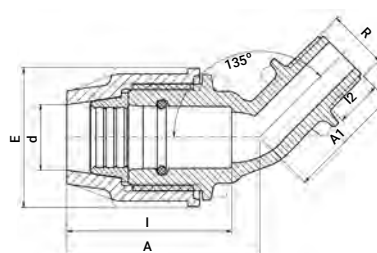


Product Code	Size d x R	E	I	I2	A	A1	UB	UC	W
074500020005	20 x 1/2"	48	57	17	64	40	10	350	54
074500020007	20 x 3/4"	48	57	18	64	41	10	350	55

90° Elbow Adaptor

07350

Codo espiga




Product Code	Size d x d1	E	I	A	A1	UB	UC	W
073500040040	40 x 40	82	84	118	106	—	80	314
073500040050	40 x 50	82	84	118	120	—	70	275
073500050040	50 x 40	96	93	136	106	—	60	308
073500050050	50 x 50	96	93	136	120	—	55	356
073500063040	63 x 40	113	110	161	106	—	40	450
073500063050	63 x 50	113	110	161	120	—	35	511

Wall Plate Elbow

07750

Codo de aplicación mural




Product Code	Size d x Rp	E	H	I	I2	A	A1	A2	UB	UC	W
077500016005	16 x 1/2"	39	110	50	18	76	40	38	1	150	98
077500020005	20 x 1/2"	48	110	57	18	78	40	38	1	150	92
0775060250050A	25 x 1/2"	53	117	55	19	78	40	38	—	—	—
077500025007	25 x 3/4"	54	120	58	19	81	40	38	1	100	115

90° Tee


07040

Te de 90°



Product Code	Size d x d x d	E	H	I	A	UB	UC	W
070406016	16 x 16 x 16	39	126	50	63	10	220	83
070400020	20 x 20 x 20	48	145	56	73	10	120	141
070400025	25 x 25 x 25	54	156	58	78	5	100	173
070400032	32 x 32 x 32	64	185	67	93	5	60	285
070400040	40 x 40 x 40	82	221	86	111	—	40	501
070400050	50 x 50 x 50	96	252	95	126	—	25	741
070400063	63 x 63 x 63	113	294	110	146	—	16	1215

87040




Product Code	Size d x d x d	E	H	I	A	UB	UC	W
870400075	75 x 75 x 75	132	364	137	182	—	8	1947
870400090	90 x 90 x 90	152	438	164	219	—	5	3235
870400110	110 x 110 x 110	181	583	196	294	—	2	5880

90° Slip Tee

0704P0

Te de 90° de reparación

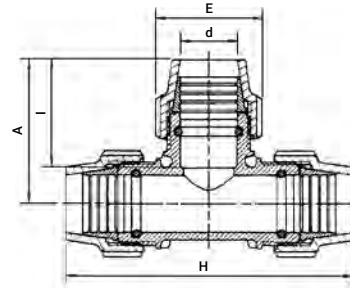


Product Code	Size d x d x d	E	H	I	A	UB	UC	W
0704P0020	20 x 20 x 20	48	145	56	73	10	120	133
0704P0025	25 x 25 x 25	54	156	58	78	5	100	173
0704P0032	32 x 32 x 32	64	185	67	93	5	60	280
0704P0040	40 x 40 x 40	82	221	86	111	—	40	489
0704P0050	50 x 50 x 50	96	252	95	126	—	25	720
0704P0063	63 x 63 x 63	113	294	110	146	—	16	1107

90° Enlarging Tee

07740

Te de alargado

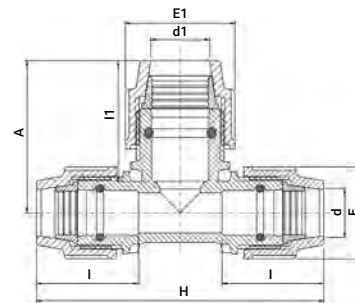


Product Code	Size d x d1 x d	E	E1	H	I	I1	A	UB	UC	W
077400025032	25 x 32 x 25	54	64	156	58	69	87	5	80	220

90° Reducing Tee


07340

Te de 90° reductor



Product Code	Size d x d1 x d	E	E1	H	I	I1	A	UB	UC	W
073400020016	20 x 16 x 20	48	39	137	57	50	70	10	150	125
073400025020	25 x 20 x 25	54	48	150	58	57	74	5	100	166
073400032025	32 x 25 x 32	64	54	173	67	58	83	5	70	256
073400040025	40 x 25 x 40	82	54	205	84	58	84	—	45	412
073400040032	40 x 32 x 40	82	64	207	82	67	97	—	40	428
073400050025	50 x 25 x 50	96	54	228	93	76	105	—	30	550
073400050032	50 x 32 x 50	96	64	230	93	67	117	—	30	590
073400050040	50 x 40 x 50	96	82	236	93	82	114	—	30	647
073400063032	63 x 32 x 63	113	64	268	113	62	118	—	20	892
073400063040	63 x 40 x 63	113	82	268	113	84	139	—	20	962
073400063050	63 x 50 x 63	113	96	275	110	93	132	—	18	1021

87340




Product Code	Size d x d1 x d	E	E1	H	I	I1	A	UB	UC	W
873400075063	75 x 63 x 75	132	113	364	137	109	153	—	350	1661

90° Tee with Threaded Male Offtake

07840

Te de 90° compresión rosca macho

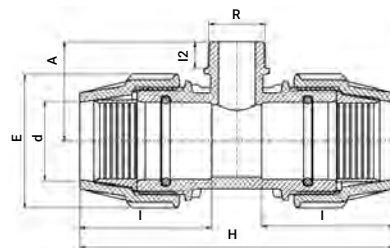


Product Code	Size d x R x d	E	H	I	I2	A	UB	UC	W
078400020005	20 x 1/2" x 20	48	138	56	17	46	10	180	105
078400020007	20 x 3/4" x 20	48	144	56	18	46	10	180	108
078400025005	25 x 1/2" x 25	54	146	58	17	48	5	140	134
078400025007	25 x 3/4" x 25	54	146	58	18	50	5	140	137
078400032010	32 x 1" x 32	64	170	67	20	58	5	80	218
078400040013	40 x 1 1/4" x 40	82	205	84	22	71	—	50	373
078400040015	40 x 1 1/2" x 40	82	205	84	22	71	—	50	376
078400050013	50 x 1 1/4" x 50	96	230	93	22	77	—	36	511
078400050015	50 x 1 1/2" x 50	96	230	93	22	77	—	36	523
078400050020	50 x 2" x 50	96	230	93	26	82	—	36	523
078400063013	63 x 1 1/4" x 63	113	268	113	22	79	—	20	821
078400063015	63 x 1 1/2" x 63	113	268	113	22	83	—	20	828
078400063020	63 x 2" x 63	113	272	110	26	92	—	20	877

90° Reducing Tee with Threaded Female Offtake

0714S0

Te de 90° reducción compresión rosca hembra

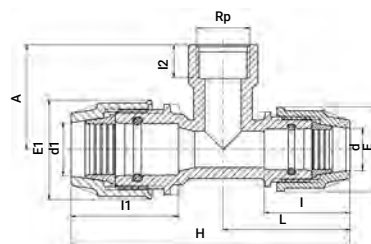


Product Code	Size d x Rp x d1	E	E1	H	L	I	I1	I2	A	UB	UC	W
0714S0020016	20 x 3/4" x 16	48	39	132	69	52	50	19	42	10	180	86
0714S0025020	25 x 3/4" x 20	54	48	139	70	53	52	22	42	5	140	145
0714S0032025	32 x 1" x 25	64	54	169	91	67	58	22	58	5	80	176

90° Tee with Threaded Female Offtake


07140

Te de 90° compresión rosca hembra

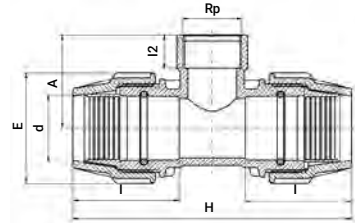

Product Code	Size d x Rp x d	E	H	I	I2	A	UB	UC	W
071406016005	16 x 1/2" x 16	39	122	50	17	42	10	240	66
071406016007	16 x 3/4" x 16	39	122	50	19	41	10	240	65
071400020005	20 x 1/2" x 20	48	144	56	18	42	10	180	104
071400020007	20 x 3/4" x 20	48	144	56	19	45	10	180	110
071400025005	25 x 1/2" x 25	54	151	58	18	45	5	140	131
071400025007	25 x 3/4" x 25	54	151	58	19	48	5	140	140
071400025010	25 x 1" x 25	54	158	58	21	53	5	100	140
071400025013	25 x 1 1/4" x 25	54	158	58	25	64	5	80	194
071400032007	32 x 3/4" x 32	64	177	67	19	51	5	80	210
071400032010	32 x 1" x 32	64	177	67	21	54	5	80	213
071400032013	32 x 1 1/4" x 32	64	182	67	25	65	5	60	253
071400032015	32 x 1 1/2" x 32	64	182	67	25	71	5	60	268
071400040010	40 x 1" x 40	82	203	84	21	61	—	60	357
071400040013	40 x 1 1/4" x 40	82	217	84	24	70	—	55	403
071400040015	40 x 1 1/2" x 40	82	217	84	25	70	—	50	413
071400040020	40 x 2" x 40	82	217	84	30	78	—	45	435
071400050015	50 x 1 1/2" x 50	96	244	93	25	76	—	36	575
071400050020	50 x 2" x 50	96	244	93	30	80	—	30	590
071400063013	63 x 1 1/4" x 63	113	268	113	27	95	—	20	886
071400063015	63 x 1 1/2" x 63	113	268	113	27	95	—	20	898
071400063020	63 x 2" x 63	113	272	110	30	95	—	20	903

87140

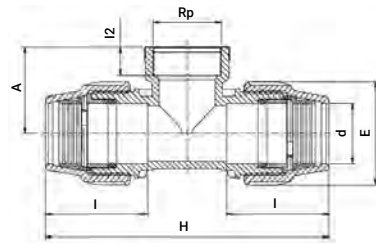


Product Code	Size d x Rp x d	E	H	I	I2	A	UB	UC	W
871400075020	75 x 2" x 75	132	370	137	30	110	—	9	1517
871400075025	75 x 2 1/2" x 75	132	342	134	35	85	—	9	1570
871400075030	75 x 3" x 75	132	370	137	36	110	—	9	1627
871400090030	90 x 3" x 90	152	418	164	41	116	—	7	2351
871400110040	110 x 4" x 110	181	516	200	52	140	—	4	4197

90° Slip Tee with Threaded Female Offtake

0714P0

Te de 90° roscas hembra de reparación

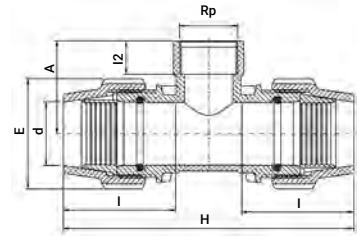


Product Code	Size d x Rp x d	E	H	I	I2	A	UB	UC	W
0714P0040010	40 x 1" x 40	82	203	84	21	61	—	60	361
0714P0050015	50 x 1 1/2" x 50	96	244	93	25	76	—	36	587
0714P0063013	63 x 1 1/4" x 63	113	268	113	27	95	—	20	860

Coupling with Riser


07810

Enlace recto con derivación rosca macho

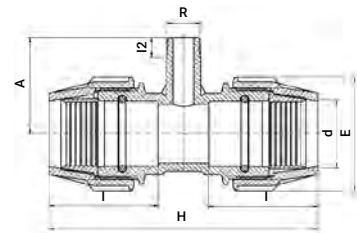

Product Code	Size d x R x d	E	H	I	I2	A	UB	UC	W
078100040007	40 x 3/4" x 40	82	215	89	18	85	5	50	366
078100050007	50 x 3/4" x 50	96	244	98	18	90	5	36	512
078100050010	50 x 1" x 50	96	244	98	20	90	5	36	551
078100063007	63 x 3/4" x 63	113	270	110	18	95	—	24	822
078100063010	63 x 1" x 63	113	270	110	20	95	—	24	820

87810

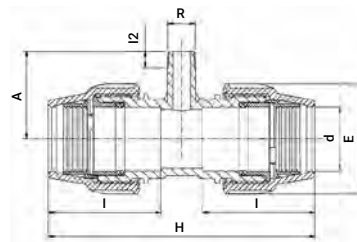


Product Code	Size d x R x d	E	H	I	I2	A	UB	UC	W
878100075007	75 x 3/4" x 75	132	324	137	18	105	—	100	1300
878100075010	75 x 1" x 75	132	324	137	20	105	—	70	1310

45° Tee


07640

Te de 45°

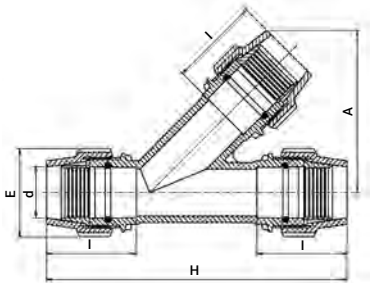

Product Code	Size d x d x d	E	H	I	A	UB	UC	W
076400063	63 x 63 x 63	113	374	110	207	—	10	1432

87640

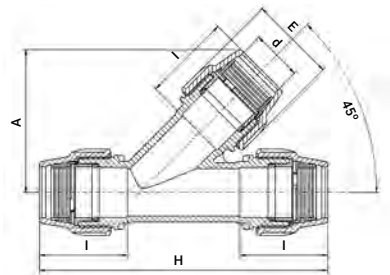


Product Code	Size d x d x d	E	H	I	A	UB	UC	W
876400075	75 x 75 x 75	132	446	137	204	—	130	2500
876400090	90 x 90 x 90	152	519	164	233	—	40	3600
876400110	110 x 110 x 110	181	630	196	284	—	120	6012

Compression Flange Adaptor (with Metal Flange)

07220*


Adaptador compresión-brida (con brida de metal)



Product Code	Size d x DN (inch)	E	H	I	D	Dp	S	No. of Holes	Metal-Flange Size	UC	W
072200040015	40 x 40 (1 1/2")	82	119	93	150	110	18	4	40 x 40	20	1200
072200050015	50 x 40 (1 1/2")	96	128	93	150	110	18	4	50 x 40	20	1213
072200050020	50 x 50 (2")	96	128	93	165	125	18	4	50 x 50	15	1517
072200063020	63 x 50 (2")	113	145	110	165	125	18	4	63 / 75 x 50	15	1563
072200125050	125 x 125 (5")	212	270	250	250	210	22	8	125 / 160 x 125	4	5550
072200125060	125 x 150 (6")	212	270	250	285	240	22	8	125 / 160 x 150	3	7037

* 072210 - Compression Flange Adaptor without metal flange | * 072210 - Sin brida de metal

87220*




Product Code	Size d x DN (inch)	E	H	I	D	Dp	S	No. of Holes	Metal-Flange Size	UC	W
872200075025	75 x 65 (2 1/2")	132	169	157	185	145	18	4	75 / 90 x 65	11	2200
872200090030	90 x 80 (3")	152	194	182	200	160	18	8	90 / 110 x 80	10	2429
872200090040	90 x 100 (4")	152	194	182	220	180	18	8	90 x 100	8	2980
872200110040	110 x 100 (4")	181	237	224	220	180	18	8	110 x 100	8	3402

* 872210 - Compression flange adaptor without metal flange | * 872210 - Sin brida de metal

Flange Adaptor (with Metal Flange)

072306*


Adaptador espiga-brida (con brida de metal)



Product Code	Size d x DN (inch)	H	D	Dp	S	No. of Holes	Metal-Flange Size	UC	W
0723060500150A	50 x 40 (1 1/2")	99	150	110	18	4	50 x 40	20	1064
0723060500200A	50 x 50 (2")	99	165	125	18	4	50 x 50	20	1396
0723060630200A	63 x 50 (2")	124	165	125	18	4	63 / 75 x 50	18	1293
0723060630250A	63 x 65 (2 1/2")	124	185	145	18	4	63 x 65	15	1880

* 072301 - Flange adaptor without metal flange | * 072301 - Sin brida de metal

872306*




Product Code	Size d x DN (inch)	H	D	Dp	S	No. of Holes	Metal-Flange Size	UC	W
872306075020	75 x 50 (2")	142	165	125	18	4	63 / 75 x 50	15	1402
872306075025	75 x 65 (2 1/2")	142	185	145	18	4	75 / 90 x 65	14	1568
872306075030	75 x 80 (3")	142	200	160	18	8	75 x 80	12	1981
872306090025	90 x 65 (2 1/2")	175	185	145	18	4	75 / 90 x 65	12	1754
872306090030	90 x 80 (3")	175	200	160	18	8	90 / 110 x 80	12	1858
872306090040	90 x 100 (4")	175	220	180	18	8	90 x 100	9	2180
872306110030	110 x 80 (3")	210	200	160	18	8	90 / 110 x 80	10	2019
872306110040	110 x 100 (4")	210	220	180	18	8	100 x 100	8	2329
872306110050	110 x 125 (5")	214	250	210	18	8	110 x 125	6	3987

* 872301 - Flange adaptor without metal flange | * 872301 - Sin brida de metal

Metal Flange

07006

Brida de metal

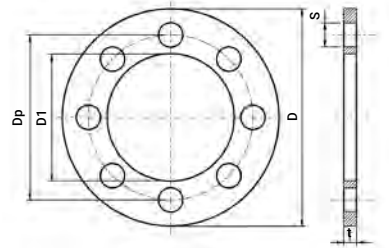


Product Code	Size d x DN (inch)	D	Dp	D1	S	t	Th* (mm)	Th* (inch)	No. of Holes	UC	W
070060050015P	50 x 40 (1 1/2")	150	110	82	18	10	M16	5/8	4	20	844
070060050020P	50 x 50 (2")	165	125	82	18	10	M16	5/8	4	20	1141
070060075020P	63 / 75 x 50 (2")	165	125	96	18	10	M16	5/8	4	20	986
070060063025P	63 x 65 (2 1/2")	185	145	96	18	10	M16	5/8	4	20	1420
070060075025P	75 / 90 x 65 (2 1/2")	185	145	112	18	10	M16	5/8	4	18	1350
070060075030P	75 x 80 (3")	200	160	112	18	10	M16	5/8	8	15	1430
070060090030P	90 / 110 x 80 (3")	200	160	132	18	10	M16	5/8	8	15	1215
070060090040P	90 x 100 (4")	220	180	132	18	10	M16	5/8	8	15	1720
070060110040P	110 x 100 (4")	220	180	151	18	10	M16	5/8	8	15	1416
070060110050P	110 x 125 (5")	250	210	151	18	10	M16	5/8	8	15	2850

* Nominal diameter of bolts | * Diametro nominal del tornillo

Threaded Adaptor

07250*

Adaptador compresión rosca macho



Product Code	Size d x R	E	H	I2	UB	UC	W
072500025005	25 x 1/2"	54	79	17	1	200	36
072500025007	25 x 3/4"	54	80	18	1	200	36
072500032005	32 x 1/2"	64	85	17	1	180	66
072500032007	32 x 3/4"	64	86	18	1	180	65
072500032010	32 x 1"	64	87	20	1	180	68
072500040010	40 x 1"	82	99	20	1	130	108
072500040013	40 x 1 1/4"	82	100	22	1	130	112
072500040015	40 x 1 1/2"	82	100	22	1	130	113
072500050010	50 x 1"	96	102	20	1	80	147
072500050013	50 x 1 1/4"	96	104	24	1	80	154
072500050015	50 x 1 1/2"	96	104	24	1	80	156
072500050020	50 x 2"	96	107	27	1	80	158
072500063010	63 x 1"	113	108	20	1	60	228
072500063013	63 x 1 1/4"	113	111	22	1	60	230
072500063015	63 x 1 1/2"	113	111	22	1	60	230
072500063020	63 x 2"	113	114	26	1	60	258
072500063025	63 x 2 1/2"	113	116	29	1	60	250
072500075015	75 x 1 1/2"	132	128	22	1	30	404
072500075020	75 x 2"	132	132	26	1	30	402
072500075025	75 x 2 1/2"	132	134	29	1	30	412
072500075030	75 x 3"	132	137	33	1	30	430


* Threaded Adaptor Body Cat. No. 078901. Threaded Adaptor Nut - Cat. No. 078940

* Cuerpo del adaptador roscado - Cat. No. 078901. Racor para el adaptador roscado - Cat. No. 078940

Brass Threaded Adaptor

07270

Adaptador rosca de latón




Product Code	Size d x R	E	H	I2	UB	UC	W
072700032010	32 x 1"	64	77	19	1	50	279
072700040010	40 x 1"	82	81	19	1	50	363
072700040013	40 x 1 1/4"	82	90	21	1	50	487
072700050013	50 x 1 1/4"	96	95	21	1	30	523
072700050015	50 x 1 1/2"	96	97	21	1	30	554
072700063013	63 x 1 1/4"	113	105	21	1	20	767
072700063020	63 x 2"	113	112	25	1	20	985

Plass4 (Universal) Coupling

070170

Plass4 Enlace (universal)

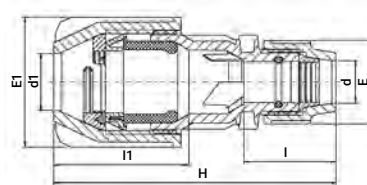


Product Code	Size d x d1	E	E1	H	I	I1	UB	UC	W
070170020027	20 x 20 - 27	48	71	169	57	85	1	80	206
070170025022	25 x 15 - 22	54	64	165	58	80	1	90	183
070170025027	25 x 20 - 27	54	71	170	58	85	1	80	216
070170025035	25 x 27 - 35	54	83	180	58	90	1	60	281
070170032027	32 x 20 - 27	64	71	180	67	85	1	70	240
070170032035	32 x 27 - 35	64	83	195	67	90	1	60	312
070170050050	50 x 35 - 50	96	121	270	93	125	1	20	901

Plass4 (Universal) 90° Elbow

070570

Plass4 - Codo de 90° (universal)




Product Code	Size d x d1	E	E1	I	I1	A	A1	UB	UC	W
070570025022	25 x 15 - 22	54	64	58	105	81	128	1	80	198
070570025027	25 x 20 - 27	54	71	58	105	81	139	1	80	238
070570025035	25 x 27 - 35	54	83	58	112	81	153	1	60	305

Y-Fitting with Threaded Male Offtake

07550

Y compresión rosca macho




Product Code	Size d x d1 x R	E	E1	I	I1	I2	A	A1	UB	UC	W
075506016007	16 x 16 x 3/4"	39	39	50	50	18	100	100	10	200	75
075500020016	20 x 16 x 3/4"	48	39	57	50	18	108	105	10	180	103
075500020007	20 x 20 x 3/4"	48	48	57	57	18	114	114	10	120	130
075500025007	25 x 25 x 3/4"	54	54	58	58	18	125	125	5	100	154

* In this case diameter should read: d x d x G | * En este caso el diametro debe leido: d x d x G

Cross with Threaded Female Offtake

07540

Cruz compresión rosca hembra

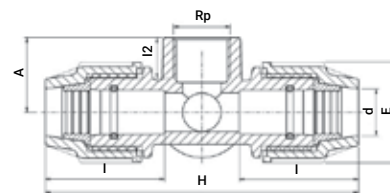


Product Code	Size d x d x d x d x Rp	E	H	I	I2	A	UB	UC	W
075400020007	20 x 20 x 20 x 20 x 3/4"	48	149	57	21	35	5	80	204

Plug Adaptor

071209

Tapón ciego




Product Code	Size d	E	H	UB	UC	W
071209020	20	48	47	10	1800	5
071209025	25	54	51	10	1500	8
071209032	32	64	56	10	1000	15
071209040	40	82	66	10	720	24
071209050	50	96	80	10	400	41
071209063	63	113	96	10	200	76

Pipe Liner for PE SDR 11 Pipe

07950

Refuerzo de tubos




Product Code	Size d *	H	UB	UC	W
079500020	20 x 1.9	63	10	3200	5
079500025	25 x 2.3	63	10	1680	10
079500032	32 x 3.0	79	10	920	13
079500040	40 x 3.7	97	10	480	25
079500050	50 x 4.6	106	10	240	45
079500063	63 x 5.8	125	5	110	72

* O.D. of pipe x wall thickness of pipe | * Diametro externo del tubo x espesor del tubo

Adaptor for Copper and Imperial UPVC

07896*

Adaptador para cobre y PVCU




Product Code	Size d x d1	E	I	UB	UC	W
07896015P	20 x 15	48	66	25	1500	15
07896022P	25 x 22	54	64	20	1200	15
07896028P	32 x 28	64	74	20	700	27
07896035P	40 x 35	82	92	10	240	54
07896042P	50 x 42	96	105	10	160	111

* No Pull-Out Resistance | * Sin resistencia a la tracción

Reducing Set


07930

Juego reductor



Product Code	Size d x d1	E	I	UB	UC	W
079300025020	25 x 20	54	56	-	300	23
079300032020	32 x 20	64	62	-	300	38
079300032025	32 x 25	64	60	-	250	35
079300040020	40 x 20	82	73	-	180	62
079300040025	40 x 25	82	69	-	180	81
079300040032	40 x 32	82	77	-	200	62
079300050025	50 x 25	96	85	-	120	114
079300050032	50 x 32	96	87	-	120	112
079300050040	50 x 40	96	85	-	120	97
079300063025	63 x 25	113	103	-	80	217
079300063032	63 x 32	113	102	-	80	214
079300063040	63 x 40	113	103	-	80	202
079300063050	63 x 50	113	105	-	80	187

87930




Product Code	Size d x d1	E	I	UB	UC	W
879300075063	75 x 63*	132	121	1	40	220
879300110063	110 x 63	181	131	1	24	705
879300110075	110 x 75	181	145	1	15	655
879300110090	110 x 90	181	154	1	140	671

* Assembled without the inserts

Modular Adaptor

07940

Adaptador modulado




Product Code	Size d	E	H	I	UB	UC	W
079400020	20	48	80	10	10	300	50
079400025	25	54	80	10	10	250	61
079400032	32	64	93	10	5	180	104
079400040	40	82	102	10	5	100	173
079400050	50	93	107	10	—	70	257
079400063	63	113	119	10	—	45	422

Copper Pipe Adaptor

0701C0

Adaptador para tubo de cobre

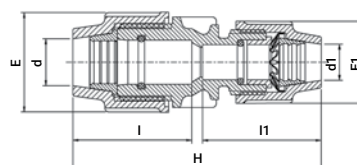


Product Code	Size d (PE) x d1 (Cu)	E	E1	H	I	I1	UB	UC	W
0701C0020005	20 x 15	48	39	115	56	54	—	200	103
0701C0025015	25 x 15	54	39	124	55	54	—	180	86
0701C0025022	25 x 22	54	54	136	60	71	—	150	132
0701C0032028	32 x 28	64	64	150	70	77	—	100	204

Grip Ring for UPVC and PP pipe

07970


Casquillo de apriete para tubos de UPVC y PP

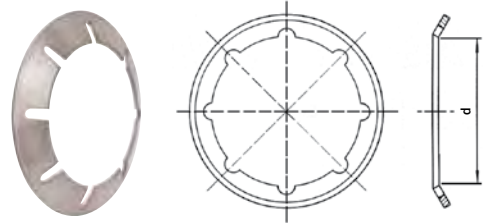

Product Code	Size d	UB	UC	W
07970020	20	—	10000	1
07970025	25	—	10000	2
07970032	32	—	10000	3
07970040	40	—	1000	6
07970050	50	—	1000	10
07970063	63	—	1000	17

Conversion Set for Copper Pipe (Europe + UK dimensions) 07438

Juego adaptador para tubos de cobre

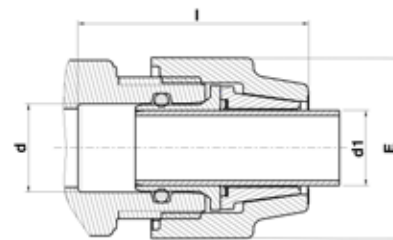

Product Code	Size d x d1	E	I	UB	UC	W
07438015	20 x 15	48	67	10	360	20
07438016	25 x 15	54	69	10	360	29
07438022	25 x 22	54	67	10	360	25
07438028	32 x 28	64	77	10	300	27
07438035	40 x 35	82	92	10	300	38
07438042	50 x 42	96	105	10	250	64
07438054	63 x 54	113	121	1	150	102

Conversion Set for Copper Pipe (CTS dimensions)

Product Code	Size d x d1	E	I	UB	UC	W
07439204	20 x 1/2" (O.D. 15.8mm)	48	67	10	600	20
07439257	25 x 3/4" (O.D. 22.2mm)	54	69	10	500	33


Conversion Set for Copper Pipe (Austalian AS1432 dimensions)

Product Code	Size d x d1	E	I	UB	UC	W
07439205	20 x 15 (1/2") (O.D. 12.7mm)	48	67	10	600	20
07439251	25 x 20 (3/4") (O.D. 19.5mm)	54	69	10	500	33
07439257	25 x 25 (1") (O.D. 25.4mm)	54	69	10	500	33

Coupling for PVC Pipe

0701QQ

Enlace recto para tubo de PVC

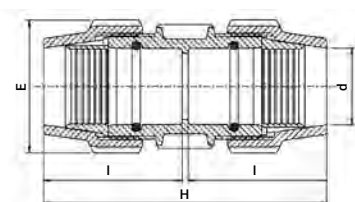


Product Code	Size d x d	E	H	I	UB	UC	W
0701QQ090	90 x 90	154	335	165	—	10	1898
0701QQ110	110 x 110	181	393	194	—	5	3129
0701QQ125	125 x 125	212	460	225	—	3	5347

Conversion Set for Lead Pipe

077802


Juego adaptador para tubos de plomo



Product Code	Size d x d1	E	I	UB	UC	W
077802025003	25 x 3/8" 5 LB	54	67	5	1000	15
077802025005	25 x 1/2" 7 LB	54	64	5	1500	8
077802032005	32 x 1/2" 9 LB	64	77	5	500	24
077802032007	32 x 3/4" 9 LB	64	76	5	1000	13
077802040007	40 x 3/4" 11 LB	82	95	5	400	42
077802050010	50 x 1" 16 LB	96	104	5	250	68

Converter Rubber Adaptor for Steel and Galvanized Pipe 078908*

Conversor de goma para tubos de acero galvanizado




Product Code	Size d x d1	E	I	UB	UC	W
078908010	40 x 1"	82	89	5	200	60
078908013	50 x 1 1/4"	96	98	5	150	89
078908015	50 x 1 1/2"	96	90	5	150	35
078908020	63 x 2"	113	108	5	120	71

* Without pullout resistance | * Extraccion sin resistencia

Conversion Set Adaptor for Steel and Galvanised Pipe 078907

Juego de conversion para tubos de acero galvanizado



Product Code	Size d x d1	E	I	UB	UC	W
078907010	40 x 1"	82	96	5	200	117
078907013	50 x 1 1/4"	96	105	5	140	150
078907015	50 x 1 1/2"	96	115	5	150	125
078907020	63 x 2"	113	117	5	100	226

Pipe Conversion Chart


Metric PE / Metric U-PVC / Metric PP / Galvanised Steel / Lead Pipe / Imperial U-PVC/Copper

PE métrico / PP y PVCU métrico / Acero galvanizado / Plomo / U-PVC imperial / Cobre...


The basic fitting is a dedicated product for joining metric PE pipe. It will securely join the pipe without any additional components. The fittings can be easily converted for use with other materials simply by adding a conversion set. PLASSON offers a full range of conversion sets to provide exceptional adaptability.

El accesorio PLASSON es un producto dedicado a conectar tuberías de HDPE sin componentes adicionales, con la máxima seguridad. Los accesorios pueden ser convertidos fácilmente a cualquier tipo de tubería usando un juego de conversión acorde. PLASSON ofrece una gama amplia que permite una adaptabilidad excepcional.

Copper (without pullout resistance)
Cobre (sin resistencia a tracción)

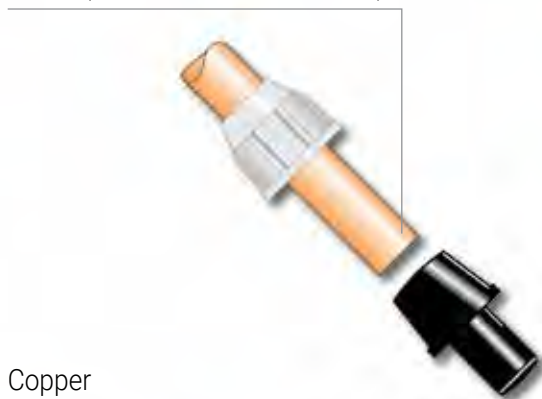

Copper
Cobre

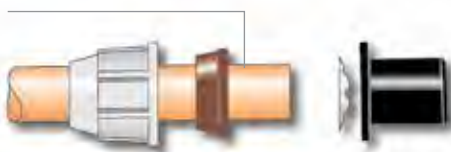


Metric PE
PE métrico



Metric U-PVC & PP
PVC - U y PP métrico



Galvanised steel (without pullout resistance)
Acero galvanizado (sin resistencia a tracción)



Imperial U-PVC (without pullout resistance)
U-PVC imperial (sin resistencia a tracción)



Galvanised steel
Acero galvanizado




Lead pipe
Plomo

Nut


07004

Racor



Product Code	Size d	E	H	I2	UB	UC	W
070046016P	16	39	40	23	10	1000	12
070040020P	20	48	45	26	10	700	22
070040025P	25	54	46	26	10	500	26
070040032P	32	64	51	30	5	300	41
070040040P	40	82	63	34	—	200	70
070040050P	50	96	71	34	—	125	104
070040063P	63	113	89	43	—	100	171
070040125P	125	212	185	107	—	10	1135

87004




Product Code	Size d	E	H	I2	UB	UC	W
870040075P	75	132	110	56	—	45	293
870040090P	90	153	135	73	—	30	467
870040110P	110	181	170	97	—	16	832

O - Ring NBR

07002

Junta tórica (NBR)



Product Code	Size d	E1	e	UB	UC	W
070020016P	16	15	3	—	30000	1
070020020P	20	19	3	—	32000	1
070020025P	25	24	4	—	12000	1
070020032P	32	31	5	—	8000	2
070020040P *	40	39	6	—	4000	5
070020050P *	50	49	7	—	2500	8
070020063P *	63	62	7	—	2000	10
070020075P	75	74	8	—	1600	16
070020090P	90	89	8	—	1500	17
070020110P	110	108	9	—	850	27
070020125P	125	122	10	—	700	50
070020160P	160	158	12	—	16000	74

* Only for slip repair coupling and tee

O - Ring EPDM (Blue Mark)

07002D0

Junta tórica EPDM, (marca azul)

Product Code	Size d	E1	e	UB	UC	W
07002D016P	16	15	3	—	30000	1
07002D020P	20	19	3	—	16000	1
07002D025P	25	24	4	—	16000	1
07002D032P	32	31	5	—	8000	2
07002D075P	75	74	8	—	1600	16
07002D090P	90	89	8	—	1400	17
07002D110P	110	108	9	—	900	27

O - Ring Viton FPM (White Mark)

07002V0

Junta tórica FPM, (marca blanca)


Product Code	Size d	E1	e	UB	UC	W
03050905P	16	15	3	—	30000	2
07002V020P	20	19	3	—	32000	2
07002V025P	25	24	4	—	16000	2
07002V032P	32	31	5	—	8000	4
07002V040P *	40	39	6	—	4000	7
07002V050P *	50	49	7	—	2500	12
07002V063P *	63	62	7	—	2000	15
07002V075P	75	74	8	—	1600	23
07002V090P	90	89	8	—	1400	28
07002V110P	110	108	9	—	900	43

* Only for slip repair coupling and tee

Seal - NBR

070029

Sello de NBR



Product Code	Size d	E1	e	UB	UC	W
070029040P	40	38	8	50	2600	4
070029050P	50	49	9	50	1600	8
070029063P	63	62	9	50	1500	9

Seal EPDM (Blue Mark)

07002D9

Sello EPDM, (marca azul)

Product Code	Size d	E1	e	UB	UC	W
07002D940P	40	38	8	20	4000	4
07002D950P	50	49	9	20	2500	7
07002D963P	63	62	9	20	2000	9

Seal Viton FPM (White Mark)

07002V9


Sello de Viton FPM, (marca blanca)

Product Code	Size d	E1	e	UB	UC	W
07002V940P	40	38	8	20	4000	7
07002V950P	50	49	9	20	2500	12
07002V963P	63	62	9	20	2000	14

Seal - EPDM

87910

Sello de EPDM



Product Code	Size d	E1	e	UB	UC	W
87910075	75	77	22	10	80	24
87910090	90	92	22	10	50	18
87910110	110	112	24	10	120	27

Seal Viton FPM (White Mark)

87920


Sello de Viton FPM, (marca blanca)

Product Code	Size d	E1	e	UB	UC	W
87920075	75	77	22	10	100	23
87920090	90	92	22	10	70	28
87920110	110	112	24	10	24	43

Split Ring - Polyacetal

07003

Casquillo de apriete (acetal)




Product Code	Size d	E	H	UB	UC	W
070030016P	16	23	12	100	12000	1
070030020P	20	31	13	100	6500	3
070030025P	25	36	13	100	4500	4
070030032P	32	44	19	50	2000	7
070030040P	40	55	24	50	1200	12
070030050P	50	67	30	20	500	25
070030063P	63	83	37	10	300	46
070030125P	125	161	72	—	35	291

Split Ring - Polyacetal

87003

Casquillo de apriete (acetal)




Product Code	Size d	D	H	H1	UB	UC	W
870030075P	75	99	30	14	—	300	53
870030090P	90	115	34	16	—	170	76
870030110P	110	140	42	19	—	100	133

Split Ring - CPVC

07003V

Casquilla de apriete (CPVC)




Product Code	Size d	E	H	UB	UC	W
07003V016P	16	23	12	100	12000	3
07003V020P	20	31	13	100	6500	4
07003V025P	25	36	13	100	4500	5
07003V032P	32	44	19	50	1500	11
07003V040P	40	55	24	—	1200	19
07003V050P	50	67	30	—	500	32
07003V063P	63	83	37	—	300	53

Split Ring - CPVC

87003V

Casquilla de apriete (CPVC)




Product Code	Size d	D	H	H1	UB	UC	W
87003V075P	75	99	30	13	—	240	53
87003V090P	90	115	34	14	—	115	90
87003V110P	110	140	42	16	—	70	151

Insert

07005

Inserto de PP



Product Code	Size d	D	H	UB	UC	W
070050016P	16	17	12	100	8700	1
070050020P	20	29	10	100	5000	1
070050025P	25	36	11	100	4000	3
070050032P	32	45	11	100	4000	6
070050075P	75	94	17	—	300	31
070050090P	90	116	25	—	160	56
070050110P	110	138	30	—	100	81
070050125P	125 Upper	164	48	—	80	153
070051125P	125 Lower	142	18	—	160	204

87005



Product Code	Size d	D	H	UB	UC	W
870050075P	75	77	27	—	300	37
870050090P	90	92	31	—	200	48
870050110P	110	113	40	—	100	80

Chamfer Tool for PE Pipes

18960

Herramienta para biselar



Product Code	Size	UB	UC	W
189600063020P	20 - 63	—	180	202

Chamfer Tool for PE Pipes

07960

Herramienta para biselar



Product Code	Size	UB	UC	W
079600063020	20 - 63	1	180	86

PLASSON Wrench

07990

Llave PLASSON




Product Code	Size	UB	UC	W
07990001	16 - 40	—	250	65
07990005	40 - 75	—	75	296
07990000	63 - 125	—	40	840

Coupling

070106

Enlace recto



Product Code	Size d x d	E	I	H	UB	UC	W
0701061600A	160 x 160	280	204	418	—	2	8888

Repair Coupling

076106


Enlace recto de reparación

Product Code	Size d x d	E	I	H	UB	UC	W
0761061600A	160 x 160	280	204	418	—	2	9170

90° Tee

070406

Te de 90°




Product Code	Size d x d x d	E	I	H	A	UB	UC	W
0704061600A	160 x 160 x 160	280	204	601	301	—	1	14738

90° Elbow

070506

Codo de 90°




Product Code	Size d x d	E	I	A	UB	UC	W
0705061600A	160 x 160	280	204	301	—	2	10008

Compression Flange Adaptor (with Metal Flange)

072206

Adaptador compresión-brida (con brida de metal)




Product Code	Size d x DN (inch)	E	H	I	D	Dp	S	No. of Holes	Metal-Flange Size	UC	W
0722061600500A	160 x 125 (5")	280	304	204	250	210	18	8	125 / 160 x 125	3	7700
0722061600600A	160 x 150 (6")	280	304	204	285	240	22	8	125 / 160 x 150	3	9151

Flange Adaptor (with Metal Flange)

072306

Adaptador brida (con brida de metal)




Product Code	Size d x DN (inch)	H	D	Dp	S	No. of Holes	Metal-Flange Size	UC	W
0723061600500A	160 x 125 (5")	265	250	210	18	8	125 / 160 x 125	6	4345
0723061600600A	160 x 150 (6")	265	285	240	22	8	125 / 160 x 150	5	5650

Shouldered Adaptor

073206

Adaptador minero




Product Code	Size d x DN (inch)	E	H	I	L	B	UB	UC	W
0732061600600A	160 x 150 (6")	280	304	204	18	175	—	4	5170

Half Metal Flange

07006

Brida de metal




Product Code	Size d x DN (inch)	D	Dp	D1	S	t	Th* (mm)	Th* (inch)	No. of Holes	UC	W
070060160050P	125 / 160 x 125 (5")	250	210	170	18	12	M16	5/8	4	1100	—
070060160060P	125 / 160 x 150 (6")	250	240	170	22	12	M20	3/4	4	1800	—

* Nominal diameter of bolts | * Diametro nominal del tornillo

Saddle Single Outlet with Reinforcing Ring

16076*

Collarin simple con anillo de refuerzo

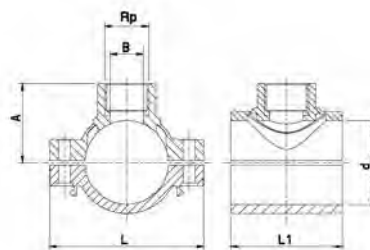


Product Code	Size d x Rp	B	L	L1	A	No. of Bolts	UB	UC	W
160760020005	20 x 1/2"	10	70	45	33	2	1	400	63
160760025005	25 x 1/2"	15	75	50	36	2	1	300	70
160760025007	25 x 3/4"	15	75	50	37	2	1	300	73
160760032005	32 x 1/2"	16	92	60	40	2	1	150	133
160760032007	32 x 3/4"	19	92	60	41	2	1	150	135
160760032010	32 x 1"	20	92	60	42	2	1	150	142
160760040005	40 x 1/2"	16	92	60	45	2	1	150	141
160760040007	40 x 3/4"	19	92	60	46	2	1	150	143
160760040010	40 x 1"	25	92	60	49	2	1	150	151
160760050005	50 x 1/2"	16	106	73	51	2	1	100	179
160760050007	50 x 3/4"	21	106	73	52	2	1	100	180
160760050010	50 x 1"	25	106	73	54	2	1	100	187
160760050013	50 x 1 1/4"	25	106	73	58	2	1	100	212
160760063005	63 x 1/2"	16	116	84	58	4	1	70	278
160760063007	63 x 3/4"	20	116	84	59	4	1	70	279
160760063010	63 x 1"	25	116	84	61	4	1	70	286
160760063013	63 x 1 1/4"	32	116	84	66	4	1	70	308
160760063015	63 x 1 1/2"	39	116	84	67	4	1	60	322
160760075005	75 x 1/2"	16	122	98	64	4	1	60	369
160760075007	75 x 3/4"	20	122	98	65	4	1	55	369
160760075010	75 x 1"	25	122	98	67	4	1	55	376
160760075013	75 x 1 1/4"	32	122	98	72	4	1	55	398
160760075015	75 x 1 1/2"	40	122	98	73	4	1	50	411
160760075020	75 x 2"	40	122	98	78	4	1	45	433
160760090005	90 x 1/2"	16	141	105	72	4	1	40	453
160760090007	90 x 3/4"	20	141	105	73	4	1	40	454
160760090010	90 x 1"	25	141	105	75	4	1	40	460
160760090013	90 x 1 1/4"	32	141	105	80	4	1	40	483
160760090015	90 x 1 1/2"	40	141	105	81	4	1	40	467
160760090020	90 x 2"	50	141	105	86	4	1	40	511
160760110005	110 x 1/2"	16	165	116	83	4	1	45	561
160760110007	110 x 3/4"	20	165	116	84	4	1	45	562
160760110010	110 x 1"	25	165	116	87	4	1	36	567
160760110013	110 x 1 1/4"	32	165	116	91	4	1	36	588
160760110015	110 x 1 1/2"	40	165	116	92	4	1	36	600
160760110020	110 x 2"	50	165	116	97	4	1	30	615
160760125007	125 x 3/4"	20	184	124	91	6	1	30	762
160760125010	125 x 1"	25	184	124	94	6	1	30	755
160760125013	125 x 1 1/4"	32	184	124	98	6	1	30	778
160760125015	125 x 1 1/2"	40	184	124	99	6	1	30	781
160760125020	125 x 2"	50	184	124	104	6	1	25	796
160760140010	140 x 1"	25	201	136	101	6	1	24	893
160760140013	140 x 1 1/4"	32	201	136	106	6	1	24	912
160760140015	140 x 1 1/2"	40	201	136	107	6	1	24	922
160760140020	140 x 2"	50	201	136	112	6	1	20	938
160760160010	160 x 1"	25	223	145	112	6	1	20	1039
160760160013	160 x 1 1/4"	32	223	145	117	6	1	20	1061
160760160015	160 x 1 1/2"	40	223	145	118	6	1	20	1071
160760160020	160 x 2"	50	223	145	123	6	1	20	1080
160760180010	180 x 1"	25	245	154	122	6	1	16	1314
160760180013	180 x 1 1/4"	32	245	154	127	6	1	16	1319
160760180015	180 x 1 1/2"	40	245	154	128	6	1	16	1349
160760180020	180 x 2"	50	245	154	133	6	1	16	1334

16086 - without reinforcing ring, 16077 - With stainless steel bolts

Saddle Double Outlet with Reinforcing Ring Options

16176*

Collarin doble con anillo de refuerzo

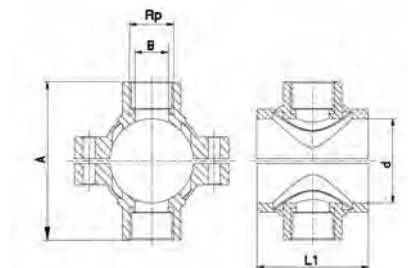

Product Code	Size d x Rp	B	L	L1	A	No. of Bolts	UB	UC	W
161760020005	20 x 1/2"	10	70	45	66	2	1	300	73
161760025005	25 x 1/2"	15	75	50	71	2	1	250	81
161760025007	25 x 3/4"	15	75	50	73	2	1	250	86
161760032005	32 x 1/2"	16	92	60	80	2	1	140	144
161760032007	32 x 3/4"	19	92	60	82	2	1	140	148
161760032010	32 x 1"	20	92	60	84	2	1	140	163
161760040005	40 x 1/2"	16	92	60	89	2	1	120	153
161760040007	40 x 3/4"	19	92	60	91	2	1	120	157
161760040010	40 x 1"	25	92	60	98	2	1	120	174
161760050005	50 x 1/2"	16	106	73	102	2	1	80	193
161760050007	50 x 3/4"	21	106	73	104	2	1	80	196
161760050010	50 x 1"	25	106	73	109	2	1	80	210
161760050013	50 x 1 1/4"	25	106	73	117	2	1	80	260
161760063005	63 x 1/2"	16	116	84	116	4	1	80	293
161760063007	63 x 3/4"	20	116	84	118	4	1	70	296
161760063010	63 x 1"	25	116	84	123	4	1	70	310
161760063013	63 x 1 1/4"	32	116	84	132	4	1	70	354
161760063015	63 x 1 1/2"	39	116	84	133	4	1	60	382
161760075005	75 x 1/2"	16	122	98	128	4	1	60	382
161760075007	75 x 3/4"	20	122	98	130	4	1	60	382
161760075010	75 x 1"	25	122	98	135	4	1	50	397
161760075013	75 x 1 1/4"	32	122	98	144	4	1	50	438
161760075015	75 x 1 1/2"	40	122	98	145	4	1	50	465
161760075020	75 x 2"	40	122	98	155	4	1	40	513
161760090005	90 x 1/2"	16	141	105	143	4	1	45	467
161760090007	90 x 3/4"	20	141	105	146	4	1	45	468
161760090010	90 x 1"	25	141	105	151	4	1	45	482
161760090013	90 x 1 1/4"	32	141	105	160	4	1	40	526
161760090015	90 x 1 1/2"	40	141	105	162	4	1	40	546
161760090020	90 x 2"	50	141	105	172	4	1	36	585
161760110005	110 x 1/2"	16	165	116	166	4	1	40	575
161760110007	110 x 3/4"	20	165	116	168	4	1	40	577
161760110010	110 x 1"	25	165	116	173	4	1	36	586
161760110013	110 x 1 1/4"	32	165	116	182	4	1	30	628
161760110015	110 x 1 1/2"	40	165	116	187	4	1	30	653
161760110020	110 x 2"	50	165	116	196	4	1	24	685
161760125007	125 x 3/4"	20	184	124	182	6	1	20	814
161760125010	125 x 1"	25	184	124	187	6	1	20	814
161760125013	125 x 1 1/4"	32	184	124	196	6	1	20	814
161760125015	125 x 1 1/2"	40	184	124	198	6	1	20	834
161760125020	125 x 2"	50	184	124	208	6	1	20	761
161760140010	140 x 1"	25	201	136	202	6	1	20	948
161760140013	140 x 1 1/4"	32	201	136	212	6	1	20	947
161760140015	140 x 1 1/2"	40	201	136	213	6	1	20	967
161760140020	140 x 2"	50	201	136	223	6	1	20	1001
161760160010	160 x 1"	25	223	145	223	6	1	16	1055
161760160013	160 x 1 1/4"	32	223	145	233	6	1	16	1098
161760160015	160 x 1 1/2"	40	223	145	235	6	1	16	1119
161760160020	160 x 2"	50	223	145	245	6	1	16	1137
161760180010	180 x 1"	25	245	154	243	6	1	16	1310
161760180013	180 x 1 1/4"	32	245	154	253	6	1	16	1335
161760180015	180 x 1 1/2"	40	245	154	255	6	1	16	1247
161760180020	180 x 2"	50	245	154	265	6	1	16	1368

16186 - without reinforcing ring, 16177 - With stainless steel bolts

Plated Nut & Bolt for Saddles

16005*

Tornillo y tuerca de acero niquelado para collarin




Product Code	Bolt Dimensions/mm	Saddles
16005306	6 x 30	20 - 25
16005458	8 x 45	32 - 40 - 50 - 63
16005608	8 x 60	75 - 90 - 110
16005708	8 x 70	125 - 140 - 160 - 180

* Nuts & Bolts also available in stainless steel | * Tornillos y tuercas, a disposición, en acero inoxidable

Mechanical Tapping Valve

18680

Valvula mecanica con salida rotatoria tapper



Product Code	Size d x d1	L	L1*	H	H1	H2	E	I	UB	UC	W
186800063032	63 x 32	116	84	135	55	240	64	67	1	8	2090
186800063063	63 x 63	116	84	200	60	240	113	110	1	8	2210
186800075032	75 x 32	122	98	135	60	244	64	67	1	8	1840
186800075063	75 x 63	122	98	200	65	244	113	110	1	8	2230
186800090032	90 x 32	141	105	135	60	244	64	67	1	8	2150
186800090063	90 x 63	141	105	200	65	244	113	110	1	8	2270
186800110032	110 x 32	165	116	135	60	244	64	67	1	8	2270
186800110063	110 x 63	165	116	200	65	244	113	110	1	8	2730
186800125032	125 x 32	184	124	135	60	244	64	67	1	8	2280
186800125063	125 x 63	184	124	200	65	244	113	110	1	8	2390
186800140032	140 x 32	201	136	135	60	244	64	67	1	8	2290
186800140063	140 x 63	201	136	200	65	244	113	110	1	6	2440
186800160032	160 x 32	223	145	135	60	244	64	67	1	6	2490
186800160063	160 x 63	223	145	200	65	244	113	110	1	6	2440
186800180032	180 x 32	245	154	135	60	244	64	67	1	6	2550
186800180063	180 x 63	245	154	200	65	244	113	110	1	4	2550

* L1 - Length along pipe | * L1 - Longitud del collarine



PLASSADDLE

PLASSON Mechanical Saddle




"PLASSADDLE" – PLASSON's revolutionary mechanical saddle

PLASSON is proud to introduce its newly designed mechanical saddle, featuring fast, bolt free installation as well as some of our well-established mechanical fitting features:

- Fast and Innovative tightening mechanism
- No bolts
- Non-corrosive, strong and durable plastic parts - no metal components
- Integral seals - no need for thread sealants

PLASSADDLE Threaded

16300




Product Code	Size d x Rp	B	L	E1	H1	H2	UB	UC	W
163000063005*	63 x 1/2"	91	89	102	136	49	1	50	380
163000063007	63 x 3/4"	91	89	102	136	49	1	50	380
163000063010	63 x 1"	91	89	102	136	49	1	50	390
163000063013*	63 x 1 1/4"	91	89	102	146	58	1	50	390
163000063015	63 x 1 1/2"	91	89	102	136	49	1	50	370
163000075005	75 x 1/2"	104	92	102	149	49	1		
163000075007	75 x 3/4"	104	92	102	149	49	1		
163000075010	75 x 1"	104	92	102	149	49	1		
163000075013	75 x 1 1/4"	104	92	102	149	49	1		
163000075015	75 x 1 1/2"	104	92	102	149	49	1		
163000090005*	90 x 1/2"	119	94	102	163	49	1	50	460
163000090007	90 x 3/4"	119	94	102	163	49	1	50	460
163000090010	90 x 1"	119	94	102	163	49	1	50	460
163000090013*	90 x 1 1/4"	119	94	102	173	58	1	50	460
163000090015	90 x 1 1/2"	119	94	102	163	49	1	50	450
163000110005*	110 x 1/2"	141	97	102	180	49	1	40	
163000110007	110 x 3/4"	141	97	102	180	49	1	40	500
163000110010	110 x 1"	141	97	102	180	49	1	40	510
163000110013*	110 x 1 1/4"	141	97	102	190	58	1	40	510
163000110015*	110 x 1 1/2"	141	97	102	180	49	1	40	490
163000125005*	125 x 1/2"	157	100	102	198	49	1	36	
163000125007	125 x 3/4"	157	100	102	198	49	1	36	570
163000125010	125 x 1"	157	100	102	198	49	1	36	570
163000125013*	125 x 1 1/4"	157	100	102	207	58	1	36	550
163000125015	125 x 1 1/2"	157	100	102	198	49	1	36	550
163000160005*	160 x 1/2"	197	106	102	235	49	1	28	
163000160007	160 x 3/4"	197	106	102	235	49	1	28	710
163000160010	160 x 1"	197	106	102	235	49	1	28	770
163000160013*	160 x 1 1/4"	197	106	102	235	58	1	28	710
163000160015	160 x 1 1/2"	197	106	102	235	49	1	28	690
163000180005*	180 x 1/2"	220	110	102	255	49	1	24	810
163000180007	180 x 3/4"	220	110	102	255	49	1	24	810
163000180010	180 x 1"	220	110	102	255	49	1	24	810
163000180013*	180 x 1 1/4"	220	110	102	264	58	1	24	820
163000180015	180 x 1 1/2"	220	110	102	255	49	1	24	800
163000200005	200 x 1/2"	246	115	102	272	49	1	16	1100
163000200007	200 x 3/4"	246	115	102	272	49	1	16	1100
163000200010	200 x 1"	246	115	102	272	49	1	16	1100
163000200013	200 x 1 1/4"	246	115	102	272	58	1	16	1110
163000200015	200 x 1 1/2"	246	115	102	272	49	1	16	1090

* Will be available during 2022



PLASSADDLE Tapper


16310



Product Code	Size d x d1	B	L	E	E1	H1	H2	H3	UB	UC	W
163100063025	63 x 25	91	89	54	102	231	144	106	1	30	640
163100063032	63 x 32	91	89	64	102	231	144	111	1	30	670
163100075025	75 x 25	104	92	102	115	239	144	106	1		
163100075032	75 x 32	104	92	102	115	239	144	111	1		
163100090025	90 x 25	119	94	54	102	258	144	106	1	25	710
163100090032	90 x 32	119	94	64	102	258	144	111	1	25	750
163100110025	110 x 25	141	97	54	102	273	144	106	1	25	760
163100110032	110 x 32	141	97	64	102	273	144	111	1	25	790
163100125025	125 x 25	157	100	54	102	290	144	106	1	24	820
163100125032	125 x 32	157	100	64	102	290	144	111	1	20	850
163100160025	160 x 25	198	106	54	102	325	144	106	1	20	970
163100160032	160 x 32	198	106	64	102	325	144	111	1	20	1000
163100180025	180 x 25	220	110	54	102	350	144	106	1	16	1050
163100180032	180 x 32	220	110	64	102	350	144	111	1	16	1100
163100200025	200 x 25	246	144	102	115	368	144	106	1	15	1350
163100200032	200 x 32	246	144	102	115	368	144	111	1	15	1380

PLASSADDLE Tapper Male

1631R




Product Code	Size d x d1	B	L	E1	H1	H2	H3	UB	UC	W
1631R0063010	63 x 1"	91	89	102	231	144	78	1	30	600
1631R0075010	75 x 1"	104	92	102	239	144	78	1		
1631R0090010	90 x 1"	119	94	102	258	144	78	1	30	680
1631R0110010	110 x 1"	141	97	102	273	144	78	1	25	720
1631R0125010	125 x 1"	157	100	102	290	144	78	1	25	790
1631R0160010	160 x 1"	198	106	102	325	144	78	1	20	930
1631R0180010	180 x 1"	220	110	102	350	144	78	1	20	1030
1631R0200010	200 x 1"	246	115	102	368	144	78	1	15	1320

Threaded Socket

050107*

Manguito rosca hembra x hembra




Product Code	Size Rp x Rp	E	H	I2	UB	UC	W
050107005	1/2" x 1/2"	30	39	17	10	1200	15
050107007	3/4" x 3/4"	36	41	19	10	1000	19
050107010	1" x 1"	46	45	21	10	600	31
050107013	1 1/4" x 1 1/4"	60	54	25	10	250	65
050107015	1 1/2" x 1 1/2"	65	54	25	10	250	76
050107020	2" x 2"	75	66	31	5	150	94

* With reinforcing ring - Cat. No. 050117 | * Con anillo de refuerzo - Cat. No. 050117

Threaded Reducing Bushing

050207

Manguito reductor hembra x macho




Product Code	Size R x Rp	E	H	I2	UB	UC	W
050207007005	3/4" x 1/2"	27	30	17	10	2000	6
050207010005	1" x 1/2"	36	32	19	10	1000	16
050207010007	1" x 3/4"	36	32	19	10	1000	11
050207013005	1 1/4" x 1/2"	46	37	21	10	700	27
050207013007	1 1/4" x 3/4"	46	37	21	10	700	28
050207013010	1 1/4" x 1"	46	37	21	10	700	21
050207015005	1 1/2" x 1/2"	50	37	21	10	600	34
050207015007	1 1/2" x 3/4"	50	37	21	10	600	32
050207015010	1 1/2" x 1"	50	37	21	10	500	32
050207015013	1 1/2" x 1 1/4"	50	37	21	10	500	20
050207020005	2" x 1/2"	63	41	25	5	350	60
050207020007	2" x 3/4"	63	41	25	5	350	58
050207020010	2" x 1"	63	41	26	5	300	61
050207020013	2" x 1 1/4"	63	41	26	5	320	55
050207020015	2" x 1 1/2"	63	41	26	5	320	44
050207025020	2 1/2" x 2"	80	44	29	5	200	75
050207030010	3" x 1"	90	48	32	2	150	117
050207030013	3" x 1 1/4"	90	48	32	2	150	119
050207030015	3" x 1 1/2"	90	48	32	2	150	118
050207030020	3" x 2"	90	48	32	2	100	103
050207030025	3" x 2 1/2"	90	48	32	2	150	75
050207040020	4" x 2"	120	56	41	2	80	238
050207040030	4" x 3"	120	56	41	2	80	222

90° Threaded Tee

050407*

Te de 90° rosca hembra




Product Code	Size Rp	H	I2	UB	UC	W
050407005	1/2"	64	18	10	700	28
050407007	3/4"	68	19	10	500	39
050407010	1"	81	21	10	260	61
050407013	1 1/4"	96	25	5	140	114
050407015	1 1/2"	108	25	5	90	157
050407020	2"	130	30	5	60	205

* With reinforcing ring - Cat. No. 050417 | * Con anillo de refuerzo - Cat. No. 050417

90° Threaded Elbow

050507*

Codo de 90° rosca hembra




Product Code	Size Rp x Rp	A	I2	UB	UC	W
050507005	1/2" x 1/2"	32	17	10	1000	22
050507007	3/4" x 3/4"	35	18	10	700	30
050507010	1" x 1"	41	21	10	400	45
050507013	1 1/4" x 1 1/4"	48	25	10	200	87
050507015	1 1/2" x 1 1/2"	54	25	5	150	116
050507020	2" x 2"	65	30	5	80	157

* With reinforcing ring - Cat. No. 050517 | * Con anillo de refuerzo - Cat. No. 050517

90° Threaded Elbow Male x Female

051507

Codo roscado-macho x hembra




Product Code	Size R x Rp	A	A1	I	I1	UB	UC	W
051507005	1/2" x 1/2"	36	36	16	17	10	1000	17
051507007	3/4" x 3/4"	40	40	17	18	10	700	25
051507010	1" x 1"	45	47	19	21	10	400	40

Threaded Reducing Nipple

050605

Machón doble reductor

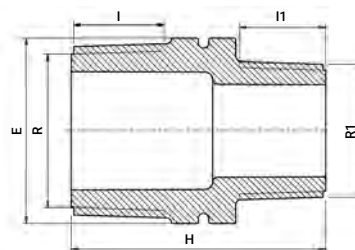


Product Code	Size R x R1	E	H	I	I1	UB	UC	W
050605007005	3/4" x 1/2"	27	47	17	16	10	1500	10
050605010005	1" x 1/2"	36	49	19	16	10	800	17
050605010007	1" x 3/4"	36	50	19	17	10	800	18
050605013005	1 1/4" x 1/2"	46	53	21	16	10	500	28
050605013007	1 1/4" x 3/4"	46	54	21	17	10	500	29
050605013010	1 1/4" x 1"	46	56	21	19	10	500	31
050605015005	1 1/2" x 1/2"	50	54	21	16	5	500	34
050605015007	1 1/2" x 3/4"	50	55	21	17	5	500	34
050605015010	1 1/2" x 1"	50	57	21	19	5	400	36
050605015013	1 1/2" x 1 1/4"	50	59	21	21	5	400	39
050605020005	2" x 1/2"	63	58	25	16	5	280	51
050605020007	2" x 3/4"	63	59	25	17	5	260	52
050605020010	2" x 1"	63	61	25	19	5	260	53
050605020013	2" x 1 1/4"	63	63	25	21	5	240	57
050605020015	2" x 1 1/2"	63	63	25	21	5	240	58

Threaded Nipple

050607

Machón doble

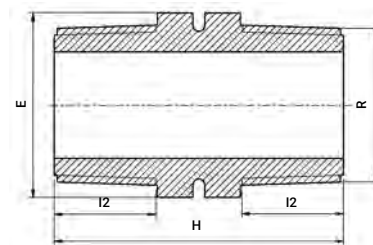


Product Code	Size R x R	E	H	I2	UB	UC	W
050607005	1/2" x 1/2"	22	47	17	10	2000	8
050607007	3/4" x 3/4"	27	49	18	10	1500	11
050607010	1" x 1"	36	55	20	10	800	23
050607013	1 1/4" x 1 1/4"	46	60	22	10	400	35
050607015	1 1/2" x 1 1/2"	50	61	22	5	300	48
050607020	2" x 2"	65	71	26	5	180	78

Threaded Cap

050707

Machón doble




Product Code	Size Rp	E	H	I2	UB	UC	W
050707005	1/2"	37	25	15	10	1600	13
050707007	3/4"	42	26	16	10	1500	14
050707010	1"	50	32	19	10	800	27
050707013	1 1/4"	59	34	22	10	500	39
050707015	1 1/2"	65	34	21	10	450	43
050707020	2"	80	39	25	5	250	78

Threaded Reducing Socket

051107

Manguito reductor rosca hembra - hembra

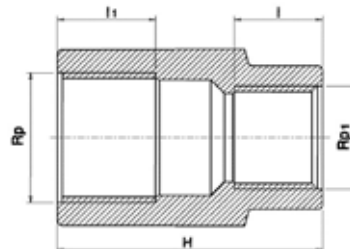


Product Code	Size Rp x Rp1	E	H	I	I1	UB	UC	W
051107007005	3/4" x 1/2"	36	50	20	19	10	800	24

Threaded Riser

051607

Espiga roscada




Product Code	Size R x R1	E	H	I2	UB	UC	W
051607005	1/2" x 1/2"	22	150	17	10	600	30
051607007005	3/4" x 1/2"	27	113	18	10	500	26
051607007	3/4" x 3/4"	27	150	18	10	400	43
051607010	1" x 1"	36	150	19	5	250	65
051607013	1 1/4" x 1 1/4"	46	150	21	5	150	93
051607015013	1 1/2" x 1 1/4"	50	150	21	5	140	120
051607015	1 1/2" x 1 1/2"	50	150	21	5	140	120

Threaded Plug

051707

Tapón rosca macho



Product Code	Size R	E	H	I2	UB	UC	W
051707003	3/8"	22	24	13	10	4500	4
051707005	1/2"	27	29	16	10	2000	8
051707007	3/4"	32	31	17	10	1500	12
051707010	1"	36	34	19	10	1000	16
051707013	1 1/4"	46	38	21	10	700	26
051707015	1 1/2"	55	39	21	10	500	38
051707020	2"	65	45	25	10	300	60

Ball Valve

03703

Válvula esférica



Product Code	Size DN x Rc	E	H	I	B	A1	A2	UC	W
0370300005	15 x 1/2"	53	97	17.5	36	27	54	72	180
0370300007	20 x 3/4"	53	97	17.5	36	27	54	72	175
0370300010	25 x 1"	64	116	20.5	46	33	64	72	313
0370300013	32 x 1 1/4"	73	118	20	55	36	70	48	393
0370300015**	40 x 1 1/2"	91	144	24	65	41	87	30	712
0370300020**	50 x 2"	106	162	29	75	53	95	24	918

* 037030F - with drain port | * 037030F – con sistema de purga


** Long handle

New ball valves can be found in page 227

PA Ball Valve Female x Male

NEW!

0370302

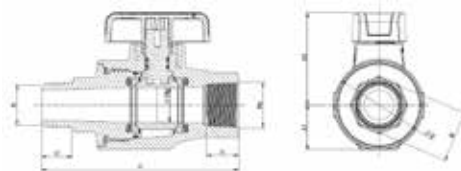


Product Code	Size RcxR	Rp	DN	A1	A2	H	I1	I2	B	E	UC	W
03703020S00005	1/2" x 1/2"	1/8"	20	27	54	114	18	17	27	53	72	190
03703020S00007	3/4" x 3/4"	1/8"	20	27	54	117	19	18	30	53	72	180
03703020S00010	1" x 1"	1/8"	25	33	64	133	22	21	41	64	72	320

* 03703020SF - with drain port | * 03703020SF – con sistema de purga

Threaded Stoptap (Seal NBR)

03405

Válvula de línea rosca hembra (juntas NBR)




Product Code	Size Rp x Rp	H	I2	A	UB	UC	W
03405077	3/4" x 3/4"	78	18	95	5	140	115
03405110	1" x 1"	82	20	95	5	120	129

Compression Stoptap (Seal NBR)

03407

Válvula de línea compresión (juntas NBR)



Product Code	Size d	E	H	I	A	UB	UC	W
03407020	20 x 20	48	147	47	87	5	100	168
03407025	25 x 25	54	154	49	87	5	80	190
03407032	32 x 32	64	174	57	87	5	60	260

Angle Seat Valve (Seal NBR) Threaded x Compression 03048/03948


Válvula de asiento angular - compresión - rosca macho - juntas NBR



Product Code	Size d x R	E	H	I	I2	A	UB	UC	W
03048200	20 x 1/2"	48	174	57	16	113	—	100	176
03048250	25 x 3/4"	54	187	60	18	121	—	80	238
03048320	32 x 1"	64	212	70	20	140	—	50	360
03948400	40 x 1 1/4"	82	299	84	22	180	—	26	605
03948505	50 x 1 1/2"	96	259	93	22	207	—	17	924
03948630	63 x 2"	113	340	110	26	246	—	10	1518

Angle Seat Valve (Seal NBR) Threaded Inlet & Outlet 03047*

Válvula de asiento angular, (sello NBR) roscas macho




Product Code	Size R x R	H	I2	A	UB	UC	W
03047055	1/2" x 1/2"	135	16	113	5	120	142
03047077	3/4" x 3/4"	151	18	121	5	100	186
03047110	1" x 1"	170	20	140	—	70	291
03047188	1 1/4" x 1 1/4"	225	22	207	—	40	474
03047155	1 1/2" x 1 1/2"	200	22	180	—	24	733
03047220	2" x 2"	254	26	246	—	15	1191

* Available with NPT thread | * Disponible con rosca NPT

Angle Seat Valve (Seal FPM) Threaded Inlet & Outlet

03049*

Válvula de asiento angular, (sello FPM) roscas macho




Product Code	Size R x R	H	I2	A	UB	UC	W
03049055	1/2" x 1/2"	135	16	113	5	120	136
03049077	3/4" x 3/4"	151	18	121	5	100	191
03049110	1" x 1"	170	20	140	—	70	295
03049188	1 1/4" x 1 1/4"	200	22	180	—	40	474
03049155	1 1/2" x 1 1/2"	225	22	207	—	24	733
03049220	2" x 2"	254	26	246	—	15	1207

* Available with NPT thread | * Disponible con rosca NPT

Angle Seat Valve (Seal NBR) Compression Inlet & Outlet

03046

Válvula de asiento angular, (sello NBR) compresión




Product Code	Size d x d	E	H	I	A	UB	UC	W
03046320	32 x 32	64	254	70	140	—	40	438

Check Valve (Seal EPDM) Threaded Inlet & Outlet

03067/03068*

Válvula antirretorno, (sello EPDM) roscas macho

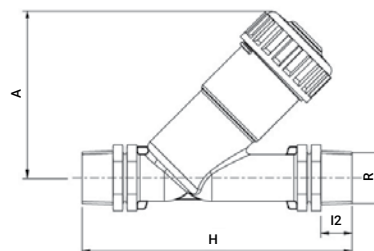


Product Code	Size R	H	I2	A	UB	UC	W
03067077	3/4" x 3/4"	151	18	96	5	140	141
03067110	1" x 1"	170	20	106	5	100	210
03067188	1 1/4" x 1 1/4"	200	22	134	—	55	382
03067155	1 1/2" x 1 1/2"	225	22	155	—	35	586
03067220	2" x 2"	254	26	182	—	20	975

* Available with NPT thread | * Disponible con rosca NPT

Fixed Ratio Pressure Reducing Valve

03801

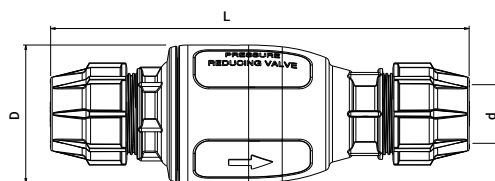


Product Code	pressure reducing ratio	Size d	D	L	UB	UC	W
03801200630A	2:1	63*	150	450	—	6	3035
03801300630A	3:1	63*	150	450	—	6	3035
03801201100A	2:1	110	245	770	1	1	15500
03801301100A	3:1	110	245	770	1	1	15500

* For 2" male R use threaded adaptor 0725060630200A

Universal Pressure Regulator UPR 550

0220

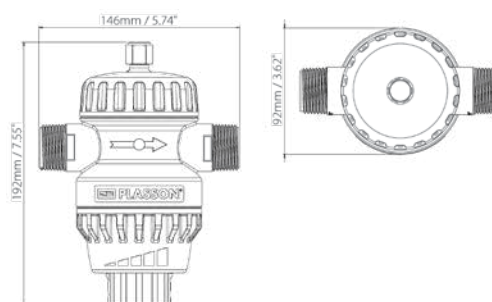


Product Code	Inlet/Outlet	Inlet Pressure	Outlet Pressure	UB	UC	W
02206500	1" R	0.5-16 bar	0.5-4.0 bar	—	30	700
02205950	1" NPT	0.5-16 bar	0.5-4.0 bar	—	30	700

Quick Coupling Valve (Seal NBR)

03039

Válvula de acople rápido (juntas NBR)




Product Code	Size R	H	I2	UB	UC	W
03039037	3/4"	152	17	5	130	146
03039030	1"	154	18	5	130	148

Key for Quick Coupling Valve 3039

03139

Conexión de acople rápido


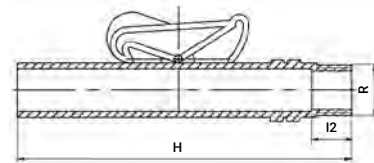


Product Code	Size R	H	I2	UB	UC	W
03139020	3/4"	173	18	5	250	66

Check Valve Insert

03226/03227

Válvula de antirretorno

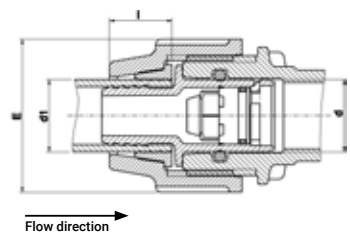


Product Code	Size d x d1	E	I	UB	UC	W
03226025	25 x 25	63	22	—	800	15

Male Rc thread to G threaded Free Nut

03589

Tubo y tuerca BSPT




Product Code	Size G x R	E	H	I2	UB	UC	W
0358906005	3/4" x 1/2"	40	56	16	2	150	60
0358906007	1" x 3/4"	48	61	16	2	150	92

Water Meter Seat

03510T

Soporte para control de flujo de agua

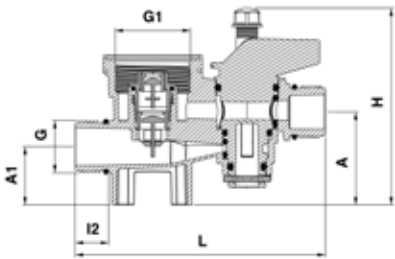


Product Code	Size G x G1 x G	L	I2	A	A1	H	UC	W
03510TT010010	1"x1½"x1"	160	21	59	37	130	60	270

Water Meter Manifold

035100

Soporte para control de flujo de agua

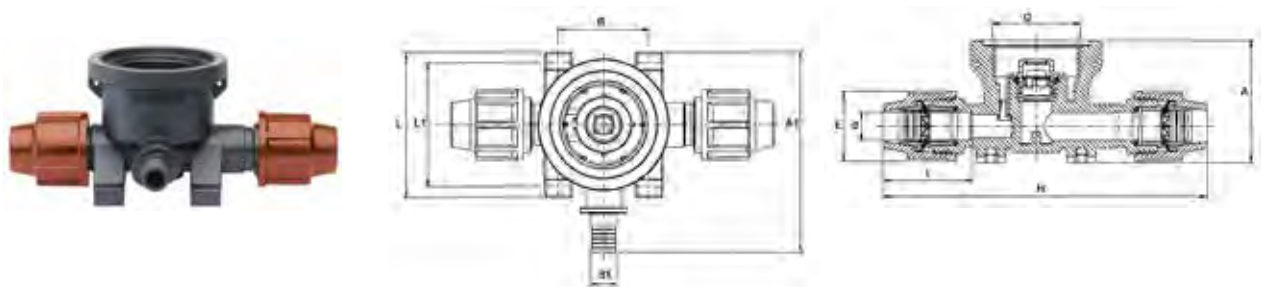


Product Code	Size d x G1 x d	H	I	E	A	A1	L	L1	B	d1	UC	W
03510000	15 x 1 1/2" x 15	178	49	39	67	110	80	68	50	14	80	100

PP Ball Valve

036010

PP Válvula de esfera

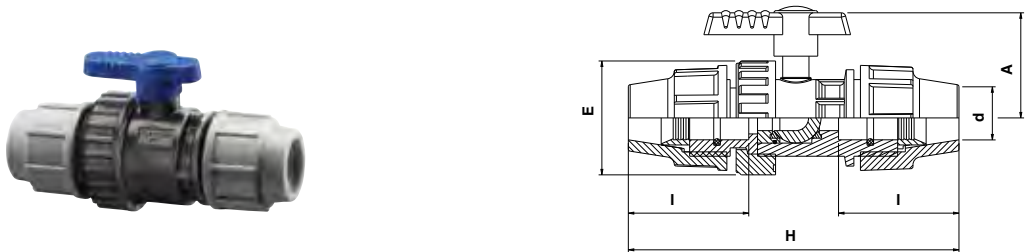


Product Code	Size d	E	H	I	A	UB	UC	W
036010020	20	52	151	55	48	—	—	150
036010025	25	60	160	55	60	—	—	200
036010032	32	78	186	62	70	—	—	350

PP Ball Valve Male Adaptor

036020

PP Válvula de esfera rosca macho

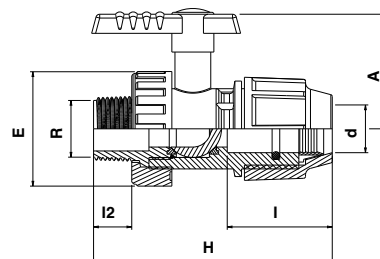


Product Code	Size d x R	E	H	I	I2	A	UB	UC	W
036020020005	20 x 1/2"	52	113	55	17	48	—	—	120
036020025007	25 x 3/4"	60	123	55	18	60	—	—	160
036020025010	25 x 1"	60	125	62	20	60	—	—	167
036020032010	32 x 1"	78	144	62	20	70	—	—	280

PP Ball Valve Female Adaptor

036030

PP Válvula de esfera rosca hembra

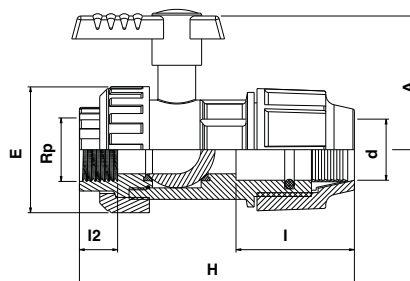


Product Code	Size d x Rp	E	H	I	I2	A	UB	UC	W
036030020005	20 x 1/2"	52	113	55	17	48	—	—	120
036030025007	25 x 3/4"	60	123	55	18	60	—	—	160
036030032010	32 x 1"	78	144	62	20	70	—	—	280
036030032013	32 x 1 1/4"	78	144	62	23	70	—	—	280

Quarter Turn Valve Male Threaded x Compression

03010

Rosca Macho/ Compresión




Product Code	Size d x R	L	A	E	I	I1	UB	UC	W
03010516	16 x 1/2"	98	49	34	17	15	10	450	68
03010716	16 x 3/4"	99	49	34	17	17	10	400	72

Quarter Turn Valve Male Threaded x Female Threaded

03012

Rosca Macho-/Rosca Hembra




Product Code	Size G x R	H	A	I1	I2	UB	UC	W
03012055	1/2" x 1/2"	89	49	15	14	10	450	46
03012077	3/4" x 3/4"	97	49	17	18	10	400	73

Quarter Turn Valve Compression x Compression

03017

Compresión

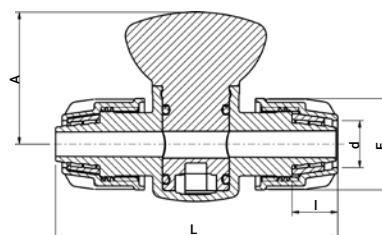

Product Code	Size d x d	L	A	E	I	UB	UC	W
03017016	16 x 16	105	49	34	17	10	350	70

Technical Specifications and Installation Instructions

Technical Specifications

Materials

Compression Fittings

Body: Polypropylene, high-grade copolymer.
 Nut: Polypropylene, high-grade copolymer.
 Split Ring: Acetal POM (CPVC also available).
 Liner: Acetal (POM).
 Seal: Nitrile rubber NBR (EPDM, FPM also available).
 Reinforcing ring: Stainless steel on all female offtakes from 1 1/4" up to 4".
 Bolts (Series 17): Plated steel.
 Nuts (Series 17): Stainless steel.

Valves

Body: Polypropylene, high-grade copolymer.
 O-Ring: See inside.
 Spring: (items 03067, 03039), Stainless steel.

Saddles

Body: Polypropylene, high-grade copolymer.
 Bolts and Nuts: Plated steel.
 (Stainless steel bolts and nuts also available)
 Reinforcing Rings: Stainless steel.
 Seal: Nitrile rubber (NBR).

Tappers + Compression Saddles Body: Polypropylene, high-grade copolymer.
 Split Rings: Acetal (POM, CPVC also available).
 Nuts: Polypropylene, high-grade copolymer.
 Bolts and Nuts: Stainless Steel.
 Seal: EPDM.

Threaded Fittings

Body: Polypropylene, high-grade copolymer.
 Reinforcing Ring: Stainless Steel.

Operating Temperatures

The fittings and valves are not to be used with hot water, although they withstand the same temperature as the polyethylene pipe itself. The fittings and valves will withstand sub-zero temperatures.

Chemical Resistance

PLASSON Fittings are supplied, as standard, with polyacetal split rings and NBR O-rings which are suitable for water. For aggressive chemical applications CPVC split rings and EPDM or FPM O-rings can be supplied to produce a better chemical resistance.

Operating Pressures and Quality Certificates

PLASSON Fittings are tested and approved according to ISO 17885 for water (replaced ISO 14236) and AS/NZ 4129. For detailed pressure classification see page 84.

Threads

Threads marked "R", "Rp" and "Rc" are according to ISO 7-1. Threads marked "G" are according to ISO 228.

Flanges

Flange dimensions in accordance with: ISO 7005-1 (TABLE 11),
 BS 4504: 1989 (TABLE 11),
 DIN 2501 (PN 16 TABLE), AS/NZS 4331. Metal backing rings to be used with all flanges.

Legend	
UB	Units par bag
UC	Units per carton
W	Weight in grams

Note

Before installation ensure that the end of the pipe to be inserted into the fitting is free of scratches and other imperfections and that both the pipe and the fitting itself are clean of sand, mud, stones etc.

Do not over tighten nut when closing. Never use wrenches or spanners with handle lengths longer than 46 cm - excessive torque during tightening can spread nut cone and result in pull outs.

If fittings are reused, ensure split ring is sharp and bites into pipe to avoid pull outs. Alternatively replace split ring.

Pull out resistance of Series 7 fittings combined with the UPVC/PP grip ring has been approved by pressure testing UPVC/PP pipe assemblies at 25 bar operating pressure for at least 1 hour.

Note: We strongly recommend the use of PTFE tape in threaded connections.

Especificaciones Técnicas

Materiales

Accesorios de compresión

Cuerpo: Polipropileno, block copolímero de alta calidad.
Racor: Polipropileno, block copolímero de alta calidad.
Casquillo de apriete: Acetal (POM).
Disponibles también en PVC-C.
Refuerzo interno de tubos: Acetal (POM).
Junta tórica: Nitrilo (NBR).
disponibles también en EPDM y FPM
Anillo de refuerzo: Acero inoxidable en todas las
tomas roscadas hembra de 1 1/4" a 4".
Tornillos (Series 17): Acero niquelado.
Tuercas: Acero inoxidable.

Válvulas

Cuerpo: Polipropileno, block copolímero de alta calidad.
Junta tórica: Ver catálogo.
Resorte: (03067, 03039), Acero inoxidable.

Collarines

Cuerpo: Polipropileno, block copolímero de alta calidad.
Tornillos y tuercas: Acero niquelado.
(También se dispone de tornillos y tuercas de acero
inoxidable)
Anillo de refuerzo: Acero inoxidable.
Juntas: NBR.

Tapper y Collarin de compresión

Cuerpo: Polipropileno, block copolímero de alta calidad.
Casquillo de apriete: Acetal (POM).
disponibles también en PVC -C
Racor: Polipropileno, block copolímero de alta calidad.
Tornillos y tuercas: Acero inoxidable.
Juntas: EPDM.

Accesorios roscados

Cuerpo: Polipropileno, block copolímero de alta calidad.
Anillo de refuerzo: Acero inoxidable.

Temperaturas de Trabajo

Los accesorios y las válvulas no son recomendados para
usar con agua caliente, aunque soportan las mismas
temperaturas que las propias tuberías de polietileno.
Sin embargo pueden resistir temperaturas inferiores a los
cero grados centígrados.

Resistencia a las Sustancias Químicas

Los accesorios PLASSON están provistos, como estándar,
con Casquillos de Apriete de resina acetálica y Juntas tóricas
de NBR, recomendados para usar con agua potable. Para las
aplicaciones de productos químicos agresivos se ofrecen
Casquillos de Apriete de CPVC y Juntas tóricas de EPDM
o FPM, que resisten mejor a las sustancias químicas.

Presiones de Funcionamiento y Certificados de Calidad

Todos los accesorios de PLASSON se someten a pruebas de
aprobación, de conformidad con las normativas ISO 17885
- Agua (Reemplaza a la ISO 14236) y AS/NZ 4129. Para ver
una clasificación detallada de las presiones, consulte la
página 85.

Roscas

Roscas marcadas "R", "Rp" y "Rc" de conformidad con la
normativa ISO 7-1.
Roscas "G" de conformidad con la normativa ISO 228.

Bridas

Las dimensiones de las bridas responden a las normas
ISO 7005-1 (TABLE 11),
BS 4504: 1989 (TABLE 11),
DIN 2501 (PN 16 TABLE), AS/NZS 4331
Con todas las bridas debe ser utilizado como refuerzo una
brida de metal.

Legend	
UB	Unidades por bolsa
UC	Unidades por carton
W	Peso en gramos

Nota

Antes de la instalación asegure que:
El extremo del tubo introducido no tenga imperfecciones o
rayaduras Tanto el tubo como el accesorio no tenga sobre
los mismos arena, barro o piedras, etc. No cierre el racor con
extremada fuerza, nunca use llaves con manijas mas largas
de 46 cm. Un excesivo momento de torsion durante el cierre
puede dañar el cono del racor y como resultado del mismo
no permitir su propio funcionamiento Si los accesorios son
usados nuevamente despues de su desarmado, constate que
los dientes del casquillo de apriete permanecen afilados y se
hincan en el tubo impidiendo el escape del tubo. Si no es así,
cambie el casquillo de apriete.

La resistencia a tracción de accesorios de Serie 7 que
combinan el uso de casquillo de apriete para tubos de UPVC
/ PP ha sido aprobada por medio de pruebas de presión para
tubos UPVC / PP con una presión de operación de 25 bar
durante al menos 1 hora

Nota: Recomendamos utilizar cinta de PTFE para sellar todas
las conecciones roscadas.

Technical Specifications

Pressure Rating of PLASSON Mechanical Fittings and Valves

Product Code	Body Type	Pressure Rating	Stainless Steel Reinforcement Ring	From Pipe Diameter	To Pipe Diameter	From Thread	To Thread	From Outlet Size	To Outlet Size
line 7/87 compression fittings									
Starts with 07 and 87	All Fitting Types	16.0							
Exceptions:									
Starts with 07	All 160 mm Fittings	10.0							
Starts with 07 and 87	All Fittings with 3 inch Female Thread	10.0							
Starts with 07 and 87	All Fittings with 4 inch Female Thread	6.0							
0701070/ 0705070	Plass 4 (Universal)	10.0		50	50			35	50
0704P	90° Slip Tee	12.5		40	63				
07120	Plug Adaptor	12.5		20	63				
07220	Compression Flange Adaptor	12.5		125	125				
07250	Threaded Adaptor	12.5		75	75	1 1/2	3		
07640	45° Tee	8.0		63	63				
87640	45° Tee	8.0		75	110				
87930	Reducing Set 110X63	10.0							
Valves									
03046/03047/03048/03049	Angle Seat Valve	8.0							
03405	Threaded Stoptap	10.0				3/4	1		
03407	Compression Stoptap	16.0		20	32				
03039	Quick Coupling Valve	10.0				3/4	1		
03067	Check Valve	8.0							
03703	PA ball valve	16.0							
0360	PP ball valve	16.0							
line 5 threaded fittings									
Starts with 05	All fittings	16.0							
Exceptions									
0501/0504/0505	socket /elbow /Tee without reinforcment ring	10.0	NO			1 1/4	2		
050207/ 050707	Threaded Reducing Bushing/Threaded Cap	10.0				1 1/4	2		
Saddles									
160760	Saddle Single Outlet	12.5	YES	20	63	1/2	1 1/2		
160760	Saddle Single Outlet	12.5	YES	75	180	1/2	3/4		
160760	Saddle Single Outlet	10.0	YES	75	180	1	2		
160761	Saddle Single Outlet	16.0	YES	40	180	1	1		
160860	Saddle Single Outlet	6.0	NO	20	180	1 1/4	2		
160860	Saddle Single Outlet	10.0	NO	20	180	1/2	1		
161760	Saddle Double Outlet	12.5	YES	20	63	1/2	1 1/2		
161760	Saddle Double Outlet	12.5	YES	75	180	1/2	3/4		
161760	Saddle Double Outlet	10.0	YES	75	180	1	2		
161860	Saddle Double Outlet	6.0	NO	20	180	1 1/4	2		
161860	Saddle Double Outlet	10.0	NO	20	180	1/2	1		
16279	Saddle Single Outlet	16.0	YES	63	180	1 1/2	1 1/2		
16310,16300,1631R	PLASSADDLE	16.0							
Silver line compression fittings									
starts with 14	All fittings	10.0							
Series 1 compression fittings									
starts with 10	All fittings	16.0							

Especificaciones Técnicas

Presiones Nominales (PN) de Accesorios y Válvulas Mecánicas / Compresión de PLASSON

Código de producto	Tipo	Presión Nominal	Anillo de Refuerzo de Acero Inoxidable	From Pipe Diameter	To Pipe Diameter	From Thread	To Thread	From Outlet Size	To Outlet Size
Accesorios de Compresión Serie 7 / 87									
Starts with 07 and 87	All Fitting Types	16.0							
Exceptions:									
Starts with 07	All 160 mm Fittings	10.0							
Starts with 07 and 87	All Fittings with 3 inch Female Thread	10.0							
Starts with 07 and 87	All Fittings with 4 inch Female Thread	6.0							
0701070/ 0705070	Plass 4 (Universal)	10.0		50	50			35	50
0704P	90° Slip Tee	12.5		40	63				
07120	Plug Adaptor	12.5		20	63				
07220	Compression Flange Adaptor	12.5		125	125				
07250	Threaded Adaptor	12.5		75	75	1 1/2	3		
07640	45° Tee	8.0		63	110				
87930	Reducing Set 110X63	10.0							
Válvulas									
03046/03047/03048/03049	Angle Seat Valve	8.0							
03405	Threaded Stoptap	10.0				3/4	1		
03407	Compression Stoptap	16.0		20	32				
03039	Quick Coupling Valve	10.0				3/4	1		
03067	Check Valve	8.0							
03703	PA ball valve	16.0							
0360	PP ball valve	16.0							
Accesorios Roscados Línea 5									
Starts with 05	All fittings	16.0							
Excepciones									
0501/0504/0505	socket /elbow /Tee without reinforcement ring	10.0	NO			1 1/4	2		
050207/ 050707	Threaded Reducing Bushing/Threaded Cap	10.0				1 1/4	2		
Collarines/ Arranques/ Tomas simples									
160760	Saddle Single Outlet	12.5	YES	20	63	1/2	1 1/2		
160760	Saddle Single Outlet	12.5	YES	75	180	1/2	3/4		
160760	Saddle Single Outlet	10.0	YES	75	180	1	2		
160761	Saddle Single Outlet	16.0	YES	40	180	1	1		
160860	Saddle Single Outlet	6.0	NO	20	180	1 1/4	2		
160860	Saddle Single Outlet	10.0	NO	20	180	1/2	1		
161760	Saddle Double Outlet	12.5	YES	20	63	1/2	1 1/2		
161760	Saddle Double Outlet	12.5	YES	75	180	1/2	3/4		
161760	Saddle Double Outlet	10.0	YES	75	180	1	2		
161860	Saddle Double Outlet	6.0	NO	20	180	1 1/4	2		
161860	Saddle Double Outlet	10.0	NO	20	180	1/2	1		
16279	Saddle Single Outlet	16.0	YES	63	180	1 1/2	1 1/2		
16540	All Tappers - for PVC & PE Pipes	16.0							
Línea Silver – Accesorios de Compresión									
starts with 14	All fittings	10.0							
Serie1 – Accesorios de Compresión									
starts with 10	All fittings	16.0							


Installation Instructions for Compression Fittings

ASSEMBLY AS SIMPLE AS ABC...

For Fittings 16mm - 63mm / Para accesorios de 16mm - 63mm

Cut the pipe square, remove burrs • Undo the nut to the last thread. Leave the nut on the fitting while inserting the pipe.

Corte el tubo al tamaño requerido y realice el biselado al final del tubo • Retire el racor hasta su última rosca dejándolo en el accesorio durante el próximo paso.

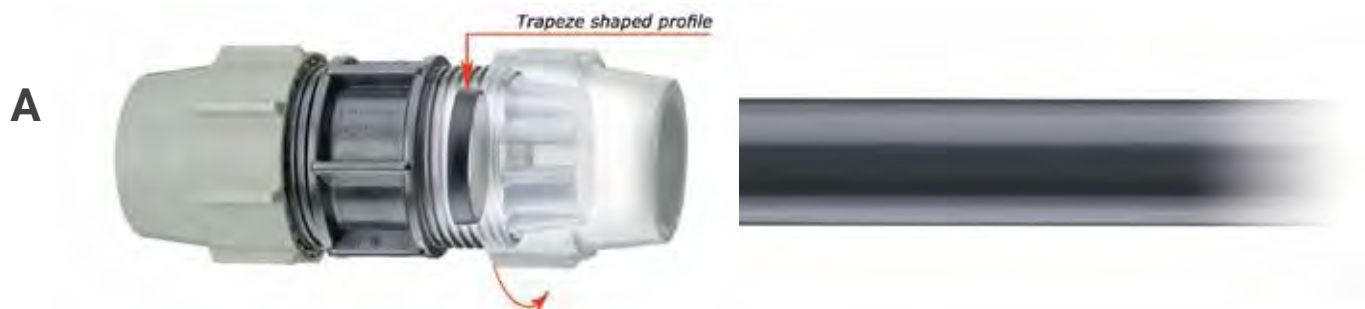

Twist the pipe into the fitting* through the split ring and rubber seal to the pipe stop • Tighten the nut firmly. Use a PLASSON wrench (or similar tool) for final tightening of sizes 40 and above.

Introduzca el tubo con un movimiento circular dentro del accesorio pasando el casquillo de apriete y el sello hasta llegar al tope interno del accesorio • Gire firmemente el racor en dirección del cuerpo del accesorio, utilizando la llave PLASSON (o similar) en los tamaños 40mm y mayores.



The nut should be closed tightly, however there is no need for the nut to actually meet the body shoulder.

Cierre el racor firmemente, aunque no es necesario cerrarlo hasta el tope.



* Lubrication and chamfering of the pipe end will ease insertion of the pipe (use silicone lubricant).

* A fin de facilitar la introducción es conveniente lubricar y biselar el tubo (con un lubricante que conforma las normas de aprobación de calidad del agua).

Installation Instructions for Compression Fittings

ASSEMBLY AS SIMPLE AS ABC...

For Fittings 75mm - 110mm / Para accesorios de 75mm - 110mm
Cut the pipe square, remove burrs

Undo the nut until 3-4 threads are visible.

Abra el racor hasta que se vean 3-4 roscas.
Corte el tubo en escuadra y quite las virutas del corte

A



Insert the pipe into the fitting until the stop.

Introduzca el tubo hasta que éste llegue a tocar perpendicularmente el cuerpo del accesorio.

B



Tighten the nut firmly with a PLASSON wrench.

Cierre firmemente el racor con la llave PLASSON.

C



Installation Instructions for Pipe Adaptors Conversion Sets

Universal Pipe Adaptors: Copper, Galvanised and Imperial U-PVC (Without Pullout Resistance)

Juegos de conversión de tubería: galvanizada, de cobre o de UPVC medidas imperiales (sin resistencia a la tracción)



Prepare pipe by ensuring that the end is free from grease and roughen the outer surface with wire wool or similar. Cut pipe end square. Remove nut from end of fitting and discard white split ring.



Push adaptor into fitting to the stop. Push and twist the pipe until it meets the internal stop.



Screw nut tightly towards the body of the fitting. Final tightening with a wrench is essential. The installation should be firmly anchored against end loading.

Se prepara el tubo asegurándose que el final del tubo no tenga grasa, y se lija el exterior con lana de alambre. Se hace un corte perpendicular al final del tubo. Se lleva el racor al final del accesorio y se quita el casquillo de apriete blanco.

Se empuja el adaptador en el tubo hasta el tope se empuja y se enrosca el tubo hasta que llegue al tope interior del accesorio.

Se aprieta firmemente el racor hacia el interior del accesorio. Es imprescindible que se apriete con una llave. Después, anclar firmemente la instalación.

Installation Instructions for Pipe Adaptors Conversion Sets

Adaptor Set for Copper (With Pullout Resistance) Juego de adaptadores para cobre (con resistencia a traccion)



Cut pipe square. Remove burrs. Ensure pipe is free of scratches, dents and other imperfections. Remove nut from fitting and discard white split ring. Make a mark on the pipe to the depth of the rubber insert. Assemble nut, brown ring and stainless steel ring onto pipe in that order. Ensure the brown ring tapers towards the nut and the stainless steel ring towards the fitting body.



Push insert into fitting body fully up to the flange.



Push pipe end into body of fitting. Ensure to insert at least to the mark you have made. Push both the rings up to the insert flange and engage nut. Use a PLASSON wrench for final tightening.

Corte el tubo a escuadra, limpie los restos del corte. Asegure que el tubo no este rayado, dentado, con virutas o con otras imperfecciones. Se lleva el racor hasta el final del accesorio y se quita el casquillo de apriete blanco. Se hace una marca en la superficie del tubo que es la profundidad del adaptador de goma. Se colocan el racor, el anillo marrón y el anillo de acero en el tubo, en este orden. Se comprueba que el anillo marrón se remata hacia la tuerca y el anillo de acero hacia el interior del accesorio.

Introducir el adaptador en el interior del accesorio hasta el final.

Introducir el tubo en el interior del accesorio. Comprobar que se introduce por lo menos hasta la marca hecha previamente. Se empujan ambos anillos hasta el adaptador de goma y se cierra firmemente el racor. Para apretar firmemente se debe utilizar la llave PLASSON.

Installation Instructions for Pipe Adaptors Conversion Sets

Lead Pipe Adaptor Adaptadores para tuberías de plomo



Remove nut from fitting and discard white split ring. Mount nut on pipe followed by brown split ring and seal ring.



Push both components onto the pipe until the seal ring is 20mm from the end of pipe and touching the split ring.



Enter pipe into fitting body and tighten firmly with a wrench. (It is important that the pipe is not pushed fully to the stop in the fitting).

Note for lead pipe adaptors: This product seals on the outside diameter of the pipe and it is therefore important that the lead pipe is in good condition on the external part of the pipe where the seal is made. Variation in the lead piping sometimes results in oversized pipes. In these circumstances it may be preferable to use the white split ring provided with the fitting.

Se lleva el racor al final del accesorio y se quita el casquillo de apriete blanco. Se monta el racor al tubo seguido por el casquillo marrón y el anillo de goma.

Se empujan los dos componentes hasta que el anillo de goma esté a 20mm del final del tubo, y tocando el casquillo de apriete marrón.

Se introduce el tubo en el interior del accesorio y se aprieta firmemente con una llave (es importante que no se empuje el racor completamente hasta el final del accesorio).

Nota: El sellado con este producto se realiza con el diámetro exterior del tubo, y por lo tanto es importante que el exterior de la tubería de plomo esté en buen estado. Los variaciones en la tubería de plomo resultan a veces demasiado grandes. En estas circunstancias es preferible usar el casquillo de apriete que está previsto con el accesorio.

Installation Instructions for PLASS4 (Universal) Fittings



Instrucciones para la instalacion de accesorios plass4

Cut the pipe square and remove all burrs and sharp edges.

Select correct fitting according to the external diameter of the pipe.

Slide the PLASS4 fitting (universal side) onto the pipe, until it reaches the internal fins and a slight resistance is felt.

Do not force the pipe end past the fins.

Holding the PLASS4 body with a wrench, tighten the PLASS4 universal nut firmly with a wrench (size 35-50 tighten nut very firmly to approx. 90 NM)

Assemble the metric PE joint as per the standard fitting instructions.

Note: If reusing the fitting, ensure the metal teeth are located in the grip ring and pipe end does not pass the location fins in the body.

Corte el tubo a escuadra y elimine todas las virutas y cantos vivos.

Elija el accesorio apropiado de acuerdo con el diámetro del tubo.

Introduzca el accesorio PLASS4 (del lado Universal) en el tubo hasta que llegue al tope s sienta una ligera resistencia.

No fuerce el tubo y no pase las aletas.

Agarrando el cuerpo del PLASS4 con una llave apropiada, cierre firmamente el raccor con una llave (en las medidas 35-50 su raccor puede ser cerrado con un momento de 90 Nm). Arme la union de PE como en las instrucciones de los accesorios normales.

IMPORTANTE: no fuerce el tubo y pase el punto de resistencia. Puede danar el el accesorio.

Comience apretar la tuerca al cuerpo. el cierre final hagalo con una llave PLASSON o similar. Ensamble la junta metrica como las instrucciones de un accesorio estandard.

Installation Instructions for Copper Pipe Adaptor



Instrucciones para la instalacion de adaptor tubo de cobre

Cut the copper pipe square and remove all burrs and sharp edges.

Twist the copper pipe into the fitting* through the rubber o-ring to the pipe stop.

Tighten the nut firmly. Use a wrench for final tightening. The nut should be closed tightly, however there is no need for the nut to actually meet the body shoulder.

Assemble the metric PE joint as per the standard fitting instructions.

* Lubrication of the pipe end will ease the insertion (use silicone lubricant).

Note: If reused, the metal grip ring must be replaced with a new one.

Corte el tubo a escuadra y elimine todas las virutas y cantos vivos.

Introduzca girando* el tubo de cobre junto con el o-ring hasta el tope.

Apriete la tuerca firmemente. use una llave para el apriete final. La tuerca debe estar apretada hermeticamente. Sin embargo no es necesario que llegue hasta el borde del cuerpo.

Ensamble la junta metrica pe como un accesorio estandard.

* Para facilitar la introduccion utilice un lubricante a base de silicona.

NOTA: Si quiere reusar el accesorio debe reemplazar el agarre de metal por uno nuevo.



ELECTROFUSION FITTINGS

Introduction Introducción

Electrofusion System	96	Sistema ElectroFusión	97
Table of Contents	98 - 102	Indice	98 - 102
Fittings	103 - 156	Accesorios	103 - 156
Wastewater Line	157 - 162	Aguas residuales	157 - 162
Technical Specifications	163	Especificaciones técnicas	164

PLASSON, a worldwide leader in fittings for polyethylene pipes for over 50 years, now offers a complete line of electrofusion products including: PLASSON electrofusion fittings, tools and control boxes.

PLASSON electrofusion products combine to offer a reliable smart-system solution featuring fully computerized control and monitoring.

PLASSON's customers benefit from the Company's quality products, expertise and worldwide first-rate service in water, gas distribution, Waste-Water Systems, Geothermal applications and industrial applications.

PLASSON, líder mundial en accesorios para tuberías de polietileno desde hace más de 50 años, presenta ahora una línea completa de productos de electrofusión, entre ellos: conectores, herramientas y soldadoras automáticas de electroFusión. La combinación de productos electrofusion de PLASSON ofrece una solución inteligente y confiable que integra el control y la monitorización completamente computarizados.

Los clientes de PLASSON se benefician de los productos de calidad, la pericia y el excelente servicio mundial de la compañía en instalaciones de distribución de agua y gas, y aplicaciones industriales.

Subsidiary Companies Subsidiarias

Australia

PLASSON Australia (PTY) Ltd.
E-mail: info@plasson.com.au
www.plasson.com.au

Brasil

PLASSON Do Brasil
E-mail: plasson@plasson.com.br
www.plasson.com.br

France

PLASSON France S.A.
E-mail: commercial@plassonfrance.fr
www.plasson.fr

Germany

PLASSON GmbH
E-mail: info@plasson.de
www.plasson.de

Italy

PLASSON Italia
E-mail: info@plasson.it
www.plasson.it

Poland

PLASSON Polska Sp.z o.o.
E-mail: bs@plasson.pl
www.plasson.pl

South Africa

PLASSON SA Pty Ltd, t/a PPA
E-mail: support@ppa.co.za
www.ppa.co.za

Spain

PLASSON Spain S.L.
E-mail: plasson@plasson.es
www.plasson.es

United Kingdom

PLASSON UK Ltd.
E-mail: miro@plasson.co.uk
www.plasson.co.uk

USA

PLASSON USA
E-mail: sales@plassonusa.com
www.plassonusa.com

Romania

PLASSON Romania (BSR)
E-mail: contact@bsr.ro
www.plasson.ro

PLASSON Electrofusion System

The Smart-System Solution You Can Depend On

PLASSON Electrofusion Fittings

PLASSON fittings are specifically designed for reliable, high performance pipe joining and long system life. This automated system has been proven to be most economical due to the low potential for operator error.

Tools and Control Box

PLASSON offers quality tools and control boxes allowing for easy installation. PLASSON control boxes provide computerized electrofusion with minimal potential for operator error. The PLASSON control boxes are the economical solution for reliable electrofusion.

The Smart Fuse System - PLASSON Electrofusion

All PLASSON products combine to form the latest state-of-the-art high performance pipe joining solution. PLASSON electrofusion fittings are part of a complete electrofusion Smart Fuse System. The entire electrofusion process is executed and fully monitored by the computerized control box. Everything is computer-controlled ensuring safe, dependable connections.

PLASSON electrofusion fittings can be used with PLASSON's computerized Smart Fuse System control box or with standard barcode systems. Each PLASSON electrofusion fitting comes complete with a barcode.

Advantages

Stronger pipe joining - PLASSON electrofusion quality fittings have long penetration depths and fusion zones which ensure high quality joints.

Most Economical - Economic benefits are a result of overall integrated system quality and innovation including the computerized Smart Fuse System which reduces the potential for operator error.

PLASSON Electrofusion Smart Fuse System Features

- **Superior Fitting Design**
increases joint integrity
- **Automatic Controller**
decreases potential operator error
- **Computerized Data Retrieval**
ensures quality control by Joint Data retrieval of measurements and records
- **Compatibility**
between PLASSON electrofusion and other electrofusion systems through the computerized barcode system
- **Easy Installation**
using PLASSON's simple, practical tools
- **High Standards**
are ensured by the latest product testing methods

High Performance - Proven high performance in gas and water distribution and industrial applications.

Superior Service - PLASSON provides unmatched service based on over 40 years in the field.

Sistema Electrofusion de PLASSON

La solución inteligente de confianza

Accesorios Electrofusion de PLASSON

Los accesorios ("fittings") de PLASSON para tuberías han sido especialmente diseñados para asegurar conexiones fiables, de alto rendimiento y prolongada vida útil. Se ha comprobado que este sistema automatizado es el más económico, gracias a la escasa probabilidad de errores por parte del operador.

Herramientas y soldadora automática de ElectroFusión

PLASSON ofrece herramientas de alta calidad y soldadoras automáticas que se instalan fácilmente. Las soldadoras, que proporcionan un proceso computarizado con mínima probabilidad de error humano, son la solución más económica para una electrofusión de máxima confianza.

Electrofusion de PLASSON - El sistema inteligente

Los productos de PLASSON se combinan para ofrecer la solución más avanzada y rendidora en la conexión de tuberías. Los accesorios electrofusion de PLASSON forman parte de un sistema completo e inteligente. La soldadora automática de ElectroFusión está a cargo de la ejecución y la monitorización del proceso. El sistema controlado por computadora asegura conexiones seguras y confiables.

Ventajas

Uniones más resistentes - Los accesorios de alta calidad electrofusion de PLASSON tienen grandes profundidades de penetración y zonas de fusión que aseguran juntas muy resistentes.

La solución más económica - El beneficio económico es el resultado de la calidad y la innovación del sistema computarizado totalmente integrado, que reduce la probabilidad de error humano.

Características del sistema inteligente Electrofusion de PLASSON

- **Excelente diseño**
asegura la integridad de la conexión
- **Control automático**
reduce la probabilidad de error humano
- **Recuperación de datos**
calidad asegurada mediante la recuperación de datos de mediciones y registros
- **Compatibilidad**
con el sistema electrofusion de PLASSON y otros sistemas de códigos de barras
- **Instalación sencilla**
mediante las herramientas prácticas y simples de PLASSON
- **Estándar elevado**
asegurado por los métodos de prueba de productos de última generación

Alta performance - Elevado rendimiento comprobado en instalaciones de distribución de gas y agua, y aplicaciones industriales.

Excelente servicio - PLASSON le brinda un servicio inigualado, con su pericia y experiencia de más de 40 años en el terreno.

Fittings

490104/490103

Page 103

Coupler
Enlace Recto



4901L4

Page 104

Long Coupler
Enlace Largo



450104

Page 104

Coupler (PN 25)
Enlace Recto (PN 25)



460104/460103

Page 106

LightFit Coupler (PN 10)
Enlace LightFit (PN 10)



4601S3

Page 107

Super LightFit (PN 6.4)



491104

Page 108

Reducing Coupler
Enlace Reductor



491107

Page 109

Spigot Reducer
Reductor Espiga



49009

Page 110

Flex Restraint



494204

Page 111

Monolithic End Cap
Tapón Monolítico



491204

Page 111

End Cap
Tapón



491207

Page 112

Spigot End Plug
Tapón Espiga



490404

Page 113

90° Tee
90° Enlace T



492404

Page 113

Two Outlets Reducing Tee
Enlace te Reductor con
Salida Doble



491404

Page 114

Reducing Tee
Enlace T Reductor



499404

Page 115

Flanged Tee
Enlace T Bridado



490504

Page 115

90° Elbow
90° Codo



490604

Page 116

45° Elbow
45° Codo



490804

Page 116

Elbow 22.5°
Codo 22.5°



46060

Page 117

45° LightFit Elbow
45° Codo LightFit



46330

Page 117

30° LightFit Elbow
30° Codo LightFit



46370

Page 118

15° LightFit Elbow
15° Codo LightFit



490904

Page 118

180° Elbow
180° Codo



491904

Page 119

Y Reducer
Y Reductor



491504

Page 119

90° Duckfoot Elbow
Codo 90° Empotrable



4915Q4

Page 120

90° Duckfoot Elbow with Outlet
90° Codo Empotrable con
Toma de Servicio



4947C4

Page 120

Adjustable Elbow
Codo Ajustable



4947D4

Page 121

Adjustable Elbow One Sided
Codo Ajustable Enlace/
Espiga



496804

Page 121

Balloon Saddle
Collarín Globo



498304

Page 122

Monolithic Weld End Cap for
Ballon Saddle
Tapón Monolítico Soldable
para Collarín Globo



4958T4

Page 122

Saddle Female Rp
Threaded Outlet



495204

Page 125

Repair Saddle
Toma de Reparación



493804

Page 126

Transition Saddle
Collarín de Transición



493803

Page 127

Sensor Adaptor with Brass
Thread



4938S3

Page 128

Sensor Adaptor with a
Stainless Steel thread



495804

Page 129

Branch Saddle
Collarín de Derivación



495804

Page 130

Branch Saddle
Collarín de Derivación



4958X4

Page 130

Branch Saddle



495803

Page 131-132

XL & XXL Branch Saddle
XL & XXL Collarín de Derivación



4758W

Page 133

LightFit Branch Saddle
Collarín de Derivación
LightFit



4658S3

Page 133

Super LightFit Branch Saddle



495904

Page 134

Flange Branch Saddle
Collarín bridado



4959X4

Page 135

Flanged Branch Saddles
Collarín Bridado



495204

Page 135

Repair Saddle
Collarín de reparación



496304

Page 136-137

Tapping Saddle
Toma de Servicio



491304

Page 138

High Volume Tapping Tee
(HVTT)



498304

Page 138

Welding Cap for Tapping Saddle
Tapón Soldable para toma de Servicio



4921N4

Page 140

PA Male Transition Coupler
PA Enlace de Transición Macho



4921N7

Page 141

PA Male Transition Adaptor
PA Adaptador de Transición Macho



4931N7

Page 142

PA Female Adaptor



4931N4

Page 142

PA Coupler Female Adaptor



4925N4

Page 143

90° PA Male Elbow



4926N4

Page 143

45° PA Male Elbow



4935N4

Page 144

90° PA Female Elbow



4936N4

Page 144

45° PA Female Elbow



436207

Page 145

PE Ball Valve
Válvula de Bola PE



436Q7

Page 145

PE Ball Valve with
Two Purges
PE Ball Válvula de
Bola con purga



495404/4954S4

Page 146

Tapping Valve
Toma de Servicio con
Válvula



492104

Page 147

Male Transition Coupler
Enlace de Transición Macho



493104

Page 147

Female Transition Coupler
Enlace de Transición
Hembra



492504

Page 148

90° Male Transition Elbow
90° Codo de Transición
de Macho



493504

Page 148

90° Female Transition Elbow
90° Codo de Transición de
Hembra



492604

Page 149

45° Male Transition Elbow
45° Codo de Transición de
Macho



493604

Page 149

45° Female Transition Elbow
45° Codo de Transición de
Hembra



494104

Page 150

Female Free Nut
Transition Coupler
Enlace de Transición,
Tuerca Libre, Hembra



494504

Page 150

Female Free Nut
90° Transition Elbow
90° Codo de Transición de
Tuerca Libre, Hembra



494604

Page 151

Female Free Nut Transition
45° Elbow
45° Codo de Transición de
Tuerca Libre, Hembra



494404

Page 151

Female Union Free Nut
Transition Tee
Enlace T, PE/Latón, Tuerca
Libre, Hembra



497104

Page 152

PE Male Transition Coupler
Enlace de Transición PE
Macho



497504

Page 152

90° PE Male Transition Elbow
90° Codo de Transición PE de
Macho



497604

Page 153

45° PE Male Transition Elbow
45° Codo de Transición PE de
Macho



497704

Page 154

PE Cast Iron Flange
Transition Coupler
Enlace de Transición
Bridado - PE Hierro Fundido



495704

Page 154

PE Cast Iron Spigot
Transition Coupler
Enlace de Transición Espiga
- PE Hierro Fundido



Wastewater Line

490209

Page 155

Full Face Flange
Brida de Cara Plana



490207

Page 155

Stub Flange
Adaptador de Brida



09903

Page 156

Flange Backing Ring
Brida Revestida



475804

Page 158

Wastewater Adjustable
Saddle
Ramal para Aguas
Residuales



4758A4

Page 158

45° Wastewater Saddle -
Inlet 110
45° Ramal de Salida para
Aguas Residuales



4758V4

Page 159

Wastewater Saddle PVC/PP
Adaptor Inlet
Collarin Lightfit de transicion para
Aguas Residuales de PE A PP/PVC



4758S4

Page 159

Wastewater Saddle Spigot
Inlet
Titulo



4747D4

Page 160

Wastewater Adjustable
Elbow One Sided
Codo Ajustable para Aguas
Residuales Enlace/Espiga



37020/477207

Page 160

Wastewater Manhole
Adaptor
Adaptador para Pozo de
Aguas Residuales



4701V4

Page 161

Wastewater PE to PVC
Adaptor
Adaptador Para PE A PVC



4747V4

Page 161

Wastewater Adjustable
Elbow PE to PVC
Codo Ajustable de
Transición de PE a PVC



470604

Page 162

45° Wastewater Elbow
45° Codo Para Aguas
Residuales



473304

Page 162

30° Wastewater Elbow
30° Codo Para Aguas
Residuales



473704

Page 162

15° Wastewater Elbow
15° Codo Para Aguas
Residuales




Coupler

490104


Enlace Recto



20mm up to 75mm




90mm up to 355mm



Product Code	Size d	L	L1	D	A	UC	W
490104016	16	71	34	35	39	480	58
490104020	20	76	37	31	34	440	50
490104025	25	82	40	36	37	360	40
490104032	32	88	42	44	42	256	64
490104040	40	97	47	56	46	200	97
490104050	50	101	49	67	51	125	160
490104063	63	118	58	82	56	72	230
490104075	75	126	61	98	64	60	340
490104090	90	148	73	112	71	38	475
490104110	110	163	80	135	81	23	718
490104125	125	173	85	157	87	18	1075
490104140	140	183	90	174	97	12	1295
490104160N	160	195	93	194	105	6	1555
490104180N	180	212	105	218	116	5	2112
490104200N	200	223	109	242	126	4	2785
490104225N	225	240	119	272	138	4	3900
490104250	250	251	123	301	156	2	4461
490104280	280	275	134	342	170	1	6440
490104315	315	282	139	387	184	1	8845
490104355	355	277	137	431	203	1	10200
490103400	400	293	145	485	231	1	13800

490103




Product Code	Size d	L	L1	D	A	UC*	W
490103450	450	306	153	539	257	1	16000
490103500	500	340	170	603	283	1	20200
490103560	560	376	188	674	317	1	28000
490103630N	630	418	209	759	356	1	41100
490103710	710	472	236	853	400	1	62000
490103800	800	500	250	955	450	1	87000
490103900	900	500	250	1070	503	1	100100
4901031000	1000	570	285	1194	563	1	

* Due to product size, cannot be packed in standard carton | * Cantidad óptima para embalaje en dos pallets apilados

Long Coupler

4901L4

Enlace Largo





Product Code	Size d	L	L1	D	A	UC	W
4901L4032	32	104	50	44	43	272	83
4901L4040	40	121	59	56	46	128	135
4901L4050	50	139	68	68	51	96	215
4901L4063	63	166	81	82	57	48	318

Coupler (PN 25)

450104

Enlace Recto (PN 25)





Product Code	Size d	L	L1	D	A	UC	W
450104050	50	100	49	68	52	125	147
450104063	63	118	57	82	58	72	230
450104 075	75	126	62	97	65	60	339
450104090	90	148	73	117	69	38	571
450104110	110	163	80	140	79	23	835
450104125	125	173	85	157	87	18	1075
450104140	140	105	175	181	89	12	1320
450104160	160	198	97	198	105	6	1780
450104180	180	212	104	224	114	4	2449
450104200	200	223	110	249	126	4	3295
450104225	225	240	118	280	140	4	4366
450104250	250	256	127	310	155	2	5507
450104280	280	274	135	341	166	1	6369
450104315	315	284	140	381	184	1	8884
450103355	355	280	138	430	204	1	10438



PLASSON Excess Flow Valve

The Excess Flow Valve (EFV), also called Gas Stop, is a special safety valve intended to be used in the house connection line of natural or other gas systems. It is typically installed at the outlet of the tapping saddle at the branch off point or on the house connection line, but can be installed at other locations and applications as well.

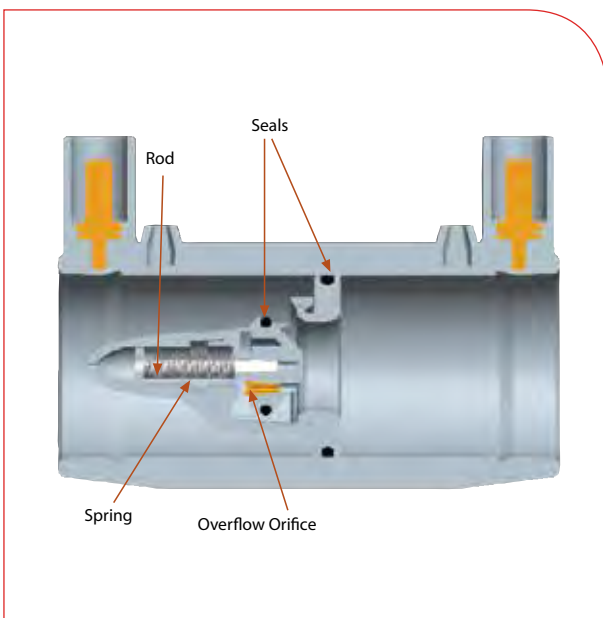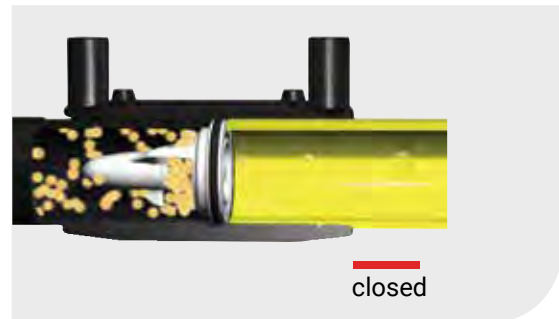

Design Features:

- Fully mechanical
- Unique design results in very low head loss at operation flow
- Easy installation

Components and Materials:

- Plastic Parts – PolyAcetal (POM-thermoplastic polymer)
- Rod – Stainless Steel or Brass (depending on model)
- Overflow Orifice - Brass
- Spring – Stainless Steel
- Seals – NBR


Application

- In PE Gas Conducting Systems

LightFit Coupler (PN10)


460104

Enlace LightFit (PN10)



Product Code	Size d	L	L1	D	A	UC	W
460104040	40	90	43	56	47	200	96
460104050	50	100	49	68	52	132	147
460104063	63	118	57	77	57	112	158
460104075	75	126	61	90	63	60	216
460104090	90	148	72	108	69	44	360
460104110	110	163	80	131	79	25	540
460104125	125	173	85	149	87	20	760
460104140	140	182	89	167	94	12	970
460104160	160	198	97	193	104	6	1320
460104180	180	212	104	215	114	5	1650
460104200	200	232	114	235	127	4	2110
460104225	225	240	118	264	141	4	2825
460104250	250	256	126	293	155	2	3728
460104280	280	275	135	332	166	1	4850
460104315	315	284	140	374	184	1	6950
460104355	355	280	138	421	204	1	7980
460104400	400	296	146	474	227	1	12000

460103*



Product Code	Size d	L	L1	D	A	UC*	W
460103450N	450 **	310	155	518	255	1	11700
460103500	500**	340	170	576	283	1	16000
460103560N	560	376	188	625	309	1	21510
460103630N	630	400	200	706	347	1	27000
460103710N	710	440	220	797	390	1	43100
460103800N	800	470	235	897	440	1	57300
460103900	900	500	250	1010	500	1	70000
4601031000	1000	600	300	1128	555	1	-
4601031200	1200	600	300	1355	667	1	-


* Due to product size, cannot be packed in standard carton | * Cantidad óptima para embalaje en dos pallets apilados

** Without Straps | ** Sin correas

Super LightFit (PN 6.4)

4601S3

Super LightFit (PN 6.4)



Product Code	Size d	L	L1	D	A	UC*	W
4601S3500	500	300	150	550	272	1	11800
4601S3560	560	310	155	620	310	1	15300
4601S3630	630	320	160	693	346	1	18200
4601S3710	710	380	190	775	388	1	25800
4601S3800	800	400	200	876	438	1	34700
4601S3900	900	420	210	983	485	1	40500
4601S31000	1000	440	220	1085	534	1	48000

* Due to product size, cannot be packed in standard carton | * Cantidad óptima para embalaje en dos pallets apilados.

Introducing the revolutionary SLF (Super LightFit) Half Coupler



Electrofusion on one side, spigot on the other,
offering the ultimate solution.

Key Benefits:

- **Compact** - Perfect for confined spaces.
- **Lightweight** - Fast and effortless installation.
- **Flexible** - Spigot length can be modified according to space and application.
- **Simple** - Saves valuable time and simplifies the work process.


The **SLF Half Coupler** is the ideal choice for installers required to perform joints in confined areas without compromising on quality or durability. A compact, simple solution delivering big results!

Upgrade with Super LightFit and experience the difference firsthand!


Reducing Coupler

491104

Enlace Reductor

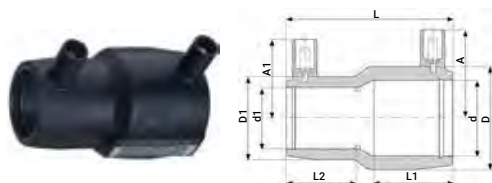

20x16mm up to 110x90mm

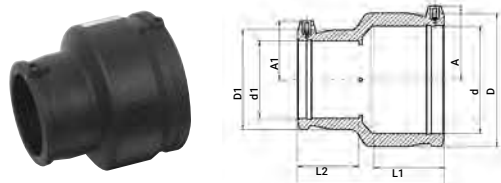


125x90mm up to 180x125mm

Product Code	Size dxd1	L	A	A1	L1	L2	D	D1	UC	W
491104020016	20 x 16	71	39	39	35	35	36	36	480	54
491104025016	25 x 16	71	38	38	35	35	36	36		49
491104025020	25 x 20	71	39	39	35	35	36	36	480	46
491104032016	32 x 16	80	42	34	39	35	44	32	360	58
491104032020	32 x 20	81	43	37	40	35	45	32	360	59
491104032025	32 x 25	81	43	39	40	35	45	36	360	56
491104040020	40 x 20	90	44	38	44	40	56	36	360	58
491104040025	40 x 25	90	47	38	44	40	56	37	200	86
491104040032	40 x 32	90	47	43	44	40	56	44	160	92
491104050025	50 x 25	100	52	41	49	41	68	37	160	118
491104050032	50 x 32	100	52	45	49	40	68	45	128	123
491104050040	50 x 40	100	52	48	49	44	68	56	128	135
491104063032	63 x 32	119	59	45	57	40	82	45	96	180
491104063040	63 x 40	119	59	49	57	44	82	56	96	192
491104063050	63 x 50	119	59	54	57	49	82	68	80	224
491104075063	75 x 63	126	66	59	66	57	98	82	65	314
491104090050	90 x 50	143	78	53	71	49	116	69	54	430
491104090063	90 x 63	143	78	61	71	57	116	82	44	460
491104090075	90 x 75	143	78	67	71	61	116	98	41	480
491104110063	110 x 63	161	84	61	78	57	139	82	32	639
491104110075	110 x 75	159	83	66	80	62	140	98	-	-
491104110090	110 x 90	161	84	74	78	72	139	116	23	740
491104125090	125 x 90	171	88	70	85	72	158	116	18	1019
491104125110	125 x 110	171	88	80	85	78	158	141	18	1025
491104160090	160 x 90	193	105	69	94	72	199	116	12	1440
491104160110	160 x 110	193	105	80	94	81	199	141	12	1520
491104160125	160 x 125	195	105	89	94	85	199	158	6	1570
491104180125	180 x 125	212	116	87	103	85	222	158	6	2060

Spigot Reducer

491107

Reductor Espiga

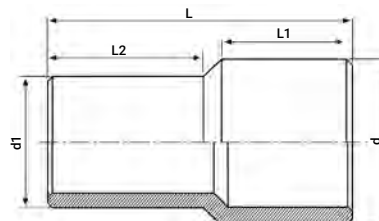

Product Code	Size dxd1	L	L1	L2	UC	W
491107032025	32 x 25	104	50	48	240	30
491107040032	40 x 32	123	59	56	240	90
491107050032	50 x 32	129	59	56	160	100
491107050040	50 x 40	131	59	60	264	80
491107063032	63 x 32	131	59	58	144	110
491107063040	63 x 40	132	59	58	144	120
491107063050	63 x 50	132	60	60	128	125
491107075040	75 x 40	145	71	60	96	167
491107075050	75 x 50	145	71	59	96	180
491107075063	75 x 63	151	71	65	72	210
491107090050	90 x 50	156	81	59	56	280
491107090063	90 x 63	160	80	65	48	300
491107090075	90 x 75	166	80	71	40	320
491107110063	110 x 63	167	83	66	36	450
491107110075	110 x 75	169	83	72	36	460
491107110090	110 x 90	178	83	80	28	510
491107125090	125 x 90	186	90	81	24	655
491107125110	125 x 110	188	90	84	18	730
491107140090	140 x 90	208	95	80	16	850
491107140110	140 x 110	195	95	83	16	850
491107140125	140 x 125	199	95	89	12	950
491107160110	160 x 110	219	101	84	10	1,360
491107160125	160 x 125	206	101	88	16	1170
491107160140	160 x 140	211	101	94	10	1270
491107180125	180 x 125	221	107	89	10	1500
491107180140	180 x 140	224	107	95	10	1600
491107180160	180 x 160	225	107	100	8	1750
491107200140	200 x 140	229	114	93	8	2200
491107200160	200 x 160	233	115	100	6	2,420
491107200180	200 x 180	241	116	106	5	2350
491107225160	225 x 160	295	132	123	—	3,100
491107225180	225 x 180	285	130	118	—	3,190
491107225200	225 x 200	272	126	120	—	3,700
491107250160	250 x 160	308	149	100	—	4,100
491107250180	250 x 180	316	151	105	—	4,000
491107250200	250 x 200	324	151	116	—	4,200
491107250225	250 x 225	330	155	122	—	4,700
491107280200	280 x 200	345	140	116	—	11,700
491107280225	280 x 225	335	142	122	—	6,090
491107280250	280 x 250	340	139	135	—	6,500
491107315225	315 x 225	365	150	125	—	8,000
491107315250	315 x 250	365	147	134	—	8,000
491107315280	315 x 280	365	150	145	—	9,000
491107355250	355 x 250	390	164	136	—	11,800
491107355280	355 x 280	390	164	139	—	13,150
491107355315	355 x 315	390	164	150	—	13,000
491107400280	400 x 280	415	179	139	—	17,400
491107400315	400 x 315	415	179	150	—	17,200
491107400355	400 x 355	420	179	164	—	17,800


Maximum Pressure: PN 16 (cold water) | Presión Máxima: PN 16 (agua fría)

Additional dimensions and pressure rated spigots are available upon request

Los tamaños y presiones no enunciados en la tabla están disponibles a pedido

Flex Restraint

49009




Product Code	Size	L	H	B	D1	D2	UC	W
49009998	160-1600	237	60	65	13.5	11	48	470

* See dedicated tools on page 187 | * Ver herramientas necesarias en pag.187

Flex Restraint

49009




Product Code	Size	L	H	B	UC	W
49009999	140-1600	202	40	65	60	300

* See dedicated tools on page 187 | * Ver herramientas necesarias en pag. 187

Monolithic End Cap

494204

Tapón Monolítico




Product Code	Size d	L	L1	D	A	UC	W
494204032	32	63	44	44	46	432	50
494204040	40	70	48	55	51	256	75
494204050	50	82	55	68	56	192	122
494204063	63	95	62	81	62	96	182


End Cap

491204

Tapón



20mm up to 75mm



90mm up to 315mm


Product Code	Size d	L	L1	D	A	UC	W
491204020	20	84	37	31	34	400	55
491204025	25	92	40	36	37	400	50
491204032	32	103	42	44	42	300	76
491204040	40	114	47	56	46	160	130
491204050	50	121	49	67	51	108	204
491204063	63	142	57	82	57	72	327
491204075	75	156	61	98	64	48	499
491204090	90	183	73	117	70	30	820
491204110	110	206	78	140	81	20	1259
491204125	125	222	85	157	87	15	1702
491204140	140	237	90	174	97	10	2346
491204160	160	261	93	194	105	6	2990
491204180	180	283	105	218	116	5	4159
491204200	200	289	109	242	126	4	5260
491204225	225	318	119	272	138	2	7260
491204250	250	344	123	311	156	1	8381
491204280	280	396	134	340	170	1	11740
491204315	315	405	139	387	184	2*	16045

* Due to product size, cannot be packed in standard carton | * Cantidad óptima para embalaje en dos pallets apilados

Spigot End Plug

491207

Tapón Espiga




Product Code	Size d	L	L1	UC	W
491207020	20	43	35	2000	8
491207025	25	46	36	1600	10
491207032	32	52	39	960	17
491207040	40	59	43	560	29
491207050	50	68	48	352	52
491207063	63	81	57	192	95
491207075	75	90	60	132	149
491207090	90	105	70	72	250
491207110	110	121	78	57	430
491207125	125	131	82	36	596
491207140	140	142	87	25	797
491207160	160	157	94	18	1149
491207180	180	172	101	14	1600
491207200	200	178	112	10	2089
491207225	225	196	120	6	2800
491207250	250	216	130	4	3920
491207280	280	257	162	3	5300
491207315	315	262	167	2	7200


90° Tee

490404

90° Enlace T



20mm up to 75mm

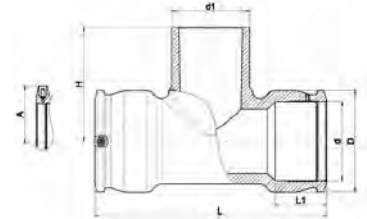


90mm up to 250mm

Product Code	Size dxd1xd	L	L1	D	H	A	UC	W
490404020	20 x 20 x 20	96	37	33	60	39	260	61
490404025	25 x 25 x 25	103	39	44	66	43	168	110
490404032	32 x 32 x 32	104	39	44	74	43	144	97
490404040	40 x 40 x 40	120	43	56	90	47	96	165
490404050	50 x 50 x 50	139	48	68	102	52	56	257
490404063	63 x 63 x 63	167	58	82	119	58	32	417
490404075	75 x 75 x 75	196	63	96	129	62	26	639
490404090	90 x 90 x 90	294	71	113	137	71	15	1090
490404110	110 x 110 x 110	326	71	143	160	81	8	1955
490404125	125 x 125 x 125	382	86	165	177	88	4	2950
490404160	160 x 160 x 160	396	97	209	222	105	3	4758
490404180	180 x 180 x 180	422	106	245	250	116	1	7200
490404200	200 x 200 x 200	451	114	261	265	125	1	8650
490404225	225 x 225 x 225	494	122	293	290	140	1	11860
490404250	250 x 250 x 250	538	129	326	315	152	1	16250

Two Outlets Reducing Tee

492404

Enlace te Reductor con Salida Doble


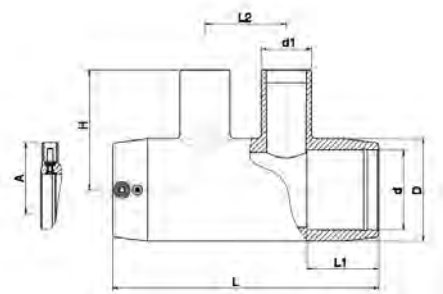


Product Code	Size dxd1 - d1xd	L	L1	L2	D	H	A	UC	W
49240400025	40 x 25 - 25 x 40	176	46	57	56	72	46	96	229
49240400032	40 x 25 - 25 x 40	176	46	57	56	76	46	75	233
492404050025	50 x 25 - 25 x 50	195	49	65	68	79	51	56	342
492404050032	50 x 32 - 32 x 50	195	49	65	68	83	51	58	336
492404050040	50 x 32 - 32 x 50	195	49	65	68	89	51	52	352
492404063025	63 x 32 - 32 x 63	213	58	65	82	86	57	42	457
492404063032	63 x 40 - 40 x 63	213	58	65	82	90	57	40	464
492404063040	63 x 40 - 40 x 63	213	58	65	82	96	57	36	480

Reducing Tee

491404

Enlace T Reductor



20mm up to 75mm

90mm up to 250mm


Product Code	Size dxd1xd	L	L1	D	H	A	UC	W
491404025020	25 x 20 x 25	104	39	44	66	43	168	108
491404025032	25 x 32 x 25*	104	39	44	74	43	168	116
491404032020	32 x 20 x 32	104	39	44	66	43	144	89
491404032025	32 x 25 x 32	104	39	44	66	43	144	91
491404040020	40 x 20 x 40	120	43	56	72	47	96	151
491404040025	40 x 25 x 40	120	43	56	72	47	96	150
491404040032	40 x 32 x 40	120	43	56	75	47	96	152
491404050020	50 x 20 x 50	139	48	68	78	52	64	224
491404050025	50 x 25 x 50	139	48	68	78	52	64	225
491404050032	50 x 32 x 50	139	48	68	86	52	64	228
491404050040	50 x 40 x 50	139	48	68	90	52	64	237
491404063020	63 x 20 x 63	167	49	82	85	58	40	348
491404063032	63 x 32 x 63	167	58	82	93	58	32	353
491404063040	63 x 40 x 63	167	58	82	104	58	32	365
491404063050	63 x 50 x 63	167	58	82	109	58	32	381
491404075063	75 x 63 x 75	196	63	96	122	62	26	607
491404090063	90 x 63 x 90	294	68	113	124	71	15	1050
491404090075	90 x 75 x 90	293	71	36	14	71	112	137
491404110063	110 x 63 x 110	326	71	143	134	81	9	1715
491404110075	110 x 75 x 110	328	72	143	142	81	9	1730
491404110090	110 x 90 x 110	326	71	143	147	81	8	1815
491404125090	125 x 90 x 125	382	86	165	161	88	5	2805
491404125110	125 x 110 x 125	382	86	165	173	88	5	2859
491404160090	160 x 90 x 160	396	97	209	192	105	3	4185
491404160110	160 x 110 x 160	440	86	208	193	106	3	4470
491404160125	160 x 125 x 160	440	86	208	198	106	3	4470
491404180090	180 x 90 x 180	422	106	245	200	116	2	6090
491404180110	180 x 110 x 180	422	106	245	219	116	2	6270
491404180125	180 x 125 x 180	422	106	245	225	116	2	6410
491404180140	180 x 140 x 180	422	106	245	237	116	1	6610
491404180160	180 x 160 x 180	422	106	245	250	116	1	6950
491404200090	200 x 90 x 200	451	114	261	205	125	2	7140
491404200110	200 x 110 x 200	451	114	261	210	125	2	7235
491404225090	225 x 90 x 225	494	122	293	220	140	1	9900
491404225110	225 x 110 x 225	494	122	293	225	140	1	10000
491404250090	250 x 90 x 250	538	129	326	235	152	1	13350
491404250110	250 x 110 x 250	538	129	326	240	152	1	13400

* This size enlarges | * Esta media agranda

Flanged Tee

499404

Enlace T Bridado




Product Code	Size d x DN x d	L	L1	D	H	A	t	s	d1	DP	UC	W
499404090080	90 x 80 x 90	294	71	113	165	71	20	8 x 18	138	160	8	2835
499404110080	110 x 80 x 110	326	71	143	181	81	20	8 x 18	138	160	6	3560
499404110100	110 x 100 x 110	326	71	143	181	81	22	8 x 18	158	180	6	4240
499404125080	125 x 80 x 125	382	86	165	190	88	20	8 x 18	138	160	4	4550
499404125100	125 x 100 x 125	382	86	165	190	88	22	8 x 18	158	180	3	5180
499404160080	160 x 80 x 160	440	86	208	210	106	20	8 x 18	138	160	3	6245
499404160100	160 x 100 x 160	440	86	208	210	106	22	8 x 18	158	180	3	6785
499404180080	180 x 80 x 180	422	106	245	225	116	20	8 x 18	138	160	2	7745
499404180100	180 x 100 x 180	422	106	245	225	116	22	8 x 18	158	180	1	8550
499404200080	200 x 80 x 200	451	114	261	240	125	20	8 x 18	138	160	1	8530
499404200100	200 x 100 x 200	451	114	261	245	125	22	8 x 18	158	180	1	9230
499404225080	225 x 80 x 225	494	122	293	255	140	20	8 x 18	138	160	1	11240
499404225100	225 x 100 x 225	494	122	293	260	140	22	8 x 18	158	180	1	11900
499404250080	250 x 80 x 250	538	129	326	270	152	20	8 x 18	138	160	1	14750
499404250100	250 x 100 x 250	538	129	326	275	152	22	8 x 18	158	180	1	15400


90° Elbow

490504

90° Codo



20mm up to 75mm




90mm up to 250mm

Product Code	Size d	L	L1	D	A	UC	W
490504020	20	66	35	36	38	320	65
490504025	25	66	37	36	38	320	52
490504032	32	83	40	44	43	192	85
490504040	40	92	44	55	47	120	138
490504050	50	108	48	68	52	72	211
490504063	63	131	57	81	59	40	320
490504075	75	158	69	97	62	33	527
490504090	90	213	78	113	69	19	875
490504110	110	243	79	143	79	9	1519
490504125	125	271	100	165	89	7	2424
490504140	140	309	93	183	94	4	3024
490504160	160	323	87	209	106	3	3990
490504180	180	412	105	244	115	2	7590
490504200	200	449	112	262	124	1	8670
490504225	225	498	121	295	140	1	12200
490504250	250	550	130	327	152	1	13500

45° Elbow

490604

45° Codo

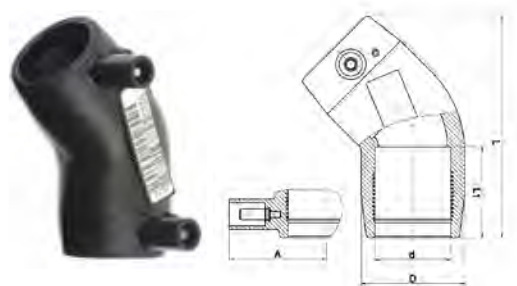

32mm up to 75mm




90mm up to 250mm

Product Code	Size d	L	L1	D	A	UC	W
490604032	32	95	39	45	43	240	75
490604040	40	108	42	55	46	160	117
490604050	50	125	49	68	51	96	181
490604063	63	148	57	81	59	60	264
490604075	75	180	71	96	62	40	426
490604090	90	243	75	112	69	22	759
490604110	110	271	81	143	78	12	1269
490604125	125	304	86	165	88	8	2030
490604140	140	342	92	182	95	5	2471
490604160	160	350	95	209	105	4	3350
490604180	180	434	105	244	114	2	6150
490604200	200	472	112	261	125	1	7050
490604225	225	520	120	294	140	1	9800
490604250	250	571	129	326	151	1	13400

22.5° Elbow

490804

22.5° Codo




Product Code	Size d	L	L1	D	A	UC	W
490804090	90	214	72	113	71	26	665
490804110	110	232	71	143	81	14	1087
490804125	125	274	86	165	88	8	1850
490804160	160	302	86	209	106	5	2930
490804180	180	391	105	244	115	2	5360

45° LightFit Elbow

46060

45° Codo LightFit

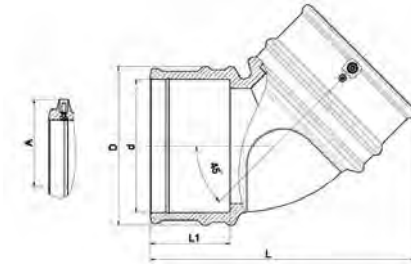


Product Code	Size d	L	L1	D	A	UC	W
460604160	160	323	98	193	106	4	1976

30° LightFit Elbow

46330

30° Codo LightFit

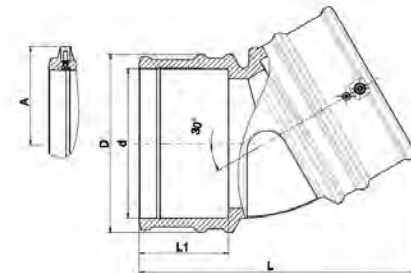


Product Code	Size d	L	L1	D	A	UC	W
463304160	160	300	98	193	106	4	1798

15° LightFit Elbow

46370

15° Codo LightFit

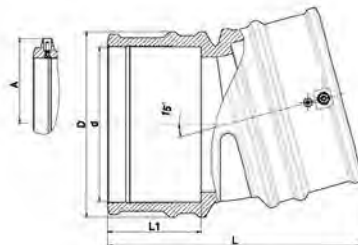


Product Code	Size d	L	L1	D	A	UC	W
463704160	160	265	98	193	106	6	1728

180° Elbow

490904

180° Codo

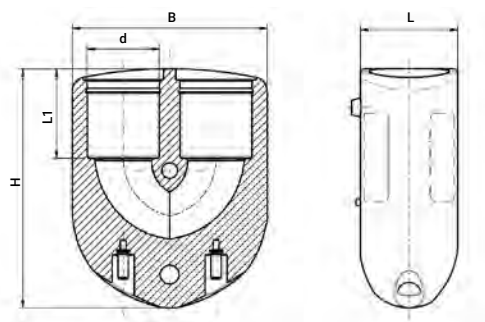


Product Code	Size d	L	L1	H	B	UC	W
490904025	25	38	38	99	72	156	169
490904032	32	44	41	108	88	144	216
490904040	40	53	48	123	106	80	323

Y Reducer

491904

Y Reductor

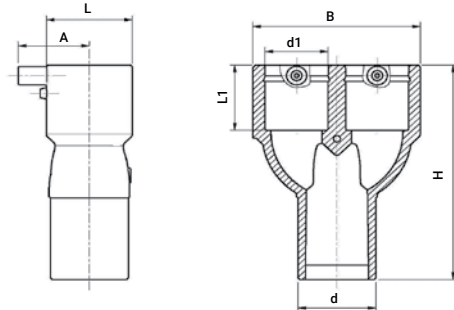


Product Code	Size d x d1 x d1	L	L1	B	A	H	UC	W
491904032025	32 x 25 x 25	36	40	70	38	119	200	97
491904040032	40 x 32 x 32	45	43	87	42	133	120	151
491904050040	50 x 40 x 40	56	46	108	46	151	80	242

90° Duckfoot Elbow

491504

90° Codo Empotrable

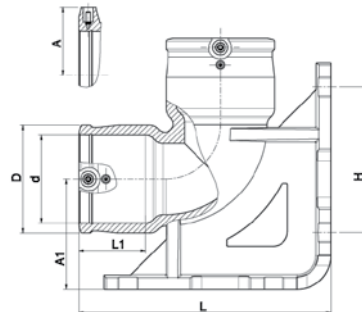


Product Code	Size d	L	L1	D	A	A1	H	UC	W
491504090	90	261	69	112	71	115	146	5	2260

90° Duckfoot Elbow With Outlet

4915Q4

90° Codo Emportable con toma de servicio

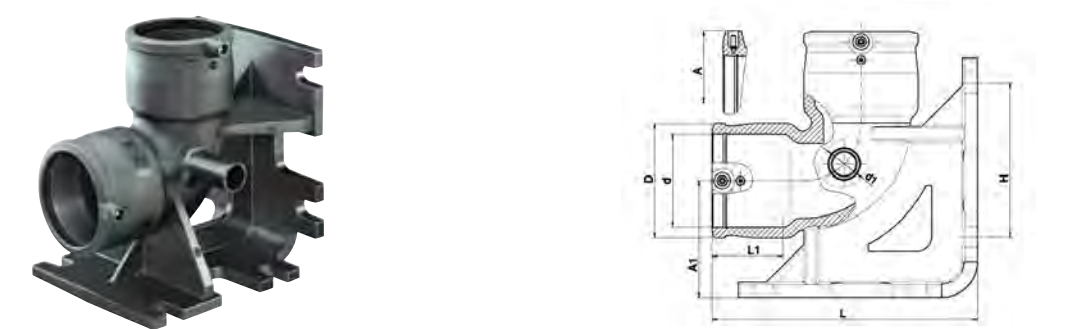


Product Code	Size d x d1	L	L1	D	A	A1	H	UC	W
4915Q4090032	90 x 32	261	69	112	71	115	146	5	2265

Adjustable Elbow

4947C4

Codo Ajustable

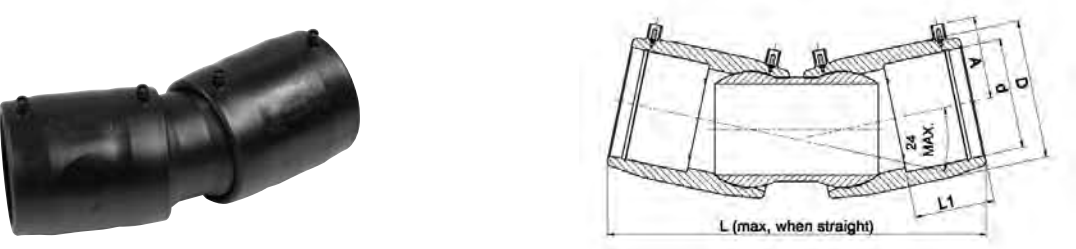


Product Code	Size d	L	L1	D	A	UC	W
4947C4090	90	341	72	116	77	12	1450
4947C4110	110	362	80	140	83	8	2030
4947C4125	125	382	85	157	95	8	2630
4947C4160	160	453	97	215	106	3	4510
4947C4180	180	489	99	221	115	2	7490
4947C4200	200	512	104	250	125	2	9733
4947C4225	225	600	105	282	141	1	13230
4947C4250	250	644	123	312	156	1	16775

Adjustable Elbow One Sided

4947D4

Codo Ajustable Enlace/Espiga

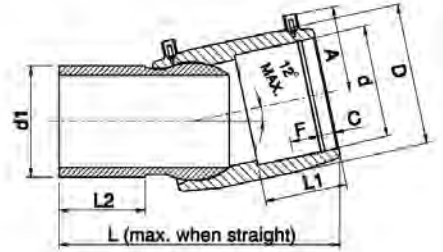


Product Code	Size d x d1	L	L1	L2	D	A	UC	W
4947D4090	90 x 90	258	72	82	116	77	20	940
4947D4110	110 x 110	276	85	85	140	83	12	1290
4947D4125	125 x 125	292	90	90	157	95	12	1740
4947D4160	160 x 160	341	97	100	215	106	4	3150
4947D4180	180 x 180	370	99	145	221	115	3	4210
4947D4200	200 x 200	370	104	116	250	125	2	6172
4947D4225	225 x 225	426	105	124	282	141	2	8340
4947D4250	250 x 250	455	123	134	312	156	1	10800

Balloon Saddle

496804

Collarín Globo

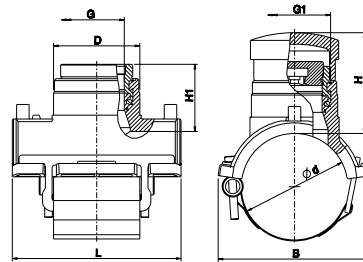


Product Code	Size d x G	G1	B	H	H1	D	L	UC	W
496804090025	90 x 2"	2 1/2"	142	105	70	90	176	10	1961
496804110025	110 x 2"	2 1/2"	160	105	70	90	176	10	1973
496804125025	125 x 2"	2 1/2"	169	105	70	90	176	10	1981
496804140025	140 x 2"	2 1/2"	174	105	70	90	176	10	2000
496804160025	160 x 2"	2 1/2"	176	105	70	90	176	10	1984
496804180025	180 x 2"	2 1/2"	182	105	70	90	176	10	1997
496804200025	200 x 2"	2 1/2"	202	105	70	90	176	10	1991
496804225025	225 x 2"	2 1/2"	227	105	70	90	176	10	2003
496804250025	250 x 2"	2 1/2"	252	105	70	90	176	10	2010

Monolithic Weld End Cap for Balloon Saddle

498304

Tapón Monolítico Soldable para collarín globo




Product Code	Size d	L	L1	D	A	UC	W
498304090	90	123	77	117	77	55	479

Saddle Female Rp Threaded Outlet

4958T4

Collarín BSPP Rosca Hembra

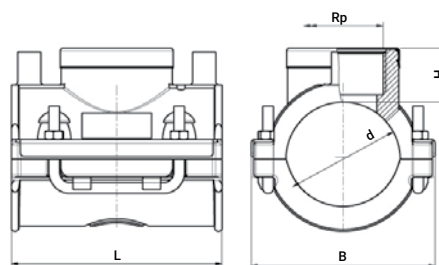

Product Code	Size d x Rp	B	H	L	UC	W
4958T4063007	63 x 3/4"	100	30	118	60	385
4958T4063010	63 x 1"	100	30	118	60	390
4958T4063013	63 x 1 1/4"	100	30	118	58	400
4958T4063015	63 x 1 1/2"	100	30	118	60	400
4958T4090010	90 x 1"	126	30	118	36	520
4958T4090013	90 x 1 1/4"	126	30	118	36	530
4958T4090015	90 x 1 1/2"	126	30	118	36	540

PLASSON Electrofusion Saddles

For Large Diameter PE Pipes



495804 | 5958B



4758W



495904



495803



495204




493804

PLASSON





TRANSPORTING

ALTERNATIVE



APPLICATION

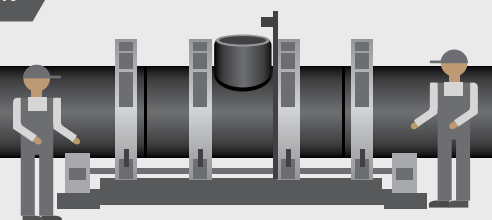

PLASSON SADDLE 450-800X160



STORAGE



FABRICATED TEE
500X160



FABRICATED TEE
450X160



FABRICATED TEE
630X160



FABRICATED TEE
560X160



FABRICATED TEE
800X160



FABRICATED TEE
710X160

PE has become well established in pipeline applications since its introduction in the 1950s.

The numerous benefits of PE material include its flexibility, corrosion resistance and the option of fully welded systems, all leading to PE systems being used in a wide field of applications and increasingly larger diameters. Plasson, in keeping with latest market trends, continues to develop innovative fittings and installation tools, providing the end users all that is required in order to perform their task in the most convenient and professional way.

Plasson electrofusion fittings are designed for optimal performance using FEA (Final Element Analysis) software. The combination of engineering experience gained over 25 years, and use of leading PE 100 materials in the market provide for an estimated service life of over 100 years.



PLASSON Sensor Adaptor

Plasson Sensor Adaptor provides a dedicated solution for connecting the sensor to the piping system, eliminating the need to apply leak-prone improvised connections. Plasson's Sensor adaptors enable quick and easy integration of various sensors onto a wide range of PE pipe diameters. Pressure rated Water PN16, Gas PE100 SDR11. Threaded brass/Stainless Steel Outlets according to ISO 7-1 (Female Rp thread), available in dimensions 1/2", 3/4" and 1".



Universal


- Two Saddles cover extensive range of pipe diameters:
- 110 (4" IPS) – 400mm (16" IPS)
- 450 (18" IPS) – 1200mm (48" IPS)

Fast and simple installation

The Sensor Adaptor is designed to deal with the challenges of connecting to large PE pipes, such as ovality and deformation resulting from aging, handling and storage by obtaining full contact along the welding zone.

Using one of the two unique yet simple clamping device options (Strap or Bolt) ensures the correct welding of the Sensor Adaptor.

- Correct tightening force indicator on strap mechanism

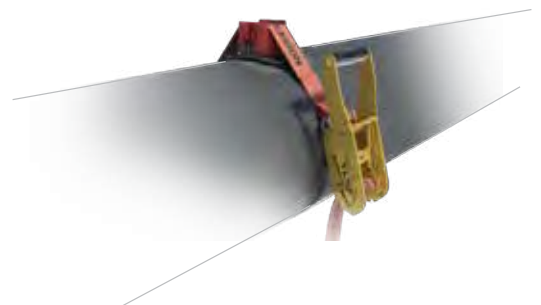

Specifications



The fittings are tested and approved to meet the following standard requirements:

ISO 4427, Part 3 (Water), ISO 4437, Part 3 (Gas)
EN 12201, Part 3 (Water), EN 1555, Part 3 (Gas)
AS/NZS 4129: 2008
DVGW GW 335-B2

Repair Saddle

495204

Toma de Reparación



Product Code	Size d	B	H	L	Max Damage Length	UC	W
495204063	63	100	29	118	38	72	378
495204075	75	117	29	118	38	48	410
495204090	90	126	29	118	38	40	504
495204110	110	148	29	118	38	32	555
495204125	125	162	29	118	38	24	620
495204140	140	180	29	118	38	24	660
495204160	160	199	29	118	38	24	718
495204180	180	219	29	118	38	16	759

Transition Saddle

493804


Collarín de Transición




63mm up to 180mm
Outlets 1 1/4" and 1 1/2"



90mm up to 250mm
Outlet 2"



Product Code	Size d x G	B	H	L	UC	W
493804063013	63 x 1 1/4"	100	53	118	48	612
493804075013	75 x 1 1/4"	117	53	118	40	656
493804090015	90 x 1 1/2"	121	53	118	16	930
493804090020	90 x 2"	142	76	176	14	1436
493804110015	110 x 1 1/2"	142	53	118	12	1006
493804110020	110 x 2"	158	76	176	12	1500
493804125015	125 x 1 1/2"	158	53	118	12	1049
493804125020	125 x 2"	166	76	176	12	1510
493804140015	140 x 1 1/2"	175	53	118	10	1072
493804140020	140 x 2"	174	76	176	10	1520
493804160015	160 x 1 1/2"	196	53	118	8	1163
493804160020	160 x 2"	176	76	176	10	1540
493804180015	180 x 1 1/2"	216	53	118	6	1200
493804180020	180 x 2"	182	76	176	10	1500
493804200020	200 x 2"	202	76	176	10	1575
493804225020	225 x 2"	227	76	176	10	1570
493804250020	250 x 2"	252	76	176	10	1546

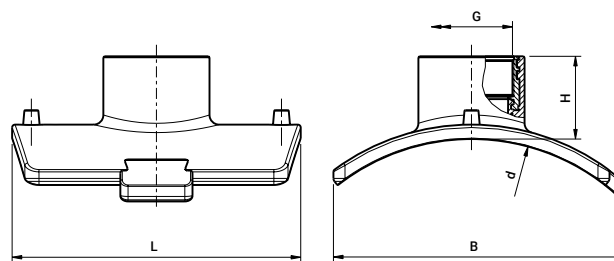


Product Code	Size d x G	B	H	L	UC	W
493804400020*	280-400 x 2"	305	77	306	8	1975
493804710020*	450-800 x 2"	315	77	306	8	1960

* See dedicated tools on page 188 | * Ver herramientas necesarias en pag. 188

Sensor Adaptor with Brass Thread

493803*

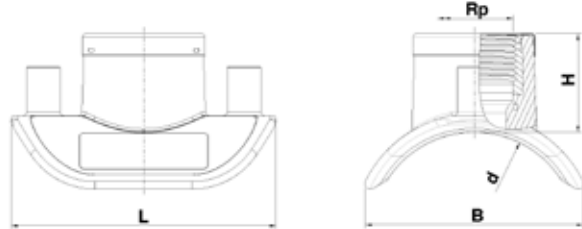


Product Code	Size d x Rp**	B	H	L	UC	W
493803400005	110-400 x 1/2"	85	35	103	140	120
493803400007	110-400 x 3/4"	85	38	103	140	120
493803400010	110-400 x 1"	85	38	103	132	120
493803900005	450-1200 x 1/2"	85	35	103	140	120
493803900007	450-1200 x 3/4"	85	38	103	140	120
493803900010	450-1200 x 1"	85	38	103	140	120

* See dedicated tools on page 187 | * Ver herramientas necesarias en pag. 187

Sensor Adaptor with a Stainless Steel Thread

4938S3*

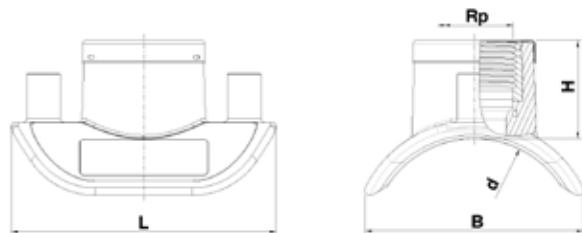

Product Code	Size d x Rp	H	B	L	UC	W
4938S3400005	110-400 x 1/2"	35	85	103	140	109.3
4938S3400007	110-400 x 3/4"	38	85	103	140	120
4938S3400010	110-400 x 1"	38	85	103	140	148.3
4938S3900005	450-1200 x 1/2"	35	85	103	140	109.3
4938S3900007	450-1200 x 3/4"	38	85	103	140	120
4938S3900010	450-1200 x 1"	38	85	103	140	148.3

* See dedicated tools on page 187 | * Ver herramientas necesarias en pag. 187

** NPT thread available upon request

PLASSON New Branch Saddle



PLASSON has developed a new range of innovative designed branch saddles equipped with an integrated clamping mechanism for a quick, easy and accessory free installation process.

The new branch saddles exceed the performance requirements of the toughest national and international standards in the market.

Our new saddles offer an innovative design, simplifying the installation process by eliminating the need for dedicated clamping tools.

Single bolt


- No clamping tools.
- By tightening the bolt, the cables clamp the saddle to the pipe, ensuring a uniform high quality weld.

Full bore

- Minimal head loss.
- SDR 11 outlet suitable for electrofusion or butt weld connections.

Weld integrity test

- Special test port is incorporated into the saddle, enabling pressure testing of the weld prior to cutting into the pipe mains.

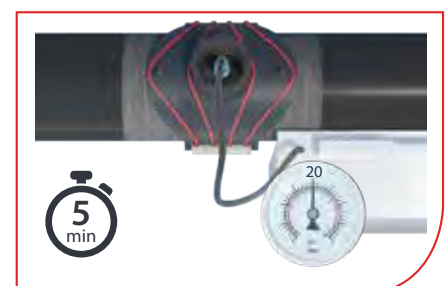

Branch Saddle

495804


Collarín de Derivación



63mm up to 180mm
Outlets 32mm to 63mm



200mm up to 315mm
and all sizes with Outlet 90mm




Product Code	Size d x d1	B	H1	LS	L	di	UC	W
495804063032	63 x 32	100	59	49	118	23	56	394
495804063040	63 x 40	100	78	66	118	29.5	40	400
495804063050	63 x 50	100	93	82	118	37.5	40	430
495804063063	63 x 63	100	94	85	118	45	40	462
495804075032	75 x 32	117	59	49	118	23	48	431
495804075040	75 x 40	117	78	66	118	29.5	36	451
495804075050	75 x 50	117	93	82	118	37.5	32	465
495804075063	75 x 63	117	94	85	118	45	32	522
495804090032	90 x 32	126	59	49	118	23	32	519
495804090040	90 x 40	126	78	68	118	29.5	32	529
495804090050	90 x 50	126	93	82	118	37.5	32	550
495804090063	90 x 63	126	94	85	118	45	24	608
495804090090	90 x 90	139	105	90	176	66	15	934
495804110032	110 x 32	148	59	49	118	23	24	585
495804110040	110 x 40	148	78	68	118	29.5	24	598
495804110050	110 x 50	148	93	82	118	37.5	20	629
495804110063	110 x 63	148	94	85	118	45	20	658
495804110090	110 x 90	162	105	90	176	68	18	949
495804125032	125 x 32	162	59	49	118	23	24	634
495804125040	125 x 40	162	78	68	118	29.5	20	644
495804125050	125 x 50	162	93	82	118	37.5	20	670
495804125063	125 x 63	162	94	85	118	45	16	703
495804125090	125 x 90	169	105	90	176	68	18	953
495804140032	140 x 32	180	59	49	118	23	24	661
495804140040	140 x 40	180	78	68	118	29.5	16	677
495804140050	140 x 50	180	93	82	118	37.5	16	705
495804140063	140 x 63	180	94	85	118	45	16	740
495804140090	140 x 90	174	105	90	176	68	16	965
495804160032	160 x 32	200	59	49	118	23	16	744
495804160040	160 x 40	200	78	68	118	29.5	16	757
495804160050	160 x 50	200	93	82	118	37.5	16	778
495804160063	160 x 63	200	94	85	118	45	16	804
495804160090	160 x 90	176	105	90	176	68	16	961
495804180032	180 x 32	219	59	49	118	23	16	800
495804180040	180 x 40	219	78	68	118	29.5	12	800
495804180050	180 x 50	219	93	82	118	37.5	12	828
495804180063	180 x 63	219	94	85	118	45	12	886
495804180090	180 x 90	182	105	90	176	68	15	962
495804200063	200 x 63	202	102	85	176	47	15	862
495804200090	200 x 90	202	105	90	176	68	15	900
495804225063	225 x 63	227	102	85	176	47	15	882
495804225090	225 x 90	227	105	90	176	68	15	983
495804250063	250 x 63	252	102	85	176	47	15	970
495804250090	250 x 90	252	105	90	176	68	15	1070

Branch Saddle*

495804

Collarín de Derivación*

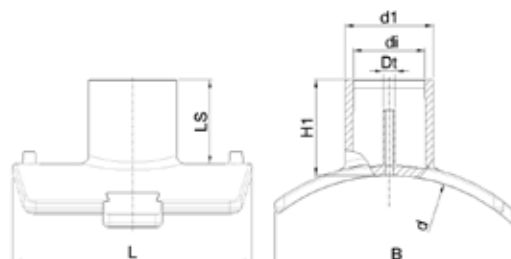


Product Code	Size d x d1	B	H1	LS	L	di	Dt	UC	W
495804400090T	280 - 400 x 90	305	115	102	300	73	16	7	1510
495804400110T	280 - 400 x 110	305	117	104	300	89	16	7	1650
495804400125T	280 - 400 x 125	305	110	119	300	101	16	6	1760
495804400160T	280 - 400 x 160	305	132	119	300	130	16	6	2167
495804710090T	450 - 800 x 90	315	117	105	300	73	16	7	1598
495804710110T	450 - 800 x 110	315	117	105	300	89	16	7	1601
495804710125T	450 - 800 x 125	315	117	109	300	101	16	7	1739
495804710160T	450 - 800 x 160	315	130	115	300	130	16	6	2017

* See "Large bore saddles installation tools" section at page 188 | * Consulte la sección "Herramientas de instalación de Tomas Simples/ Acometidas/Ramales de gran diámetro" en la página 188.

Branch Saddle

4958X4

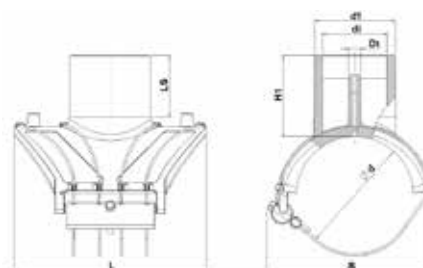

Product Code	Size d x d1	B	H1	LS	L	di	Dt	UC	W
4958X4125090T	125 x 90	180	106	81	242	73	16	9	890
4958X4125110T	125 x 110	180	109	84	242	89	16	9	1000
4958X4140090T	140 x 90	189	106	81	242	73	16	9	830
4958X4140110T	140 x 110	189	109	84	242	89	16	9	900
4958X4160090T	160 x 90	222	107	81	263	73	16	6	1330
4958X4160110T	160 x 110	222	110	84	263	89	16	6	1220
4958X4180090T	180 x 90	229	107	81	263	73	16	6	1480
4958X4180110T	180 x 110	229	110	84	263	89	16	6	1140
4958X4180125T	180 x 125	240	157	126	338	102	16	4	2600
4958X4180160T	180 x 160	240	167	137	338	130	16	—	—
4958X4200090T	200 x 90	277	109	81	295	73	16	6	1960
4958X4200110T	200 x 110	277	111	84	295	89	16	6	1930
4958X4200125T	200 x 125	240	157	126	338	102	16	—	—
4958X4200160T	200 x 160	240	167	137	338	130	16	—	—
4958X4225090T	225 x 90	277	109	81	295	73	16	6	1800
4958X4225110T	225 x 110	277	112	85	295	89	16	6	1500
4958X4225125T	225 x 125	294	157	126	340	102	16	—	—
4958X4225160T	225 x 160	291	167	137	338	130	16	3	2640
4958X4250090T	250 x 90	280	109	81	295	73	16	6	1650
4958X4250110T	250 x 110	280	111	84	295	89	16	6	1310
4958X4250125T	250 x 125	294	157	126	340	102	16	4	2420
4958X4250160T	250 x 160	291	167	152	338	160	16	3	2910

XL & XXL Branch Saddle*

495803

XL&XXL Collarín de Derivación*




Product Code	d x d1	B	L	di	LS	H1	Dt	UC	W
495803355250T	315-355 x 250	390	420	204	140	200	16	1	7420
495803400180T	400 x 180	393	470	147	135	169	16	1	4800
495803450180T	450 x 180	393	470	147	135	169	16	1	5000
495803450200TN	400-450 x 200	373	420	164	142	182	16	1	5300
495803450225TN	400-450 x 225	373	420	184	142	182	16	1	6050
495803450250TN	400-450 x 250	391	420	205	172	194	16	1	7030
495803450280T	450 x 280	450	530	230	169	225	16	1	10900
495803450315T	450 x 315	450	530	257	180	220	16	1	13000
495803500180T	500 x 180	411	470	147	135	169	16	1	4840
495803500200T	500 x 200	398	470	163	142	180	16	1	5870
495803500225T	500 x 225	400	470	184	150	189	16	1	6200
495803500280T	500 x 280	465	530	230	169	225	16	1	10800
495803500315T	500 x 315	480	540	257	180	227	16	1	13500
495803500355T	500 x 355	500	610	252	194	252	16	1	17670
495803560180T	560 x 180	416	470	147	135	169	16	1	4700
495803560200T	560 x 200	400	470	163	142	180	16	1	5600
495803560225T	560 x 225	400	470	184	150	189	16	1	6500
495803560280T	560 x 280	477	530	230	169	225	16	1	—
495803560315T	560 x 315	472	540	257	180	227	16	1	12800
495803560355T	560 x 355	512	610	252	194	252	16	1	17200
495803560400T	560 x 400	505	620	327	209	258	16	1	20100
495803630180T	630 x 180	420	470	147	135	169	16	1	4890
495803630200TN	500 - 630 x 200	425	420	164	160	185	16	1	5300
495803630225TN	500 - 630 x 225	425	420	184	203	225	16	1	5900
495803630250T	500 - 630 x 250	400	420	205	203	225	16	1	6670
495803630280T	630 x 280	489	530	230	169	225	16	1	10900
495803630315T	630 x 315	481	540	257	180	227	16	1	12700
495803630355T	630 x 355	522	610	252	194	252	16	1	16650
495803630400T	630 x 400	520	620	327	209	258	16	1	20400
495803710180T	710 x 180	425	470	147	135	169	16	1	4600
495803710200T	710 x 200	410	470	163	142	180	16	1	5780
495803710225T	710 x 225	410	470	184	150	187	16	1	6400
495803710250T	710 x 250	430	470	204	160	195	16	1	7500
495803710280T	710 x 280	498	530	230	169	225	16	1	10900
495803710315T	710 x 315	500	530	257	180	220	16	1	12600
495803710355T	710 x 355	532	610	252	194	252	16	1	17200
495803710400T	710 x 400	530	610	327	209	250	16	1	19400
495803800180T	800 x 180	430	470	147	135	169	16	1	4700
495803800200T	800 x 200	410	470	163	142	180	16	1	5790
495803800225T	800 x 225	415	470	184	150	189	16	1	6200
495803800250T	800 x 250	430	470	204	160	197	16	1	7500
495803800280T	800 x 280	505	530	230	169	225	16	1	—
495803800315T	800 x 315	510	530	257	180	220	16	1	12200
495803800355T	800 x 355	543	610	252	194	252	16	1	17040
495803800400T	800 x 400	540	610	327	209	250	16	1	20000

* See "Large bore saddles installation tools" section at page 188 | * Consulte la sección "Herramientas de instalación de Tomas Simples/ Acometidas/Ramales de gran diámetro" en la página 188.

XL & XXL Branch Saddle**

495803

XL&XXL Collarín de Derivación**

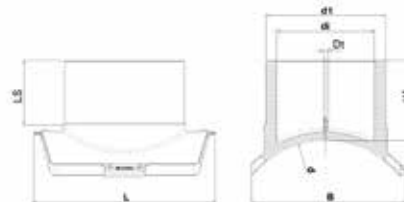


Product Code	d x d1	B	L	di	LS	H1	Dt	UC	W
495803900110T	900 x 110	320	300	89	105	123	16	6	1900
495803900125T	900 x 125	320	300	101	110	130	16	6	2100
495803900160T	900 x 160	295	300	130	113	131	16	6	2390
495803900180T	900 x 180	435	470	147	135	169	16	1	4600
495803900200T	900 x 200	415	470	163	142	180	16	1	5300
495803900225T	900 x 225	415	470	184	150	189	16	1	6350
495803900250T	900 x 250	440	470	204	160	197	16	1	7200
495803900280T	900 x 280	511	530	230	169	225	16	1	10900
495803900315T	900 x 315	510	530	257	180	220	16	1	12100
495803900355T	900 x 355	554	610	252	194	252	16	1	17200
495803900400T	900 x 400	550	610	327	209	250	16	1	20000
4958031000110T	1000 x 110	320	300	89	105	123	16	6	2000
4958031000125T	1000 x 125	320	300	101	110	128	16	6	2200
4958031000160T	1000 x 160	320	300	130	120	138	16	6	3000
4958031000180T	1000 x 180	443	470	147	166	184	16	1	4600
4958031000200T	1000 x 200	443	470	163	176	198	16	1	5800
4958031000225T	1000 x 225	443	470	184	181	203	16	1	6200
4958031000250T	1000 x 250	443	470	204	190	213	16	1	7360
4958031000280T	1000 x 280	516	530	230	169	225	16	1	—
4958031000315T	1000 x 315	516	530	257	211	236	16	1	12,320
4958031000355T	1000 x 355	563	610	252	194	252	16	1	16,830
4958031000400T	1000 x 400	563	610	327	240	267	16	1	20,000
4958031200110T	1200 x 110	320	300	89	105	123	16	6	2000
4958031200125T	1200 x 125	320	300	101	110	128	16	6	2200
4958031200160T	1200 x 160	320	300	130	120	138	16	6	2500
4958031200180T	1200 x 180	447	470	147	166	184	16	1	4700
4958031200200T	1200 x 200	447	470	163	176	198	16	1	5740
4958031200225T	1200 x 225	447	470	184	181	203	16	1	6350
4958031200250T	1200 x 250	447	470	204	190	213	16	1	7370
4958031200280T	1200 x 280	527	530	230	169	225	16	1	—
4958031200315T	1200 x 315	526	530	257	211	236	16	1	12000
4958031200355T	1200 x 355	575	610	252	194	252	16	1	16400
4958031200400T	1200 x 400	574	610	327	240	267	16	1	20,000

* See "Large bore saddles installation tools" section at page 188 | * Consulte la sección "Herramientas de instalación de Tomas Simples/ Acometidas/Ramales de gran diámetro" en la página 188.

LightFit Branch Saddle

4758W

Collarín de Derivación LightFit

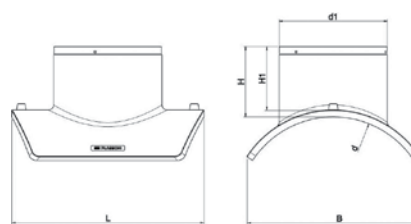


Product Code	d x d1	B	L	H	H1	UC	W
4758W4450225	315 - 450 x 225	359	400	145	130	1	3700
4758W4630225	450 - 630 x 225	389	400	145	130	1	3740
4758W4800225	630 - 800 x 225	407	400	145	130	1	3835

* See "Large bore saddles installation tools" section at page 188 | * Consulte la sección "Herramientas de instalación de Tomas Simples/ Acometidas/Ramales de gran diámetro" en la página 188.

Super LightFit

4658S3

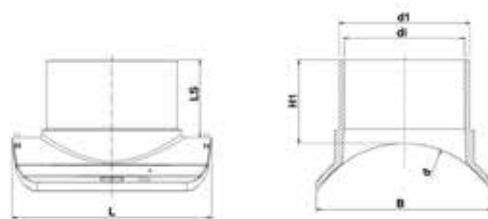


Product Code	Size d x d1	B	L	LS	H1	di	UC	W
4658S3400160	400 x 160	326	406	156	174	148	1	
4658S34500160	450 x 160	334	406	156	174	148	1	
4658S3500160	500 x 160	337	406	156	174	148	1	
4658S3560160	560 x 160	344	406	156	174	148	1	
4658S3630160	630 x 160	350	406	156	174	148	1	
4658S3710160	710 x 160	354	406	156	174	148	1	
4658S3800160	800 x 160	357	406	156	174	148	1	
4658S3900160	900 x 160	359	406	156	174	148	1	
4658S31000160	1000 x 160	361	406	156	174	148	1	
4658S3400200	400 x 200	349	400	173	191	185	1	
4658S3450200	450 x 200	361	400	173	191	185	1	
4658S3500200	500 x 200	370	400	173	191	185	1	5760
4658S3630200	630 x 200	380	400	173	191	185	1	5330
4658S3710200	710 x 200	385	400	173	191	185	1	2860
4658S3800200	800 x 200	390	400	173	191	185	1	2680
4658S3900200	900 x 200	393	400	173	191	185	1	2700
4658S31000200	1000 x 200	396	400	173	191	185	1	5600
4658S3400250	400 x 250	372	430	188	205	231	1	
4658S3450250	450 x 250	386	430	188	205	231	1	
4658S3500250	500 x 250	395	430	188	205	231	1	3800
4658S3630250	630 x 250	411	430	188	205	231	1	6850
4658S3710250	710 x 250	416	430	188	205	231	1	6690
4658S3800250	800 x 250	419	430	188	205	231	1	3670
4658S3900250	900 x 250	423	430	188	205	231	1	3670
4658S31000250	1000 x 250	427	430	188	205	231	1	3670
4658S3450315	450 x 315	428	500	208	226	291	1	
4658S3500315	500 x 315	444	500	208	226	291	1	9860
4658S3630315	630 x 315	468	500	208	226	291	1	5700
4658S3710315	710 x 315	477	500	208	226	291	1	9590
4658S3800315	800 x 315	483	500	208	226	291	1	9520
4658S3900315	900 x 315	488	500	208	226	291	1	5880
4658S31000315	1000 x 315	490	500	208	226	291	1	9430

Flange Branch Saddle*

495904

Collarín bridado

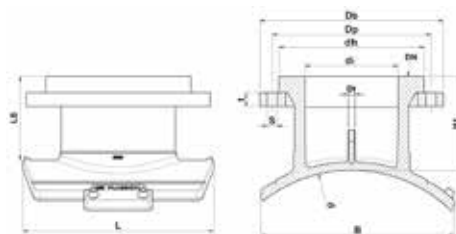


Product Code	d x DN	B	L	di	dh	Db	Dt	Dp	LS	H1	s	t	UC	W
495903355250T	315 - 355 x 250	390	420	204	320	410	16	355	198±15	220±15	26	33	1	19730
495904400080T	280 - 400 x 80	305	300	73	138	200	16	160	102±15	115±15	18	20	1	
495904400100T	280 - 400 x 100	309	300	102	158	220	16	180	110±15	121±15	18	22	1	
495904400150T	280 - 400 x 150	305	300	131	212	285	16	240	119±15	132±15	22	24	1	
495903450200TN	400 - 450 x 200	373	420	184	268	344	16	295	168±15	190±15	22	28	1	11730
495903450250TN	400 - 450 x 250	391	420	204	320	410	16	355	198±15	220±15	26	33		19000
495903450300T	450 x 300	450	530	257	370	467	16	410	195±15	220±15	26	40	1	27300
495903500300T	500 x 300	460	530	257	370	467	16	410	195±15	220±15	26	40	1	22700
495903560300T	560 x 300	475	530	257	370	467	16	410	195±15	220±15	26	40	1	22750
495903560400T	560 x 400	510	610	327	482	595	16	525	258±15	285±15	30	54	1	
495903630200TN	500-630 x 200	405	420	184	268	344	16	295	168±15	190±15	22	28	1	11900
495903630250T	500-630 x 250	425	420	204	320	410	16	355	198±15	220±15	26	33	1	15400
495903630300T	630 x 300	490	530	257	370	467	16	410	195±15	220±15	26	40	1	27300
495903630400T	630 x 400	520	610	327	482	595	16	525	258±15	285±15	30	54	1	66000
495903710200T	710 x 200	410	470	184	268	344	16	295	168±15	190±15	22	28	1	
495903710250T	710 x 250	430	470	204	320	410	16	355	198±15	220±15	26	33	1	19500
495903710300T	710 x 300	500	530	257	370	467	16	410	195±15	220±15	26	40	1	34650
495903710400T	710 x 400	530	610	327	482	595	16	525	258±15	285±15	30	54	1	
495904710080T	450 - 800 x 80	315	300	73	138	200	16	160	105±15	117±15	18	20	1	
495904710100T	450 - 800 x 100	315	300	102	158	220	16	180	110±15	123±15	18	22	1	
495904710150T	450-800 x 150	315	300	131	212	285	16	240	121±15	132±15	22	24	1	
495903800200T	800 x 200	410	470	184	268	344	16	295	168±15	190±15	22	28	1	12270
495903800250T	800 x 250	430	470	204	320	410	16	355	198±15	220±15	26	33	1	19500
495903800300T	800 x 300	510	530	257	370	467	16	410	195±15	220±15	26	40	1	27600
495903800400T	800 x 400	540	610	327	482	595	16	525	258±15	285±15	30	54	1	45800
495903900150T	900 x 150	318	300	131	212	285	16	240	120±15	132±15	22	24	2	6640
495903900200T	900 x 200	415	470	184	268	344	16	295	168±15	190±15	22	28	1	
495903900250T	900 x 250	440	470	204	320	410	16	355	198±15	220±15	26	33	1	19450
495903900300T	900 x 300	510	530	257	370	467	16	410	195±15	220±15	26	40	1	
495903900400T	900 x 400	550	610	327	482	595	16	525	258±15	285±15	30	54	1	52000
4959031000100T	1000 x 100	320	300	101	158	220	16	180	102±15	120±15	22	24	4	
4959031000150T	1000 x 150	320	300	131	212	285	16	240	113±15	131±15	22	24	1	
4959031000200T	1000 x 200	443	470	184	268	344	16	295	168±15	190±15	22	28	1	
4959031000250T	1000 x 250	443	470	204	320	410	16	355	198±15	220±15	26	33	1	
4959031000300T	1000 x 300	516	530	257	370	467	16	410	195±15	220±15	26	40	1	
4959031000400T	1000 x 400	563	610	327	482	595	16	525	258±15	285±15	30	54	1	
4959031200100T	1200 x 100	320	300	101	158	220	16	180	102±15	120±15	22	24	1	
4959031200150T	1200 x 150	320	300	131	212	285	16	240	113±15	131±15	22	24	1	
4959031200200T	1200 x 200	447	470	184	268	344	16	295	168±15	190±15	22	28	1	13080
4959031200250T	1200 x 250	447	470	204	320	410	16	355	198±15	220±15	26	33	1	
4959031200300T	1200 x 300	526	530	257	370	467	16	410	195±15	220±15	26	40	1	
4959031200400T	1200 x 400	574	610	327	482	595	16	525	258±15	285±15	30	54	1	50100

* See "Large bore saddles installation tools" section at page 188 | * Consulte la sección "Herramientas de instalación de Tomas Simples/ Acometidas/Ramales de gran diámetro" en la página 188.

Flanged Branch Saddles for Pipes 125-250

4959X4

Collarín Bridado

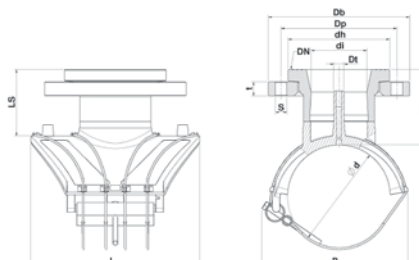


Product Code	d x DN	L	B	H1*	LS*	Db	Dp	dh	di	Dt	t	s	No. Holes
4959X4125100T	125X100	242	180	123±15	110±15	220	180	158	87	16	22	18	8
4959X4140100T	140X100	242	186	123±15	110±15	220	180	158	87	16	22	18	8
4959X4160100T	160X100	263	219	124±15	110±15	220	180	158	87	16	22	18	8
4959X4180100T	180X100	338	240	124±15	110±15	220	180	158	102	16	22	18	8
4959X4180150T	180X150	338	291	125±15	121±15	285	240	212	131	16	24	22	8
4959X4200100T	200X100	338	240	125±15	110±15	220	180	158	102	16	22	18	8
4959X4200150T	200X150	338	291	132±15	121±15	285	240	212	131	16	24	22	8
4959X4225100T	225X100	295	272	125±15	110±15	220	180	158	87	16	22	18	8
4959X4225150T	225X150	338	291	132±15	121±15	285	240	212	131	16	24	22	8
4959X4250100T	250X100	295	280	125±15	110±15	220	180	158	102	16	22	18	8
4959X4250150T	250X150	338	291	132±15	121±15	285	240	212	131	16	24	22	8

* May be customized according to customer's requirements.

Repair Saddle

495204

Collarín de reparación



Product Code	Size d	B	H	L	Max Damage Length	UC	W
495204900070	250-900	305	30	300	70	16	1500
495203900230	400-900	471	43	610	230	3	6900

* See "Large bore saddles installation tools" section at page 188 | * Consulte la sección "Herramientas de instalación de Tomas Simples/ Acometidas/Ramales de gran diámetro" en la página 188.

Tapping Saddle

496304

Toma de Servicio



40mm up to 63mm 75mm up to 180mm 200mm up to 250mm

Product Code	Type*	Size d x d1	H	B	H1	H2	L	Welding Cap Type	UC	W
496304040020	mb	40 x 20	107	66	7	94	100	Type C	52	290
496304040025	mb	40 x 25	90	65	7	98	100	Type C	52	349
496304040032	mb	40 x 32	121	66	11	94	100	Type C	52	295
496304050020	mb	50 x 20	110	76	7	98	100	Type C	52	390
496304050025	mb	50 x 25	91	76	10	98	100	Type C	50	390
496304050032	mb	50 x 32	122	76	12	98	100	Type C	45	390
496304063020N	mb	63 x 20	90	100	10	90	118	Type C	40	362
496304063025N	mb	63 x 25	93	100	12	36	118	Type C	40	364
496304063032N	mb	63 x 32	99	100	12	90	118	Type C	40	369
496304063040		63 x 40	142	100	64	177	118	Type A	16	1080
496304063050		63 x 50	154	100	64	177	118	Type A	16	1099
496304063063		63 x 63	175	100	64	177	118	Type A	16	962
496304075020		75 x 20	125	117	50	177	118	Type A	16	1120
496304075032		75 x 32	132	117	56	177	118	Type A	16	1091
496304075040		75 x 40	142	117	60	177	118	Type A	16	1124
496304075050		75 x 50	123	117	64	177	118	Type A	16	1140
496304075063		75 x 63	175	117	64	177	118	Type A	16	1228
496304090020	mb	90 x 20	117	126	16	114	118	Type B	20	900
496304090025	mb	90 x 25	108	126	16	114	118	Type B	20	1120
496304090032	mb	90 x 32	126	126	16	114	118	Type B	20	778
496304090040	mb	90 x 40	134	126	21	114	118	Type B	20	1130
496304090050		90 x 50	123	126	64	177	118	Type A	14	1220
496304090063		90 x 63	175	126	64	177	118	Type A	14	1300

* Please note: mb = Mono Block | * Nota: mb = monobloque

** Sizes 63 mm and up available with parallel outlet.

Tapping Saddle

496304

Toma de Servicio



40mm up to 63mm 75mm up to 180mm 200mm up to 250mm


Product Code	Type*	Size d x d1	H	B	H1	H2	L	Welding Cap Type	UC	W
496304110020	mb	110 x 20	119	148	16	114	118	Type B	20	964
496304110025	mb	110 x 25	118	148	16	114	118	Type B	20	830
496304110032	mb	110 x 32	127	148	16	114	118	Type B	20	970
496304110040	mb	110 x 40	138	148	21	114	118	Type B	20	1000
496304110050		110 x 50	123	148	64	177	118	Type A	12	1300
496304110063		110 x 63	175	148	64	177	118	Type A	12	1383
496304125020	mb	125 x 20	116	162	16	114	118	Type B	15	1220
496304125025	mb	125 x 25	95	162	16	114	118	Type B	15	880
496304125032	mb	125 x 32	131	162	16	114	118	Type B	15	899
496304125040	mb	125 x 40	141	162	21	114	118	Type B	15	1280
496304125050		125 x 50	123	162	64	177	118	Type A	12	1345
496304125063		125 x 63	175	162	64	177	118	Type A	12	1426
496304140020		140 x 20	125	180	50	177	118	Type A	12	1340
496304140032		140 x 32	132	180	56	177	118	Type A	12	1330
496304140040		140 x 40	142	180	60	177	118	Type A	12	1360
496304140050		140 x 50	123	180	64	177	118	Type A	12	1382
496304140063		140 x 63	175	180	64	177	118	Type A	12	1468
496304160020	mb	160 x 20	118	199	21	138	118	Type A	10	1360
496304160025	mb	160 x 25	100	199	21	138	118	Type A	10	1170
496304160032	mb	160 x 32	144	199	16	138	118	Type A	10	1320
496304160040	mb	160 x 40	157	199	21	138	118	Type A	10	1216
496304160050	mb	160 x 50	175	199	24	138	118	Type A	10	1375
496304160063	mb	160 x 63	197	199	20	138	118	Type A	10	1390
496304180020		180 x 20	125	219	50	177	118	Type A	10	1550
496304180025	mb	180 x 25	110	219	18	138	118	Type A	10	1100
496304180032	mb	180 x 32	144	219	18	138	118	Type A	10	1565
496304180040	mb	180 x 40	155	219	21	138	118	Type A	10	1274
496304180050	mb	180 x 50	174	219	24	138	118	Type A	10	1595
496304180063	mb	180 x 63	197	219	20	138	118	Type A	10	1605
496304200020		200 x 20	125	202	50	177	176	Type A	8	1425
496304200032		200 x 32	132	202	56	177	176	Type A	8	1451
496304200040		200 x 40	142	202	60	177	176	Type A	8	1471
496304200050		200 x 50	123	202	64	177	176	Type A	8	1496
496304200063		200 x 63	175	202	64	177	176	Type A	8	1579
496304225020		225 x 20	125	227	50	177	176	Type A	8	1370
496304225032		225 x 32	132	227	56	177	176	Type A	8	1450
496304225040		225 x 40	142	227	60	177	176	Type A	8	1485
496304225050		225 x 50	123	227	64	177	176	Type A	8	1506
496304225063		225 x 63	175	227	64	177	176	Type A	8	1589
496304250020		250 x 20	125	252	50	177	176	Type A	8	1455
496304250032		250 x 32	132	252	56	177	176	Type A	8	1464
496304250040		250 x 40	142	252	60	177	176	Type A	8	1582
496304250050		250 x 50	123	252	64	177	176	Type A	8	1589
496304250063		250 x 63	175	252	64	177	176	Type A	8	1386

* Please note: mb = Mono Block | * Nota: mb = monobloque

High Volume Tapping Tee (HVTT)

491304

Toma en carga de alto volumen




Product Code	size d x d1	B	L	H	H1	H2	Cutter Dia.	UC	W
491304090063	90 x 63	139	176	130	75	195	47	8	1965
491304110063	110 x 63	156	176	130	75	195	47	8	1960
491304125063	125 x 63	165	176	130	75	195	47	8	1935
491304140063	140 x 63	171	176	130	75	195	47	8	—
491304160063	160 x 63	173	176	130	75	195	47	8	1970
491304180063	180 x 63	176	176	130	75	195	47	8	1940
491304200063	200 x 63	178	176	130	75	195	47	8	—
491304225063	225 x 63	180	176	130	75	195	47	8	1970
491304250063	250 x 63	180	176	130	75	195	47	8	2000
491304280063	280 x 63	180	176	130	75	195	47	8	1975
491304315063	315 x 63	183	176	130	75	195	47	8	2010

Welding Cap for Tapping Saddle

498304

Tapón Soldable para toma de servicio



Product Code	Type	Size	D	A	H	L	L1	UC	W
498304057	Type A	57	74	59	74	63	36	128	157
498304050	Type B	50	62	54	73	66	30	192	111
498304040	Type C	40	51	49	63	55	26	256	73


PLASSON PA Threads

- ✓ Corrosion free
- ✓ Ideal for handling high-pressure environments, stresses and heavy loads
- ✓ Smooth assembly and disassembly, reducing the risk of thread damage
- ✓ Suitable for outdoor applications
- ✓ Suitable for professionals and DIY enthusiasts alike



PA Male Transition Coupler


4921N4

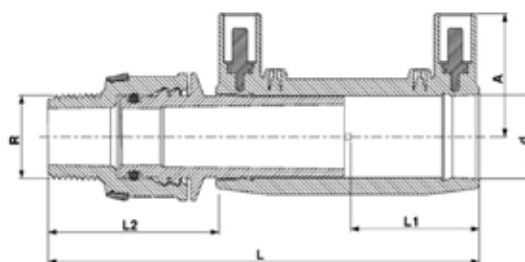

Product Code	Size d x R	L	L1	L2	A	UC	W
4921N4020005	20 x 1/2"	128	37	52	35	260	90
4921N4020007	20 x 3/4"	129	37	53	35	260	90
4921N4020010	20 x 1"	131	37	55	35	240	90
4921N4025005	25 x 1/2"	132	40	49	37	260	0
4921N4025007	25 x 3/4"	133	40	50	37	260	0
4921N4025010	25 x 1"	135	40	52	37	240	100
4921N4032007	32 x 3/4"	156	44	66	41	140	180
4921N4032010	32 x 1"	158	44	68	41	128	190
4921N4032013	32 x 1 1/4"	161	44	71	41	180	200
4921N4032015	32 x 1 1/2"	161	44	71	41	200	190
4921N4032020	32 x 2"	166	44	76	41		0
4921N4040007	40 x 3/4"	162	48	64	46	120	240
4921N4040010	40 x 1"	164	48	66	46	100	250
4921N4040013	40 x 1 1/4"	167	48	69	46	80	230
4921N4040015	40 x 1 1/2"	167	48	69	46		0
4921N4040020	40 x 2"	172	48	74	46	64	470
4921N4050013	50 x 1 1/4"	190	50	88	51	60	480
4921N4050015	50 x 1 1/2"	190	50	88	51	30	560
4921N4050020	50 x 2"	194	50	92	51	36	570
4921N4063013	63 x 1 1/4"	205	58	87	58	40	580
4921N4063015	63 x 1 1/2"	205	58	87	58		
4921N4063020	63 x 2"	209	58	91	58		

PA Male Transition Adaptor


4921N7

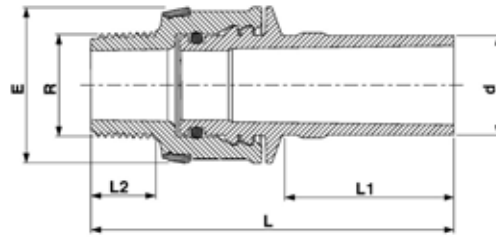

Product Code	Size d x R	E	L	L1	L2	UC	W
4921N7020005	20 x 1/2"	40	89	42	16	320	40
4921N7020007	20 x 3/4"	40	90	42	17	320	50
4921N7020010	20 x 1"	40	92	42	18	260	50
4921N7025005	25 x 1/2"	40	89	42	20	320	40
4921N7025007	25 x 3/4"	40	90	42	17	320	40
4921N7025010	25 x 1"	40	92	42	18	260	60
4921N7032007	32 x 3/4"	56	110	47	20	300	120
4921N7032010	32 x 1"	56	112	47	18	240	110
4921N7032013	32 x 1 1/4"	56	115	47	20	250	120
4921N7032015	32 x 1 1/2"	56	115	47	22	180	130
4921N7032020	32 x 2"	61	120	47	22	200	120
4921N7040007	40 x 3/4"	56	112	52	26	200	130
4921N7040010	40 x 1"	56	114	52	18	200	150
4921N7040013	40 x 1 1/4"	56	116	52	20	160	150
4921N7040015	40 x 1 1/2"	56	116	52	22	110	300
4921N7040020	40 x 2"	61	122	52	22	94	310
4921N7050013	50 x 1 1/4"	80	138	57	26	70	310
4921N7050015	50 x 1 1/2"	80	138	57	22	65	330
4921N7050020	50 x 2"	80	142	57	22	65	340
4921N7063013	63 x 1 1/4"	80	144	65	26	60	350
4921N7063015	63 x 1 1/2"	80	144	65	22		
4921N7063020	63 x 2"	80	148	65	22		

PA Female Adaptor


4931N7

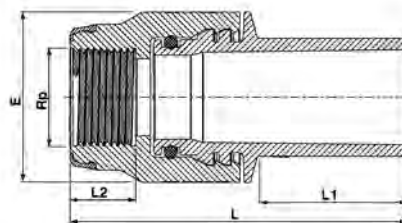

Product Code	Size d x Rp	E	L	L1	L2	UC	W
4931N7020005	20 x 1/2"	40	86	42	17		
4931N7020007	20 x 3/4"	43	87	42	18		
4931N7020010	20 x 1"	50	88	42	21		
4931N7025005	25 x 1/2"	40	86	42	17		
4931N7025007	25 x 3/4"	43	87	42	18		
4931N7025010	25 x 1"	50	88	42	21		
4931N7032010	32 x 1"	59	110	47	21		
4931N7032013	32 x 1 1/4"	59	112	47	24		
4931N7040010	40 x 1"	59	112	52	21		
4931N7040013	40 x 1 1/4"	65	113	52	24		
4931N7050015	50 x 1 1/2"	81	137	57	24		
4931N7050020	50 x 2"	81	140	57	29		
4931N7063015	63 x 1 1/2"	81	143	65	24		
4931N7063020	63 x 2"	81	146	65	29		

PA Coupler Female Adaptor


4931N4

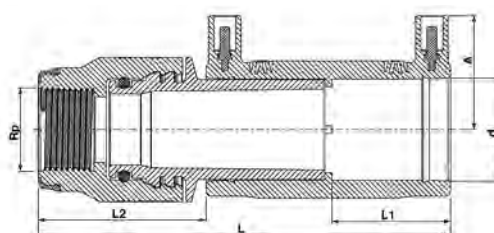

Product Code	Size d x Rp	L	L1	L2	A	UC	W
4931N4020005	20 x 1/2"	125	37	49	35		
4931N4020007	20 x 3/4"	126	37	50	35		
4931N4020010	20 x 1"	127	37	51	35		
4931N4025005	25 x 1/2"	129	40	46	37		
4931N4025007	25 x 3/4"	130	40	47	37		
4931N4025010	25 x 1"	131	40	48	37		
4931N4032010	32 x 1"	156	44	66	41		
4931N4032013	32 x 1 1/4"	158	44	68	41		
4931N4040010	40 x 1"	162	48	64	46		
4931N4040013	40 x 1 1/4"	164	48	66	46		
4931N4050015	50 x 1 1/2"	189	50	87	51		
4931N4050020	50 x 2"	192	50	90	51		
4931N4063015	63 x 1 1/2"	204	58	86	58		
4931N4063020	63 x 2"	207	58	89	58		

90° PA Male Elbow


4925N4

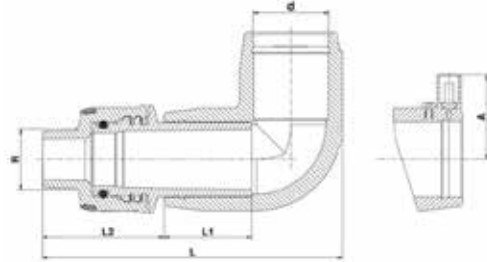

Product Code	Size d x R	L	L1	L2	A	UC	W
4925N4020005	20 x 1/2"	124	35	54	54	200	110
4925N4020007	20 x 3/4"	125	35	55	54		0
4925N4020010	20 x 1"	127	35	57	54		0
4925N4025005	25 x 1/2"	124	35	44	54		0
4925N4025007	25 x 3/4"	125	35	55	54	250	100
4925N4025010	25 x 1"	127	35	57	54	220	110
4925N4032007	32 x 3/4"	150	44	66	41	130	210
4925N4032010	32 x 1"	152	44	68	41	120	220
4925N4032013	32 x 1 1/4"	155	44	71	41	200	240
4925N4032015	32 x 1 1/2"	155	44	71	41	100	240
4925N4032020	32 x 2"	160	44	76	41		0
4925N4040007	40 x 3/4"	164	48	67	45	80	280
4925N4040010	40 x 1"	166	48	69	45	100	270
4925N4040013	40 x 1 1/4"	168	48	71	45	200	280
4925N4040015	40 x 1 1/2"	168	48	71	45		0
4925N4040020	40 x 2"	174	48	77	45		0
4925N4050013	50 x 1 1/4"	199	49	89	50		0
4925N4050015	50 x 1 1/2"	199	49	89	50		0
4925N4050020	50 x 2"	203	49	93	50	150	700
4925N4063013	63 x 1 1/4"	218	58	86	56	24	670
4925N4063015	63 x 1 1/2"	218	58	86	56		0
4925N4063020	63 x 2"	222	58	90	56	160	200

45° PA Male Elbow


4926N4

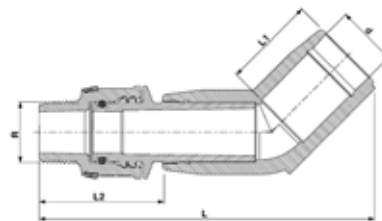

Product Code	Size d x R	L	L1	L2	A	UC	W
4926N4032007	32 x 3/4"	169	44	66	41		0
4926N4032010	32 x 1"	171	44	68	41	160	200
4926N4032013	32 x 1 1/4"	174	44	71	41	100	200
4926N4032015	32 x 1 1/2"	174	44	71	41		0
4926N4032020	32 x 2"	179	44	76	41		0
4926N4040007	40 x 3/4"	182	48	67	45		0
4926N4040010	40 x 1"	184	48	69	45	84	250
4926N4040013	40 x 1 1/4"	186	48	71	45	100	260
4926N4040015	40 x 1 1/2"	186	48	71	45		0
4926N4040020	40 x 2"	192	48	77	45	46	490
4926N4050013	50 x 1 1/4"	214	49	89	50		0
4926N4050015	50 x 1 1/2"	214	49	89	50		0
4926N4050020	50 x 2"	218	49	93	50		0
4926N4063013	63 x 1 1/4"	236	58	86	56	30	610
4926N4063015	63 x 1 1/2"	236	58	86	56		
4926N4063020	63 x 2"	240	58	90	56		

90° PA Female Elbow


4935N4

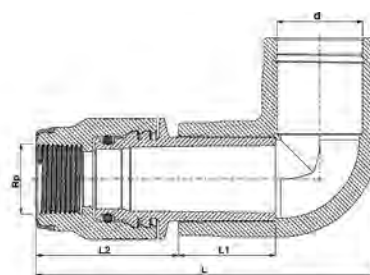

Product Code	Size d x Rp	L	L1	L2	A	UC	W
4935N4020005	20 x 1/2"	121	35	51	54		
4935N4020007	20 x 3/4"	122	35	52	54		
4935N4020010	20 x 1"	123	35	53	54		
4935N4025005	25 x 1/2"	121	35	51	54		
4935N4025007	25 x 3/4"	122	35	52	54		
4935N4025010	25 x 1"	123	35	53	54		
4925N4032010	32 x 1"	150	44	66	41		
4935N4032013	32 x 1 1/4"	152	44	68	41		
4935N4040010	40 x 1"	164	48	67	45		
4935N4040013	40 x 1 1/4"	165	48	68	45		
4935N4050015	50 x 1 1/2"	198	49	88	50		
4935N4050020	50 x 2"	201	49	91	50		
4935N4063015	63 x 1 1/2"	217	58	85	56		
4935N4063020	63 x 2"	220	58	88	56		

45° PA Female Elbow

4936N4

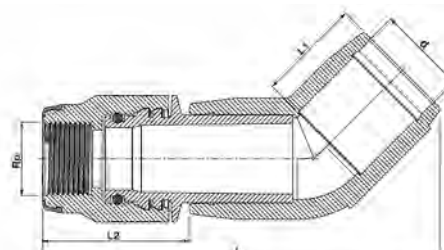


Product Code	Size d x Rp	L	L1	L2	A	UC	W
4936N4032010	32 x 1"	169	44	66	41		
4936N4032013	32 x 1 1/4"	171	44	68	41		
4936N4040010	40 x 1"	182	48	67	45		
4936N4040013	40 x 1 1/4"	183	48	68	45		
4936N4050015	50 x 1 1/2"	213	49	88	50		
4936N4050020	50 x 2"	216	49	91	50		
4936N4063015	63 x 1 1/2"	235	58	85	56		
4936N4063020	63 x 2"	238	58	88	56		

PE Ball Valve

436207

Válvula de Bola PE




Product Code	Size d	dp	s	L	L1	B	E	E1	H	H1	h	C	V	U	UC	W
436207025	25*	19	3	300	103	65	80	70	94	50	40	39	50	26	12	705
436207032	32*	24	3	300	103	65	80	70	94	50	40	39	50	26	12	855
436207040	40	24	4	300	103	65	80	70	94	50	40	39	50	26	12	758
436207050	50*	39	6	414	130	87	120	85	160	80	40	54	50	26	4	2091
436207063	63*	48	6	414	130	87	120	85	160	80	40	54	50	26	4	2061
436207075	75	48	8	414	130	87	120	85	160	80	40	54	50	26	4	2558
436207090	90*	70	8	550	176	93	200	85	200	110	40	90	50	26	2	5865
436207110	110*	86	10	550	178	93	200	85	200	110	40	90	50	26	2	5761
436207125	125	86	12	550	182	93	200	85	200	110	40	90	50	26	2	6400
436207160	160	86	16	550	182	93	200	85	200	110	40	90	50	26	2	7100

* Full Bore Dimensions | * Dimensiones de cavidad única

PE Ball Valve with Two Purges

4362Q7

PE Ball Válvula de Bola con purga



Product Code	Size d	d1	A	H	H1	L	L1	B	Dp	S	I	E	E1	h	c	UC	W
4362Q7090	90	32	146	200	110	550	176	107	70	9	251	187	85	40	90	2	5606
4362Q7110	110	32	146	200	110	550	176	107	84	10	251	188	85	40	90	2	5784

Tapping Valve

4954S4*/495404


Toma de Servicio con Válvula



63mm up to 180mm



200mm up to 250mm

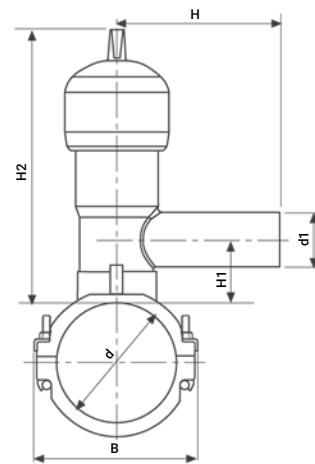

Product Code	Size d x d1	B	H	H1	H2	L	UC	W
495404063032	63 x 32	99	126	46	244	118	8	2090
495404063040	63 x 40	99	137	46	244	118	8	2103
495404063050	63 x 50	99	152	51	244	118	8	2140
495404063063	63 x 63	99	186	51	244	118	8	2205
495404075032	75 x 32	117	126	46	244	118	8	2100
495404075040	75 x 40	117	137	46	244	118	8	2113
495404075050	75 x 50	117	152	51	244	118	8	2150
495404075063	75 x 63	117	186	51	244	118	8	2215
495404090032	90 x 32	126	126	46	244	118	8	2150
495404090040	90 x 40	126	137	46	244	118	8	2163
495404090050	90 x 50	126	152	51	244	118	8	2200
495404090063	90 x 63	126	186	51	244	118	8	2265
495404110032	110 x 32	148	126	46	244	118	8	2267
495404110040	110 x 40	148	137	46	244	118	8	2250
495404110050	110 x 50	148	152	51	244	118	8	2280
495404110063	110 x 63	148	186	51	244	118	8	2345
495404125032	125 x 32	162	126	46	244	118	8	2277
495404125040	125 x 40	162	137	46	244	118	8	2290
495404125050	125 x 50	162	152	51	244	118	8	2327
495404125063	125 x 63	162	186	51	244	118	8	2392
495404140032	140 x 32	180	126	46	244	118	8	2285
495404140040	140 x 40	180	137	46	244	118	8	2298
495404140050	140 x 50	180	152	51	244	118	8	2335
495404140063	140 x 63	180	186	51	244	118	8	2441
495404160032	160 x 32	202	126	46	244	118	8	2377
495404160040	160 x 40	202	137	46	244	118	8	2390
495404160050	160 x 50	202	152	51	244	118	8	2427
495404160063	160 x 63	202	186	51	244	118	8	2492
495404180032	180 x 32	220	126	46	244	118	8	2440
495404180040	180 x 40	220	137	46	244	118	8	2453
495404180050	180 x 50	220	152	51	244	118	8	2490
495404180063	180 x 63	220	186	51	244	118	8	2555
495404200032	200 x 32	202	126	46	244	176	5	2431
495404200040	200 x 40	202	137	46	244	176	5	2444
495404200050	200 x 50	202	152	51	244	176	5	2481
495404200063	200 x 63	202	186	51	244	176	5	2546
495404225032	225 x 32	227	126	46	244	176	5	2448
495404225040	225 x 40	227	137	46	244	176	5	2501
495404225050	225 x 50	227	152	51	244	176	5	2538
495404225063	225 x 63	227	186	51	244	176	5	2603
495404250032	250 x 32	252	126	46	244	176	5	2504
495404250040	250 x 40	252	137	46	244	176	5	2517
495404250050	250 x 50	252	152	51	244	176	5	2554
495404250063	250 x 63	252	186	51	244	176	5	2619

* Tapping Valve with serrated edge cutter.

* Toma de servicio con bordes "dientes de sierra".


Male Transition Coupler

492104


Enlace de Transición Macho



Type A



Type B



Product Code	Size d x R	Type	L	L1	L2	D	A	UC	W
492104020005	20 x 1/2"	A	105	37	29	14	34	200	129
492104025007	25 x 3/4"	A	111	40	29	19	37	150	150
492104032005	32 x 1/2"	A	110	39	29	23	42	100	142
492104032007	32 x 3/4"	A	110	39	29	23	42	100	263
492104032010N	32 x 1"	B	140	44	50	22	43	100	285
492104032013	32 x 1 1/4"	A	124	42	36	23	42	60	393
492104032015	32 x 1 1/2"	A	124	42	36	23	42	60	404
492104040010N	40 x 1"	B	143	48	45	22	46	72	409
492104040013N	40 x 1 1/4"	B	153	48	55	30	46	54	470
492104040015	40 x 1 1/2"	A	133	47	36	29	46	54	483
492104040020N	40 x 2"	B	160	44	41	29	59	36	500
492104050010	50 x 1"	A	135	49	34	38	51	48	513
492104050013	50 x 1 1/4"	A	137	49	36	38	51	48	569
492104050015N	50 x 1 1/2"	B	164	49	63	35	51	48	547
492104050020N	50 x 2"	B	160	49	41	38	59	30	752
492104063013	63 x 1 1/4"	A	153	57	36	48	57	30	884
492104063015	63 x 1 1/2"	A	153	57	36	48	57	30	845
492104063020N	63 x 2"	B	186	57	69	47	58	30	921
492104075020	75 x 2"	A	167	61	41	59	64	16	1305
492104075025	75 x 2 1/2"	A	172	61	46	59	64	16	1512


Female Transition Coupler

493104


Enlace de Transición Hembra



Type A

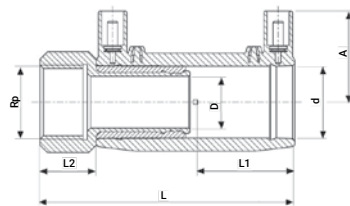

Type B




Product Code	Size d x Rp	Type	L	L1	L2	D	A	UC	W
493104020005	20 x 1/2"	A	96	37	20	14	35	200	130
493104025007	25 x 3/4"	A	105	40	23	19	38	150	145
493104025010N	25 x 1"	B	108	34	28	23	42	80	252
493104032007	32 x 3/4"	A	124	39	23	19	42	100	159
493104032010N	32 x 1"	B	130	44	40	27	43	100	265
493104032013	32 x 1 1/4"	A	118	39	28	29	47	54	507
493104032015	32 x 1 1/2"	A	124	39	25	38	47	50	455
493104040010	40 x 1"	A	122	47	25	29	46	54	507
493104040013	40 x 1 1/4"	A	122	47	25	29	46	54	407
493104040015	40 x 1 1/2"	A	122	47	25	29	46	48	419
493104040020N	40 x 2"	B	150	44	32	38	59	32	821
493104050015	50 x 1 1/2"	A	126	49	25	38	51	48	491
493104050020	50 x 2"	A	131	49	30	38	51	40	685
493104063015	63 x 1 1/2"	A	145	59	26	38	59	24	558
493104063020N	63 x 2"	B	179	57	62	49	58	30	840


90° Male Transition Elbow

492504

90° Codo de Transición de Macho

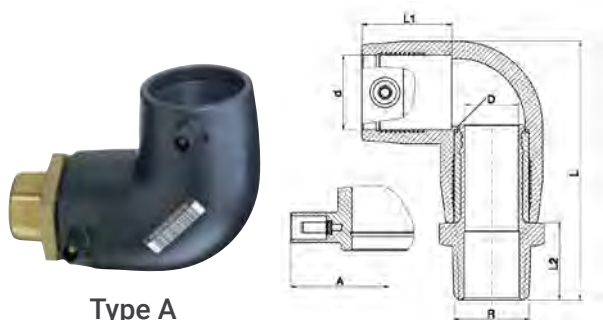

Type A

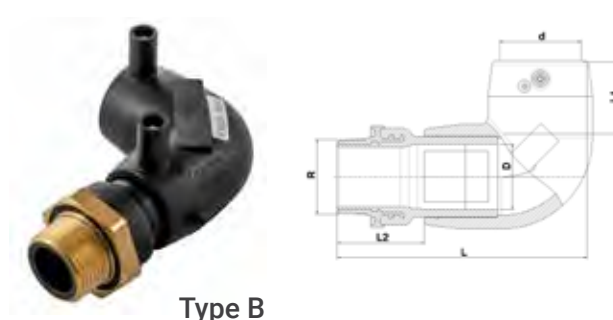


Type B

Product Code	Size d x R	Type	L	L1	L2	D	A	UC	W
492504020005	20 x 1/2"	A	95	35	29	14	38	150	153
492504025007	25 x 3/4"	A	95	37	29	19	38	120	168
492504032005	32 x 1/2"	A	112	40	29	23	43	84	294
492504032007	32 x 3/4"	A	112	40	29	23	43	84	262
492504032010N	32 x 1"	B	134	44	49	22	47	84	300
492504032013	32 x 1 1/4"	A	119	40	36	23	43	60	419
492504032015	32 x 1 1/2"	A	119	40	36	23	43	60	436
492504040010N	40 x 1"	B	142	44	49	22	47	48	458
492504040013N	40 x 1 1/4"	B	153	44	59	30	47	48	500
492504040015	40 x 1 1/2"	A	128	44	36	29	47	48	510
492504040020	40 x 2"	A	133	44	41	29	47	48	725
492504050010	50 x 1"	A	142	48	34	38	52	42	624
492504050013	50 x 1 1/4"	A	144	48	36	38	52	36	679
492504050015N	50 x 1 1/2"	B	174	49	63	35	52	36	655
492504050020	50 x 2"	A	149	48	41	38	52	30	806
492504063013	63 x 1 1/4"	A	167	57	36	48	59	24	985
492504063015	63 x 1 1/2"	A	167	57	36	48	59	24	1040
492504063020N	63 x 2"	B	200	58	68	47	57	24	1015
492504075020	75 x 2"	A	199	69	41	59	62	16	1450
492504075025	75 x 2 1/2"	A	204	69	46	59	62	16	1649

90° Female Transition Elbow

493504

90° Codo de Transición de Hembra

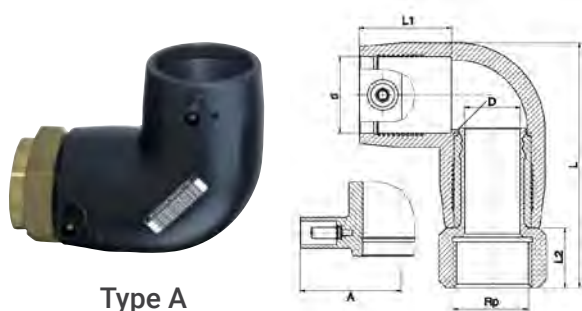

Type A



Type B

Product Code	Size d x Rp	Type	L	L1	L2	D	A	UC	W
493504020005	20 x 1/2"	A	86	35	20	14	38	160	142
493504025007	25 x 3/4"	A	89	37	23	19	38	120	160
493504032007	32 x 3/4"	A	108	40	25	23	43	96	280
493504032010N	32 x 1"	B	123	39	42	27	42	96	280
493504032015	32 x 1 1/2"	A	108	40	25	23	43	96	360
493504040010	40 x 1"	A	117	44	25	29	47	48	535
493504040013	40 x 1 1/4"	A	117	44	25	29	47	48	432
493504040015	40 x 1 1/2"	A	117	44	25	29	47	48	453
493504050015	50 x 1 1/2"	A	133	48	25	38	52	48	560
493504050020	50 x 2"	A	138	48	30	38	52	40	744
493504063015	63 x 1 1/2"	A	161	57	30	48	59	24	1072
493504063020N	63 x 2"	B	193	58	62	49	57	24	959

45° Male Transition Elbow

492604

45° Codo de Transición de Macho



Product Code	Size d x R	Type	L	L1	L2	D	A	UC	W
492604032005	32 x 1/2"	A	124	39	29	23	43	84	249
492604032007	32 x 3/4"	A	123	39	29	23	43	84	250
492604032010N	32 x 1"	B	151	39	50	22	42	72	375
492604032013	32 x 1 1/4"	A	130	39	36	23	43	48	479
492604032015	32 x 1 1/2"	A	130	39	36	23	43	48	488
492604040010N	40 x 1"	B	158	48	45	22	47	60	433
492604040013N	40 x 1 1/4"	B	168	48	55	30	47	60	485
492604040015	40 x 1 1/2"	A	144	44	36	29	47	48	510
492604040020	40 x 2"	A	149	44	41	29	47	40	685
492604050010	50 x 1"	A	161	49	34	38	51	48	564
492604050013	50 x 1 1/4"	A	161	49	36	38	51	48	610
492604050015N	50 x 1 1/2"	B	185	49	63	35	52	48	600
492604050020	50 x 2"	A	165	49	41	38	51	30	778
492604063013	63 x 1 1/4"	A	184	57	36	48	59	24	927
492604063015	63 x 1 1/2"	A	184	57	36	48	59	24	893
492604063020N	63 x 2"	B	215	58	68	47	57	24	953
492604075020	75 x 2"	A	221	71	41	59	62	16	1399
492604075025	75 x 2 1/2"	A	226	71	46	59	62	16	1600

45° Female Transition Elbow

493604

45° Codo de Transición de Hembra




Product Code	Size d x Rp	Type	L	L1	L2	D	A	UC	W
493604032007	32 x 3/4"	A	120	39	25	23	43	—	320
493604032010N	32 x 1"	B	141	44	40	27	42	72	342
493604032015	32 x 1 1/2"	A	120	39	25	23	43	72	488
493604040010	40 x 1"	A	133	44	25	29	47	48	510
493604040013	40 x 1 1/4"	A	133	44	25	29	47	48	419
493604040015	40 x 1 1/2"	A	133	44	25	29	47	48	479
493604050015	50 x 1 1/2"	A	150	49	25	38	51	48	532
493604050020	50 x 2"	A	155	49	30	38	51	36	702
493604063015	63 x 1 1/2"	A	178	57	30	48	59	24	1019
493604063020N	63 x 2"	B	208	58	62	49	57	24	912

Female Free Nut Transition Coupler*

494104

Enlace de Transición, Tuerca Libre, Hembra



Product Code	Size d x G	L	L1	L2	D	A	UC	W
494104020007	20 x 3/4"	106	37	30	14	34	200	160
494104025007	25 x 3/4"	112	40	30	14	37	140	150
494104025010	25 x 1"	115	40	33	19	37	140	200
494104032007	32 x 3/4"	100	39	20	14	42	100	164
494104032010	32 x 1"	124	42	36	19	42	100	260
494104032013	32 x 1 1/4"	124	42	36	23	42	78	310
494104040010	40 x 1"	115	44	25	19	47	100	278
494104040013	40 x 1 1/4"	113	44	23	23	47	52	320
494104040015	40 x 1 1/2"	135	47	38	29	45	52	444
494104050010	50 x 1"	136	49	36	19	52	32	700
494104050013	50 x 1 1/4"	120	49	23	23	52	70	371
494104050015	50 x 1 1/2"	123	49	25	29	52	32	484
494104050020	50 x 2"	141	49	41	38	52	32	709
494104063020	63 x 2"	161	57	44	38	57	28	770
494104063025	63 x 2 1/2"	166	57	49	48	57	20	1154


* May be converted into male free nut by addition of a threaded nipple.

* Se puede convertir en la tuerca loca macho mediante la adición de un niple roscado.

90° Female Free Nut Transition Elbow*

494504

90° Codo de Transición de Tuerca Libre, Hembra



Product Code	Size d x G	L	L1	L2	D	A	UC	W
494504020007	20 x 3/4"	96	35	30	14	38	140	164
494504025007	25 x 3/4"	96	37	30	14	38	140	164
494504025010	25 x 1"	99	37	33	19	38	105	164
494504032010	32 x 1"	119	40	36	19	43	70	164
494504032013	32 x 1 1/4"	119	40	36	23	43	70	324
494504040015	40 x 1 1/2"	132	44	40	29	47	48	490
494504050020	50 x 2"	149	48	41	38	52	30	779
494504063020	63 x 2"	175	57	44	41	59	16	1024
494504063025	63 x 2 1/2"	180	57	49	48	59	16	1245


* May be converted into male free nut by addition of a threaded nipple.

* Se puede convertir en la tuerca loca macho mediante la adición de un niple roscado.

45° Female Free Nut Transition Elbow*

494604

45° Codo de Transición de Tuerca Libre, Hembra



Product Code	Size d x G	L	L1	L2	D	A	UC	W
494604032010	32 x 1"	131	39	36	19	43	70	164
494604032013	32 x 1 1/4"	129	39	34	23	47	56	400
494604040015	40 x 1 1/2"	146	44	38	29	47	48	469
494604050020	50 x 2"	166	49	41	38	51	30	740
494604063020	63 x 2"	189	57	41	38	59	24	164
494604063025	63 x 2 1/2"	197	57	44	48	59	16	1184


* May be converted into male free nut by addition of a threaded nipple.

* Se puede convertir en la tuerca loca macho mediante la adición de un niple roscado.

Female Union Free Nut Transition Tee

494404

Enlace T, PE/Latón, Tuerca Libre, Hembra




Product Code	Size d x G	L	L1	D	H	A	UC	W
494404032010	32 x 1"	104	39	44	88	43	50	320

PE Male Transition Coupler

497104

Enlace de Transición PE Macho




Product Code	Size d x R	L	L1	D	A	UC	W
497104020005	20 x 1/2"	97	21	14	34	200	129
497104025007	25 x 3/4"	113	31	18	37	200	61
497104032010	32 x 1"	123	35	24	42	200	92
497104040010	40 x 1"	134	37	30	46	128	146
497104040013	40 x 1 1/4"	137	40	30	46	128	152
497104040015	40 x 1 1/2"	137	40	30	46	128	159
497104050015	50 x 1 1/2"	141	40	38	51	96	238
497104063015	63 x 1 1/2"	161	44	48	57	40	371
497104063020	63 x 2"	165	48	48	57	40	450

90° PE Male Transition Elbow

497504

90° Codo de Transición PE de Macho




Product Code	Size d x R	L	L1	D	A	L2_Cap	UC	W
497504020005	20 x 1/2"	87	35	14	38	21	160	78
497504025007	25 x 3/4"	97	37	18	38	31	200	75
497504032010	32 x 1"	118	40	24	43	35	96	120
497504040010	40 x 1"	129	44	30	47	37	48	458
497504040013	40 x 1 1/4"	132	44	30	47	40	48	202
497504040015	40 x 1 1/2"	132	44	30	47	40	48	250
497504050015	50 x 1 1/2"	148	48	38	52	40	48	296
497504063015	63 x 1 1/2"	175	57	48	59	44	44	458
497504063020	63 x 2"	179	57	48	59	48	44	490

45° PE Male Transition Elbow

497604

45° Codo de Transición PE de Macho




Product Code	Size d x R	L	L1	D	A	L2_Cap	UC	W
497604032010	32 x 1"	141	39	24	43	35	96	150
497604040010	40 x 1"	145	42	30	47	37	96	175
497604040013	40 x 1 1/4"	148	42	30	47	40	96	185
497604040015	40 x 1 1/2"	148	42	30	47	40	96	185
497604050015	50 x 1 1/2"	165	49	38	51	40	48	271
497604063015	63 x 1 1/2"	192	57	48	59	44	24	465
497604063020	63 x 2"	196	57	48	59	48	24	470

PE Cast Iron Flange Transition Coupler

497704

Enlace de Transición Bridado - PE Hierro Fundido

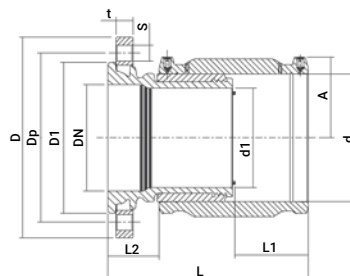


Product Code	Size d x DN	A	L	L1	L2	D1	d1	D	Dp	s	t	No. of holes	UC	W
497704063	63 x 50	57	217	57	100	104	43	165	125	18	20	4	4	4200
497704090	90 x 80	70	216	73	68	139	67	200	160	18	20	8	4	5779
497704110	110 x 100	79	223	80	61	159	84	220	180	18	22	8	4	7280
497704125	125 x 100	87	235	85	62	159	98	220	180	18	22	8	4	7759
497704160	160 x 150	105	268	93	73	215	125	285	240	22	24	8	1	13400
497704180	180 x 150	116	284	105	72	215	140	285	240	22	24	8	1	15246
497704225	225 x 200	138	314	119	74	270	176	340	295	22	26	12	1	23919

PE Cast Iron Spigot Transition Coupler

495704

Enlace de Transición Espiga - PE Hierro Fundido

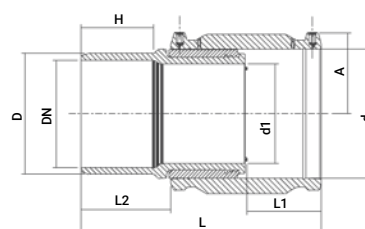


Product Code	Size d x DN	A	L	L1	L2	D	d1	H	UC	W
495704090080	90 x 80	69	254	73	106	98	67	94	8	2874
495704125100	125 x 100	87	280	85	107	118	98	91	4	4569
495704160150	160 x 150	104	322	97	124	170	125	102	2	8105
495704180150	180 x 150	114	339	104	127	170	140	103	2	10121
495704225200	225 x 200	140	372	118	132	222	176	109	1	12284

Full Face Flange

490209

Brida de Cara Plana

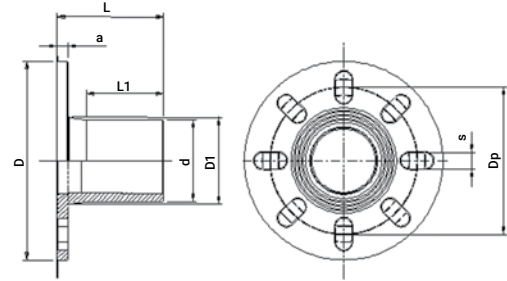


Product Code	Size d	L	L1	D	D1	a	Dp	s	UC	W
490209090	90	118	86	220	98	12	163	20	18	540

Stub Flange

490207

Adaptador de Brida




Product Code	Size d	L	L1	a	D	D1	UC	W
490207020	20	85	45	7	45	26	160	26
490207025	25	85	40	9	58	32	160	42
490207032	32	85	60	10	68	40	160	59
490207040	40	85	60	11	78	50	160	84
490207050	50	104	75	12	88	61	144	104
490207063	63	120	87	14	102	75	60	220
490207075	75	130	92	16	122	89	48	322
490207090	90	140	96	17	138	105	32	475
490207110	110	160	110	18	158	125	20	643
490207125	125	182	132	25	158	132	16	945
490207140	140	180	130	25	188	155	12	1245
490207160	160	180	130	25	212	175	8	1600
490207180	180	198	140	30	212	187	4	1990
490207200	200	200	135	32	268	232	4	3100
490207225	225	200	135	32	268	235	4	3360
490207250	250	215	145	35	320	285	3	5080
490207280	280	228	160	35	320	291	2	5688
490207315	315	238	160	35	370	335	1	7785
490207355	355	255	175	40	430	373	1	10400
490207400	400	286	195	45	482	427	1	14970

Flange Backing Ring

09903

Brida Revestida



Product Code	Flange Type	Flange (DN)	D	Dp	D1	s	t	No. of Holes	UC	W
09903020	ISO/DIN PN 10/16	20 x 1/2" (DN15)	95	65	28	14	12	4	200	240
09903025	ISO/DIN PN 10/16	25 x 3/4" (DN20)	105	75	34	14	14	4	180	300
09903032	ISO/DIN PN 10/16	32 x 1" (DN25)	115	85	42	14	16	4	150	495
09903040	ISO/DIN PN 10/16	40 x 1 1/4" (DN32)	140	100	51	18	18	4	120	685
09903050	ISO/DIN PN 10/16	50 x 1 1/2" (DN40)	150	110	62	18	18	4	100	812
09903063	ISO/DIN PN 10/16	63 x 2" (DN50)	165	125	78	18	17	4	20	1110
09903075	ISO/DIN PN 10/16	75 x 2 1/2" (DN65)	185	145	92	18	18	4	20	1205
09902095	ISO/DIN PN 10/16	90 x 2 1/2" (DN65)	185	145	102	18	20	8	10	2,552
09903090	ISO/DIN PN 10/16	90 x 3" (DN80)	200	160	108	18	20	8	20	1400
09903110	ISO/DIN PN 10/16	110 x 4" (DN100)	220	180	128	18	20	8	20	1570
09903125	ISO/DIN PN 10/16	125 x 4" (DN100)	220	180	135	18	20	8	15	1470
09903140	ISO/DIN PN 10/16	140 x 5" (DN125)	250	210	158	18	24	8	12	1930
09903160	ISO/DIN PN 10/16	160 x 6" (DN150)	285	240	178	22	24	8	6	3625
09903180	ISO/DIN PN 10/16	180 x 6" (DN150)	285	240	188	22	24	8	10	2150
09903200	ISO/DIN PN 10	200 x 8" (DN200)	340	295	236	22	24	8	4	3600
09903225	ISO/DIN PN 10	225 x 8" (DN200)	340	295	239	22	24	8	8	3510
09903250	ISO/DIN PN 10	250 x 10" (DN250)	395	350	288	22	30	12	8	5200
09901250	BS 10 Table D	250 x 10" BS	395	355	288	22	26	8	1	10,055
09903280	ISO/DIN PN 10	280 x 10" (DN250)	395	350	294	22	30	12	8	5500
09901280	BS 10 Table D	280 x 10" BS	395	355	294	22	26	8	1	10,055
09903315	ISO/DIN PN 10	315 x 12" (DN300)	445	400	338	22	34	12	3	8350
09901315	BS 10 Table D	315 x 12" BS	445	406	338	22	26	12	1	10,055
09903355	ISO/DIN PN 10	355 x 14"	—	460	376	—	39	16	2	20000
09901355	BS 10 Table D	355 x 14" BS	520	470	376	26	28	12	1	10,055

Wastewater System, We Make the Connection

Polyethylene offers the ideal cost-effective and technically superior alternative to other materials, requiring minimal effort to install, reducing the number of connections required and increasing the system lifespan.

The PLASSON System constitutes an excellent investment for both public wastewater infrastructures and private wastewater systems

The PLASSON wastewater system offers a strong, long-life and is resistant to axial loads through its special versatile products that can be completely fused after being laid.



Systemas de Aguas Residuales, Hacemos la Conexión


En comparación con otros materiales, el polietileno constituye la alternativa ideal en términos de costo-beneficio y superioridad técnica, ya que requiere un mínimo esfuerzo de instalación, con menos conexiones, y asegura una larga vida útil. El sistema de PLASSON es una inversión excelente, tanto para las infraestructuras públicas de aguas residuales como para los sistemas privados.

Los sistemas de PLASSON para aguas residuales son muy duraderos y resistentes a las cargas axiales, gracias a la versatilidad de sus productos que pueden fusionarse completamente después de la instalación.

Wastewater Adjustable Saddle*

475804

Ramal Para Aguas Residuales*

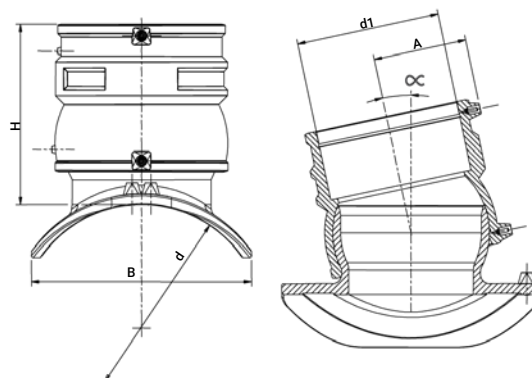


Product Code	Size d x d1	B	H	A	L	UC	W
475804200160	200 x 160	208	202	105	290	4	2050
475804250160	225-250 x 160	225	202	105	290	4	2060
475804315160	280-315 x 160	247	202	105	290	4	2070
475804560160	355-560 x 160	263	202	105	290	4	2080
475804710160	560-710 x 160	277	202	105	290	4	2100

* See dedicated tools at "specialized installation tools for Plasson products" section, page 187 | * Consulte las herramientas necesarias y específicas en la sección "Herramientas especiales para la instalación de productos Plasson", página 187.

Wastewater Saddle 45° - Inlet 110*

4758A4

Ramal 45° de Salida Para Aguas Residuales*

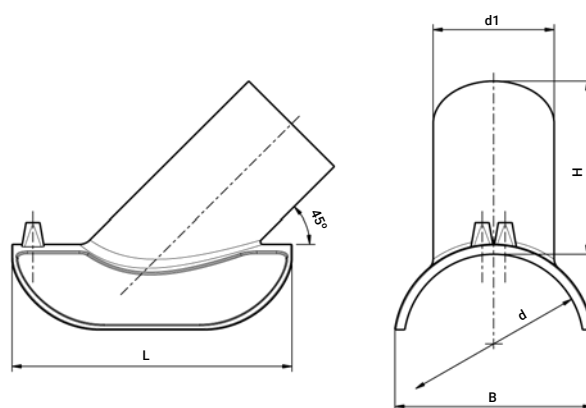


Product Code	Size d x d1	L	B	H	UC	W
4758A4160110	160-200 x 110	255	182	158	10	710
4758A4250110	225-315 x 110	255	221	158	10	656

* See dedicated tools at "specialized installation tools for Plasson products" section, page 187 | * Consulte las herramientas necesarias y específicas en la sección "Herramientas especiales para la instalación de productos Plasson", página 187.

Wastewater Saddle PVC/PP Adaptor Inlet*

4758V4

Collarín lightfit de transición para aguas residuales de PE A PP/PVC *

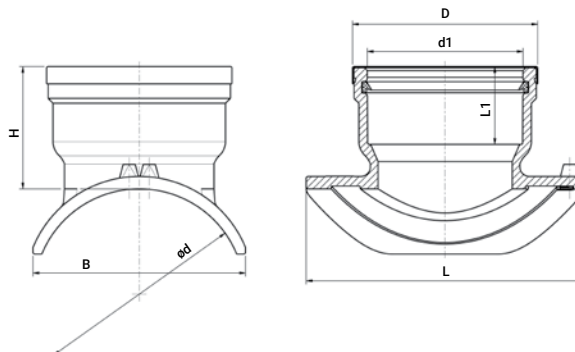


Product Code	Size d x d1	B	H	L	L1	D	UC	W
4758V4200160	200 x 160	208	125	290	80	190	6	1660
4758V4250160	225-250 x 160	225	125	290	80	190	6	1309
4758V4315160	280-315 x 160	245	125	290	80	190	6	1326
4758V4560160	355-560 x 160	263	125	290	80	190	6	1430
4758V4710160	560-710 x 160	277	125	290	80	190	6	1527

* See dedicated tools at "specialized installation tools for Plasson products" section, page 187 | * Consulte las herramientas necesarias y específicas en la sección "Herramientas especiales para la instalación de productos Plasson", página 187.

Wastewater Saddle Spigot Inlet*

4758S4

Collarín lightfit de transición para aguas residuales de PE /PE*

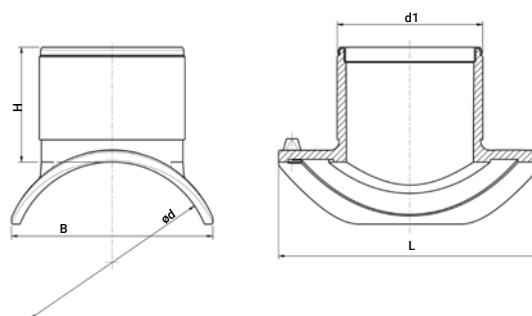


Product Code	Size d x d1	B	H	L	UC	W
4758S4200160	200 x 160	208	125	290	6	1091
4758S4250160	225 - 250 x 160	225	125	290	6	1239
4758S4315160	280 - 315 x 160	247	125	290	6	1260
4758S4560160	355 - 560 x 160	263	125	290	6	1300
4758S4710160	560 - 710 x 160	277	125	290	6	1310

* See dedicated tools at "specialized installation tools for Plasson products" section, page 187 | * Consulte las herramientas necesarias y específicas en la sección "Herramientas especiales para la instalación de productos Plasson", página 187.

Wastewater Adjustable Elbow One Sided

4747D4

Codo Ajustable Para Aguas Residuales

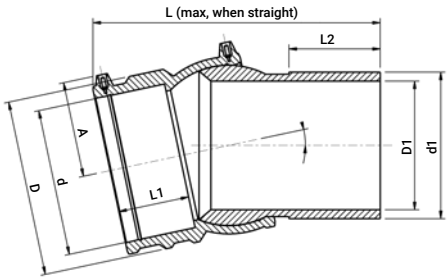


Product Code	size dxd1	SDR	D	D1	L	L1	L2	A	UC	W
4747D4160	160	17	193	141	298	78	98	105	6	3030

Wastewater Manhole Adaptor

37020/477207

Adaptador Para Pozo de Aguas Residuales




Product Code	Size d	L	d1	D	H	UC	W
37020110	110	135	97	216	37	—	1650
37020125	125	135	111	235	39	—	1800
37020140	140	135	123	254	39	—	1950
477207160	160	135	141	280	39	6	2524
37020180	180	135	157	335	66	4	3550
37020200	200	135	176	355	56	2	3660
477207225	225	135	198	355	44	2	3902
37020250	250	135	220	400	54	2	3740
477207280	280	135	247	400	39	2	5027
37020315	315	135	278	450	46	2	5130
37020355	355	135	313	500	50	2	6480
37020400	400	135	353	560	59	1	8260
37020450	450	135	397	592	50	—	22350
37020500	500	135	441	651	54	—	23600
37020560	560	135	494	705	51	—	34500
37020630	630	135	555	773	50	—	47370

Wastewater PE to PVC Adaptor

4701V4

Adaptador Para PE A PVC




Product Code	Size d	L	L1	L2	D	A	UC	W
4701V4160	160	187	90	77	193	106	6	1546

Wastewater Adjustable Elbow PE to PVC

4747V4

Codo Ajustable de Transicion de PE a PVC

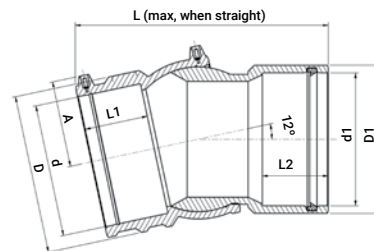


Product Code	Size d x d1	D	D1	L	L1	L2	A	UC	W
4747V4160	160 x 160	193	180	253	78	80	105	6	2140

45° Wastewater Elbow

470604

45° Codo Para Aguas Residuales

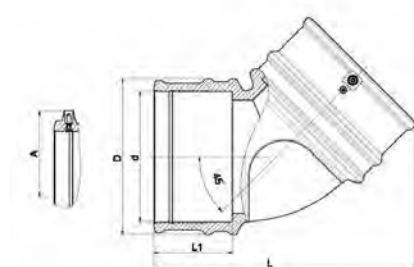


Product Code	Size d	L	L1	D	A	UC	W
470604160	160	325	98	193	106	4	2000

30° Wastewater Elbow

473304

30° Codo Para Aguas Residuales

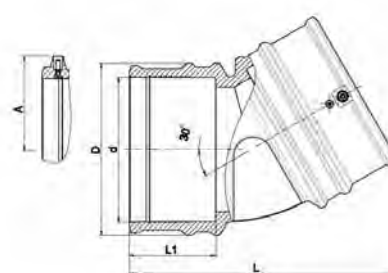


Product Code	Size d	L	L1	D	A	UC	W
473304160	160	302	98	193	106	5	1850

15° Wastewater Elbow

473704

15° Codo Para Aguas Residuales

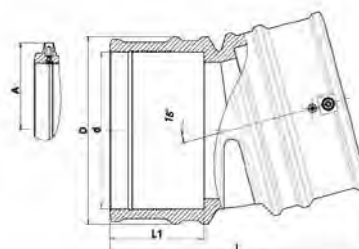

Product Code	Size d	L	L1	D	A	UC	W
473704160	160	267	98	193	106	5	1740

Technical Specifications for PLASSON Electrofusion Fittings

Fitting Pressure Rating and Pipe Compatibility

PLASSON Fittings are weldable to PE80, PE100, PE100-RC and PE-X pipes (most fittings)*.

Check that the pipe SDR is compatible with the PLASSON fittings.

The range of compatible pipe SDR's for each specific fitting is defined on the fitting barcode label.

For questions regarding pipe SDR compatibility refer to PLASSON literature or contact your local PLASSON representative.

* Please consult your PLASSON representative

The following is a general guideline for PLASSON EF product pipe SDR compatibility (in any case of discrepancy between the figure below and the figure on the barcode label, always refer to the barcode data).

PLASSON's Electrofusion Fittings:

- PN 16 (Water)
- PE100 SDR11 (Gas)
- Up to 75mm (inclusive) are Weldable to Pipes SDR ≤ 11
- Elbows and Tees of main diameter 40mm-75mm ≤ 17
- 90mm & Up are Weldable to Pipes SDR ≤ 17
- 63-75mm Tapping Saddles and Valves are suitable for SDR11

Note: for tapping SDR ≤ 11 pipes (size 63 and up), please consult your PLASSON representative.

LightFit:

- PN 10 (Water)
- PE100 SDR17 (Gas)
- 40mm - 75mm are Weldable to Pipes SDR ≤ 17
- 90mm are Weldable to Pipes SDR ≤ 26
- 110mm - 710mm are Weldable to Pipes SDR ≤ 33
- 800mm and up are weldable to pipes SDR ≤ 41

Wastewater Saddle

- PN 0.5 (Water)
- 200mm & Up are Weldable to Pipes SDR ≤ 26

Wastewater Adjustable Elbow

- PN 0.5 (Water)
- 160mm is Weldable to Pipes SDR ≤ 17

Measure the pipe external diameter toward the pipe end using a Pi tape. The pipe external diameter must be within the tolerances defined in International standards such as ISO 4437-2, AS/NZS, 4130, EN 1555-2 and EN 12201-2.

Material

All PLASSON electrofusion fittings are produced from material class PE100 which conform to international standards for potable water and natural or suitable manufactured gas systems.

Standards

PLASSON electrofusion fittings are designed, tested and quality controlled according to PLASSON's internal standards. These standards are based on the following international standards:

EN 1555
EN 12201
NF 136
AS/NZS 4129
WIS 4-32-14
WIS 4-32-15

Quality

PLASSON has incorporated a quality assurance system in accordance with ISO 9001. Operating approval according to ISO 9001 was granted to PLASSON by the Israeli Standard Institute. Operating according to the ISO 9001 quality assurance system imposes stringent standards of control throughout the manufacturing processes.

Abbreviations used on the product description pages of this catalog:

A, A1	Height of shroud from centerline	L, L1, L2	Length
d, d1	Nominal diameter of fitting or outlet	c	Number of bolt holes in flanges
D, D1	Diameter	s	Diameter of bolt holes in flanges
DN	Nominal bore corresponding approximately to the inside diameter of the pipe	t	Thickness of metal flange
Dp	Pitch circle diameter of bolt holes in flanges	W	Weight in grams
G, R, Rp	Threaded outlet diameter	UC	Units per carton
H	Height	Fusion and cooling time are specified on the individual product.	

Whereas the products shown in this catalogue illustrate and describe the current state of their development, PLASSON reserves the right at all times to make such technical alterations as it shall see fit to its products. Although every care has been taken in the preparation of the information, specifications and other data included in this catalogue, we cannot rule out inadvertent errors or omissions. Purchasers should take into account possible deviations or variations which will not substantially diminish the functionality or performance of the products, and, in many cases, are designed to improve the same.

PLASSON® is the Registered Trademark of PLASSON Ltd. or PLASSON Maagan Michael Industries Ltd.
PLASSON's products are protected by patents, trademark, design and copyright laws.

Especificaciones técnicas para los accesorios ElectroFusión de PLASSON

Presiones nominales y compatibilidad con la tubería

Los accesorios electrofusión de PLASSON se pueden soldar a tuberías de materiales PE80, PE100, PE100-RC, PE-X (la mayoría de los accesorios)*

Por favor revise que el SDR de la tubería es compatible con el rango declarado en el código de barras del accesorio PLASSON. Cada accesorio PLASSON contiene esta información.

Nota: para obtener más información sobre SDR de tuberías vea la información del fabricante de la tubería a soldar y literatura de PLASSON. Ante cualquier duda consulte a su representante de PLASSON

A continuación una guía general sobre la compatibilidad de accesorios PLASSON según el SDR del tubo a electrofundir. (En caso de existir alguna discrepancia por favor proceda según indica la calcomanía del accesorio que contiene el código de barras).

Presiones nominales

Las presiones nominales de todos los accesorios electrofusión de PLASSON son las siguientes:

- PN 16 (Agua)
- MOP10 (Gas)

Accesorios de ElectroFusión de PLASSON

- Hasta 75mm (inclusive), soldables en tuberías SDR ≤ 11
- Codos y Tes en diámetros 40mm – 75mm ≤ 17
- De 90mm en adelante soldables en tuberías SDR ≤ 11
- De 63-75mm Tomas en carga y Válvulas soldables en tuberías SDR 11

NOTA: Para tuberías SDR ≤ 11 (diámetro desde 63mm hacia arriba) consulte a su representante de PLASSON.

LightFit:

- PN10 (Agua)
- PE100 SDR 17 (GAS)
- 40mm - 75mm soldables en tuberías SDR ≤ 17
- 90mm soldables en tuberías SDR ≤ 26
- 110mm - 800mm soldables en tuberías SDR ≤ 33

Ramales de ElectroFusión PLASSON para aguas residuales

- PN 0.5 (Agua)
- De 200mm en adelante en tuberías SDR ≤ 26

Codos ajustables de ElectroFusión para aguas residuales

- PN 0.5 (Agua)
- De 160mm en adelante en tuberías SDR ≤ 17

Para medir el diámetro externo de una tubería utilice una cinta PI. El diámetro externo debe estar contemplado dentro de las tolerancias estipuladas en las normas internacionales ISO 4437-2, AS/NZS.

Material

Todos los accesorios ElectroFusión de PLASSON se fabrican con material de clase PE100, de conformidad con las normas internacionales para sistemas de agua potable y gas natural o procesado. Accesorios de PE80, disponibles a petición del cliente.

Normativa

El diseño, las pruebas y el control de calidad de los accesorios electrofusión de PLASSON se llevan a cabo de acuerdo con las normas internas de PLASSON, basadas en las siguientes normativas internacionales:

EN 1555
EN 12201
NF 136
AS/NZS 4129
WIS 4-32-14
WIS 4-32-15

Aseguramiento de Calidad

PLASSON utiliza el sistema de aseguramiento de calidad conforme a la normativa ISO 9001. La certificación de la empresa de acuerdo con ISO 9001 le fue otorgada a PLASSON por el Instituto Israelí de Normas Industriales. La operación conforme a la normativa de aseguramiento de calidad ISO 9001 impone estrictos procedimientos de control durante todos los procesos de fabricación.

Abreviaturas utilizadas en la descripción de productos de este catálogo:

A, A1	Altura desde la línea central a la cubierta del resistor
d, d1	Diámetro nominal del accesorio o salida
D, D1	Diámetro
DN	Diámetro nominal interno, correspondiente aproximadamente al diámetro interno del tubo
Dp	Diámetro de los orificios en las bridas
G, R, Rp	Diámetro de la salida roscada
H	Altura

L, L1, L2	Longitud
c	Número de orificios en las bridas
s	Diámetro de los orificios p/tornillos en las bridas
t	Grosor de la brida metálica
W	Peso en gramos
UC	Cantidad por caja de cartón

Los tiempos de soldadura y enfriamiento se indican en cada producto.

Si bien en este catálogo se ilustran y describen los productos en el estado actual de su desarrollo, PLASSON se reserva el derecho de introducir en cualquier momento las modificaciones técnicas que considere convenientes.

La preparación de la información, especificaciones y otros datos se ha hecho con el mayor cuidado, no obstante lo cual no podemos asegurar que estén libres de errores u omisiones involuntarios. El cliente debe tener en cuenta la posibilidad de desviaciones o variaciones que no afectarán significativamente el funcionamiento o rendimiento de los productos y que, en muchos casos, están destinadas a mejorarlos.

PLASSON™ es la marca registrada de PLASSON Ltd. o PLASSON Maagan Michael Industries Ltd.

Los productos de PLASSON están protegidos por derechos de patente, marcas comerciales, diseño y leyes de copyright.

 **PLASSON**

The background of the entire page is a close-up photograph of industrial equipment. It shows a large, dark, circular metal flange with a brushed metal texture. Several red high-tension straps are wrapped around the flange, secured with metal buckles and clamps. The scene is set against a backdrop of rough, brown earth, suggesting a construction or mining environment. The lighting is bright, casting shadows that emphasize the textures of the metal and the straps.

ELECTROFUSION TOOLING

Content

Electrofusion Tooling - Herramientas Para Electrofusión

Pipe Preparation - Preparación de la tubería	172
What is PLASSON SMARTFUSE? - Que es PLASSON SMARTFUSE	174
Control Boxes - Controladores Electrofusión	175
Control Boxes Cont. - Características	178
Electrofusion Control Boxes & Accessories - Accesorios para controladores Electrofusión	180
Pipe Cutting - Cortadores de tuberías	181
Pipe Peeling - Rascadores de tuberías	182
Rerounding Tools - Redondeadores	184
Squeeze Off Tools - Prensas / Obturadores	185
Pipe Cleaning - Limpiadores de tubería	186
Pipe Clamping - Sujetadores	186
Specialized Installation Tooling For PLASSON Products - Sujetadores para la instalación de productos PLASSON	187
Large Bore Saddles Installation Tools - Sujetadores para la instalación de tomas simples/bridadas de gran diámetro / Ramales PLASSON	188
Tools for Drilling - Herramientas para perforación de tomas simples/bridadas de gran diámetro / Ramales PLASSON	190
Hot Tapping Tools - Herramientas para tomas en carga de grandes diámetros	190



PF-Schweißtechnologie GmbH (PFS)

PLASSON'S range of electrofusion tooling is designed and manufactured by our joint venture partner, PFS. Founded in 1997 in Germany, PFS quickly developed into one of the world's leading manufacturers of plastic welding technologies for pipeline construction. The product range includes a wide variety of electrofusion control units, butt fusion machines, extensive accessories and a complete portfolio of tools for the preparation of plastic pipes for welding.

High Quality Products

Thousands of customers around the globe rely on the high quality of PFS products.

Product development is conducted by employees with many years of experience, know-how, dedication and with a high capacity to innovate.

Close cooperation with end users of PFS products and systems provides real field feedback to allow refinement of products, even at component level, resulting in products robust enough to handle even the most difficult site conditions.



Turn your PLASSON Control Box into the ultimate welding machine with our **new Smartphone App.**

**GET
SMART**

THE PLASSON
FREE UPGRADE.
MAKING SMART
CONTROL BOXES
EVEN SMARTER.



Available now

Features of the Free Upgrade

- ✓ **Smartphone control** of your box, with no mobile network coverage needed
- ✓ **Improved quality control** with guided welding process and photo capture of crucial steps (kept with the weld record)
- ✓ **Data recording** including physical location of each weld
- ✓ Ability to **identify installer** of each weld
- ✓ Ability to **weld all fittings***



Smarter plumbing
with PLASSON.



*Monomatic Control Boxes will be limited to emergency welds of other fittings



Pipe Preparation | Preparación de la tubería

Pipe preparation is the basis of the electrofusion process.

The pipe preparation includes few simple yet important steps described below:

Cutting of the pipe:

The pipe ends must be cut square and even.

Various approved pipe cutting tools



1. Rotational pipe cutter



2. Pipe cutter



3. Rotational pipe cutter (S-type)

Marking and scraping:

In order to achieve a good weld the oxide layer of the pipe must first be removed.

Mechanical peeling tools are strongly preferred, as they achieve a consistent pipe surface preparation

Hand scraper

When using hand scrapers - perform long even scrapes starting from outside the marked areas to avoid "cratering" in the fusion zone of the fitting until all marks are removed.

Rotational scraper

One scraping pass is to be carried out in order to remove approx. 0.2 to 0.3 mm of the outer pipe surface. If the pipe diameter is still too large, additional scraping may be performed in order to facilitate insertion, as long as the average pipe diameter is kept above minimum.

This is the preferred peeling method as it will remove the pipe surface evenly.

Rotational Scraper / Hand scraper



1. Rotational scraper



2. Hand scraper



3. Do not touch the scraped area with bare hands after scraping and cleaning

Pipe rounding:

Electrofusion fittings are designed to work on a round pipe.

Do not perform an electrofusion weld if the pipe does not meet the criteria defined below at the section where the EF fitting is to be welded.

Use a pipe re-rounder if necessary to correct pipe ovality.

For pipe DN < 315

$d1 - d2 < 1.5\% \text{ DN or } < 3\text{mm}$ (whichever is the smallest value.)

For pipe DN ≥ 315


$d1 - d2 < 1\% \text{ DN or } < 5\text{mm}$ (whichever is the smallest value.)

It is extremely important to re-round the pipe

prior to the welding process.

In order to do so, measure the pipe diameter with a suitable measuring tool to find the maximum and minimum diameter points and calculate the difference between these diameters.

Pipe ovality (out of roundness) = $d1 - d2$

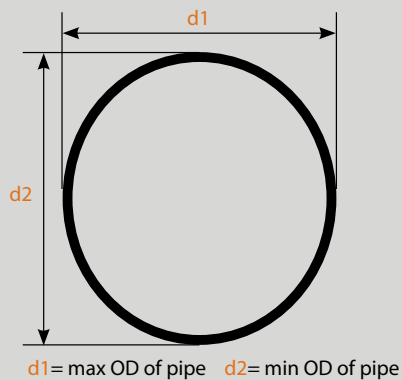

Clamping and alignment (fitting restraint):

Pipe movement during welding and cooling cycles might occur as well as sources of stress and strain that can be applied on the pipe/fitting assembly.

All electrofusion socket fittings (regardless of the manufacturer) must be clamped to the pipes in order to eliminate all mechanical stress in the welding zone.

Example of clamping and alignment device



1. Misaligned pipes



2. Example of clamping and alignment device

PLASSON SmartFuse Electrofusion System

What Is PLASSON SmartFuse?

SmartFuse is PLASSON's smart welding recognition system. By using a compatible PFS electrofusion controller, this system enables a simple identification of the electrofusion fittings to be welded and their welding time. Connecting the controller red cable to the red terminal pin initiates the identification. The controller reads the value of the resistor located in the red terminal pin and allocates the nominated welding time. All that is left for the operator to do is compare the welding time shown on the controller screen to that on the barcode label and press the "start" button on the controller to start the welding process! Simple, safe and reliable.

How Is This Done?

PLASSON electrofusion fittings are designed in a way that enables a single weld time in an ambient temperature range of -10°C up to +45°C. The weld energy will adjust "automatically" as function of the ambient temperature due to the metal coil electrical resistance which will change. At lower temperatures the coil resistance will decrease, resulting in higher energy applied to the weld, while at higher temperatures the energy will decrease.

No Temperature Compensation

Other fittings in the market compensate for the change in ambient temperature by changing the welding time, a system called temperature compensation. Temperature compensation is achieved by a specially defined barcode label, which instructs the welding controller to increase or decrease the weld time as function of the ambient temperature measured by the controller. Such system relies on the legibility of the barcode, and an assumption that the temperature at the point at which it is read is identical to that at the pipe/fitting interface, which is not always the case. If the weld is performed without a barcode reading EF controller, the operator will need to estimate the temperature on site, read the temperature compensation tables correctly (if supplied and legible) and enter the new weld time into the controller. Such process relies on operator skill/judgment and as such, is open to human error.

Control Box


PF control boxes dynamically monitor the weld process when used with PLASSON ElectroFusion fittings.

- Dynamic monitoring - By continually monitoring the weld current, an electrofusion Control Unit will shut down if the current increases above the dynamic tolerance range, thereby avoiding the overheating and anti-oxidant depletion of PE materials which can adversely affect long-term weld integrity.
- Generator variability tolerance - PF control boxes are tolerant to generator variability as they accept a large voltage range and frequency variation.
- Numerous servicing centres for PF welding equipment are available.

What can go wrong?

Without dynamic monitoring of a PLASSON Automatic Welding electrofusion Control Unit, faults may occur unnoticed during the weld process causing the fitting to fail once in general use. Common causes of this can be seen in the diagram below.

Typical Electrofusion Welding Faults

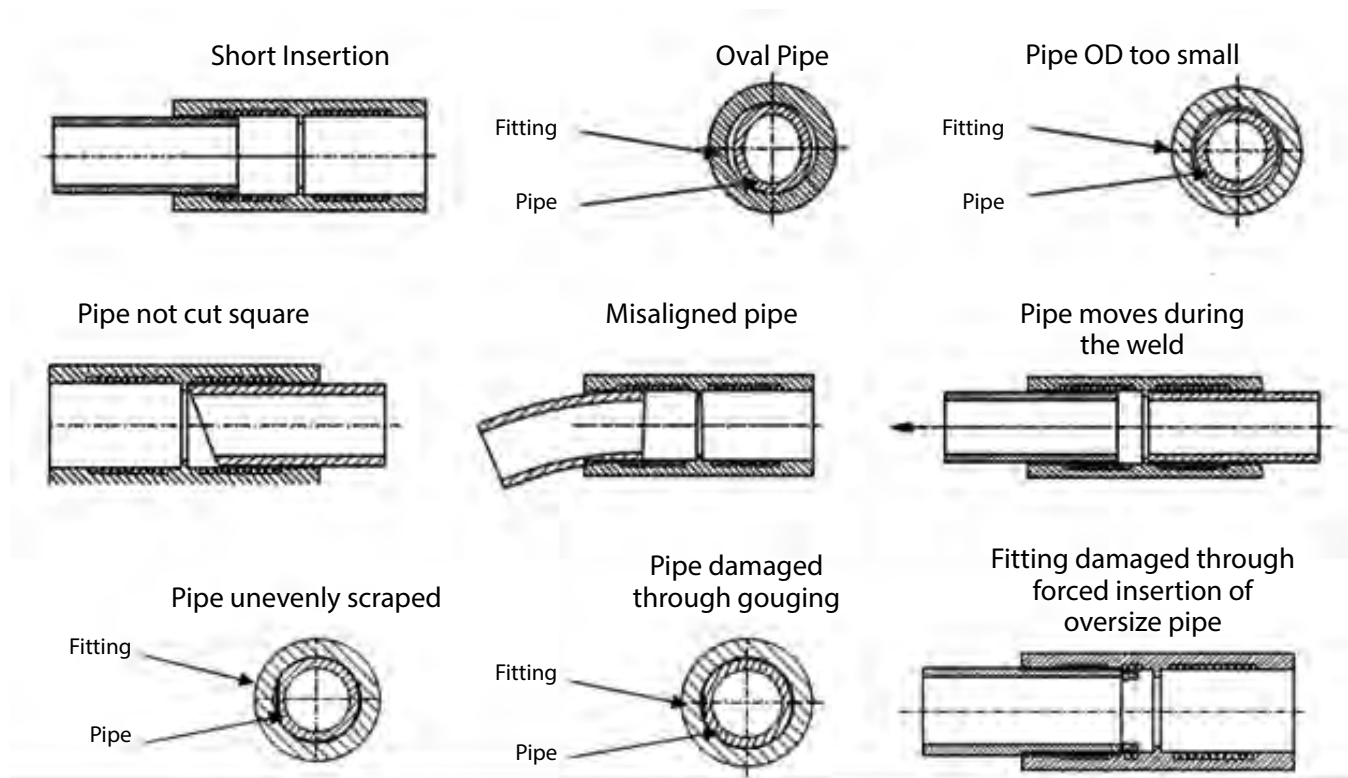

Please note:

PLASSON Automatic electrofusion Control Unit will not carry out this dynamic monitoring process on other manufacturers' fittings.



POLYCODE

PolyCode 180

New PolyCode 400

- ✓ Welds PLASSON fittings
- ✓ Light
- ✓ Compact
- ✓ Bluetooth enabled for smartphones using PLASSON SmartFuse App
- ✓ Use App to automatically determine and record welding parameters
- ✓ Tough weather-proof carry case



Control Boxes | Controladores Electrofusión

Control Box Comparison Table

Features	POLYCODE	SmartFuse	Polymatic Plus	PF PolyControl Plus V2.0
Fitting size	180mm/400mm	up to 355mm	up to 800mm (sizes above 355mm require cooling between welds)	Any size, continuous welding, no cooling
Welds	Any EF fittings	PLASSON only (competitor allowance with App)	Any EF fittings	Any EF fittings
Weld Tip Size	4.0mm Universal	4.0mm Universal	4.0mm Universal	4.0mm Universal
Bluetooth	Y	Y	Y	Y
PLASSON SmartFuse Mode (Automatic)	Y	Y	Y	Y
Manual Input of Welding Time	N	N	Y	Y
Welding Voltage	8-48 V	39.5 V	8-48 V	8-48 V
Output Current (Maximum)	75 A (54 A)	60 A (80 A)	80 A (110 A)	90 A (105 A)
Data recording	Y	Y with app	Y	Y
Multilingual Display Messages	Y	Y	Y	Y
Error messages in plain text	Y	Y	Y	Y
Adjustable display contrast	Y	Y	Y	Y
Dynamic process supervision	Y	Y	Y	Y
Auto software check	Y	Y	Y	Y
Resistance check	Y	Y	Y	Y
Ramped start	Y	Y	Y	Y
Service Message	After 200 Hours or 12 Months	After 200 Hours or 12 Months	After 200 Hours or 12 Months	After 200 Hours or 12 Months
Barcode reading capability	Y with app	Y with app	Y	Y
Fitting and Operator traceability	Y with app	Y with app	Y	Y
Earth Pin	10 A	15 A	15 A	15 A
Active Cooling	N	N	N	Y

The electrofusion control units made by PF Schweißtechnologie GmbH provide the following features to increase the generator suitability:

- High tolerance for the input voltage
 - 190 V to 300 V at 230 V nominal
 - 90 V to 150 V at 110 V nominal
- Display of current input voltage and frequency.
- Soft-Start for limitation of the generator load.

Despite these characteristics, the used generators must meet the following requirements and recommendations, in order to avoid damage to the electrofusion control unit.

This ensures that the internal monitoring functions of the control unit do not interrupt the welding process:

- Suitable for phase-angle control
- 230 V
 - No-load voltage adjustable between 240 V and 260 V
 - Output current of 18 A on one phase
 - For PolyControl: Better 21 A on one phase
- 110 V
 - No-load voltage adjustable between 120 V and 130 V
 - Output current of 36 A on one phase
- Stable output voltage and engine RPM even with rapidly changing load
- Synchronous generators with mechanical RPM control preferred
- Voltage peaks must not exceed 800 V



Extension lines

When using extension cables, it is essential that you also observe the information on the required conductor cross-sections and the maximum length. If you use cable drums, you must unwind them completely.

Control Boxes Cont. | Características

SmartFuse



Attention!

For welding of couplers in with a welding time of 900 s a stable and continuous supply voltage of 230 V is mandatory. When using a generator, it must be set to a no load voltage of between 240 V and 260 V.

The Electrofusion control units of type Monomatic, SmartFuse can only be used together with SmartFuse-capable fittings and couplers.

Only couplers that have a welding time of 900 s or below can be welded.

Welding time of the fittings	Recommended generator output power
20 to 600 s	3.2 kW
750 to 900 s	4.5 kW (mechanically controlled) 5.0 kW (electronically controlled)
> 900 s	Not possible to weld
Extension cord	Conductor cross-section
Up to 30 m	3 × 1.5 mm ²
Up to 50 m	3 × 2.5 mm ² (for the entire length)



Polymatic Plus

Variants: All

Usage for dimensions from **20 to 630 mm** without limitation.

When working with dimensions from 630 mm on, longer cool-down times must be provided for because otherwise the device might show the "Device too hot" error message. In this case, it is necessary to let the electrofusion control unit cool down before putting it to use again.

Dimension range of fittings	Recommended generator output power
20 to 160 mm	3.2 kW
180 to 500 mm	4.5 kW (mechanically controlled) 5.0 kW (electronically controlled)
> 500 mm	6.5 kW (mechanically controlled) 7.5 kW (electronically controlled)
Extension cord	Conductor cross-section
Up to 30 m	3 × 1.5 mm ²
Up to 50 m	3 × 2.5 mm ² (for the entire length)



Control Boxes Cont. | Características

PolyControl Plus V2.0 BT

Variants: All

Suitable without restriction for all coupler dimensions resp. PKS-systems that have a maximum continuous current consumption of **up to 85 A**.

Dimension range of fittings	Recommended generator output power
20 to 160 mm	3.2 kW
180 to 500 mm	4.5 kW (mechanically controlled) 5.0 kW (electronically controlled)
> 500 mm	6.5 kW (mechanically controlled) 7.5 kW (electronically controlled)
Extension cord	Conductor cross-section
Up to 30 m	3 × 2.5 mm ²
Up to 50 m	3 × 4.0 mm ² (for the entire length)



PolyCode 180 mm / 400 mm

Variants: All



Attention!

For welding of couplers in 180 mm a stable and continuous supply voltage of 230 V is mandatory. When using a generator, it must be set to a no load voltage of between 240 V and 260 V.

PolyCode 180 mm

Dimension of coupler	Requirements
16-140° mm	Usable without additional restrictions.
160-180° mm	Longer cool-down times must be provided because otherwise, the device might show the "Device too hot" error message. In this case, it is necessary to let the electrofusion control unit cool down before putting it to use again.
180° mm (SmartFuse)	Only couplers that have welding time of 400sec or below.
Saddle (Barcode)	Saddle with a heating coil resistance of >1Ω and a welding time below 1300sec.
180° mm (Barcode)	Only couplers that have a resistance of >0.6Ω
>180° mm	Couplers >180°mm cannot be welded.

PolyCode 400 mm

Dimension of coupler	Requirements
16-400° mm	Usable without additional restrictions.
>400° mm	When working with dimensions from 400°mm and up, longer cool-down times must be provided because otherwise, the device might show the "Device too hot" error message. In this case, it is necessary to let the electrofusion control unit cool down before putting it to use again.

Control Boxes Cont. | Características

Before processing fittings in this dimension range, you have to check that the welding current demand of the fitting does not continuously exceed the output current of the device and that the maximum output current is not exceeded.

Dimension range of fittings	Recommended generator output power
20 to 75 mm	2 kW
90 mm and above	4 kW
Extension cord	Conductor cross-section
Up to 50 m	3 × 1.5 mm ²



Control Boxes & Accessories | Accesorios para controladores Electrofundición

PolyCode	3m Fixed lead
SmartFuse	5m Lead
Polymatic Plus	5m Lead
PolyControl Plus V2	5m Lead



Welding Cables for SmartFuse or Digimatic Universal	Code
5m Detachable Lead with universal terminals	29142.0610.032
10m Detachable Lead with universal terminals	29142.0611.005



Welding Cables for Polymatic Plus USB with Universal (Reading Pen Sold Separately)	Code
5m Detachable Lead with 4.0 mm terminals	29142.0610.014
10m Detachable Lead with 4.0 mm terminals	29142.0611.016/1

Adaptors - 29142.0200.006



Reading Pens	Code
Reading Pen 2DL	29142.0100.001
Barcode Scanner Touch ID	29142.0120.004
Barcode Scanner Touch ID for PolyCode	29142.0120.003

Transport Case	Code
Transport Case (Monomatic/ Digimatic/ Polymatic Plus)	29141.2800.005

Ruling and Marking	Code
Magnetic Circular Pipe Ruler	29144.4402.001
Pi-Meter 20-700mm with Vernier 0.1mm	29145.5003.001
Pi-Meter 20-1200mm with Vernier 0.1mm	29145.5003.000

Marking Pens	Code
Marking pens broad white	29145.3100.019



Pipe Cutting | Cortadores de tuberías

Secateur Pipe Cutter	Code
Pipe Cutter up to 63mm (Single Hand)	29145.3000.007
Pipe Cutter Spare Blade for 63mm (Single Hand)	29145.3000.008
Pipe Cutter up to 63mm (Two Hand Use)	29145.3000.001

Rotational Pipe Cutter (S-Type)	Code
Rotational Pipe Cutter - 20 - 75mm	29145.3001.004
Rotational Pipe Cutter Spare Blade 20-75mm	29145.3001.005
Rotational Pipe Cutter 50 - 140mm	29145.3001.001
Rotational Pipe Cutter 90 - 160mm	29145.3001.002
Spare Blade 140 / 160mm	29145.3001.003

Rotational Pipe Cutter	Code
Rotational Pipe Cutter 32-125mm	29144.4400.006
Rotational Pipe Cutter 90-315mm	29144.4400.005
Rotational Pipe Cutter 63-225mm	29144.4400.004

Rotary Circular Saws 230 V	Code
250-500mm (Max. Cutting Depth 65mm)	29144.4401.002
500-1200mm (Max. Cutting Depth 85mm)	29144.4401.001
180-400 mm (Max. Cutting Depth 38mm)	29144.4401.005



Pipe Peeling | Rascadores de tuberías

Hand Scraper	Code
Hand Scraper - Small 1 1/2"	29145.3002.001
Blades for Small Hand Scraper (2)	29145.3002.002
Hand Scraper - Large 2 1/2"	29145.3002.003
Blades for Large Hand Scraper (2)	29145.3002.004



Rotational Peeling Tool Peeling for Saddle and Coupler Installation	Code
Rotational Peeling Tool 16-40mm	29144.4200.000/1
Rotational Peeling Tool 20-63mm	29144.4200.001
Rotational Peeling Tool 20-125mm	29144.4200.031
Rotational Peeling Tool 90-315mm	29144.4200.033
Rotational Peeling Tool 63-225mm	29144.4200.032



U-Peeler Peeling for Saddle and Coupler Installation	Code
U-Peeler 63mm	29144.4800.063
U-Peeler 75mm	29144.4800.075
U-Peeler 90mm	29144.4800.090
U-Peeler 110mm	29144.4800.110
U-Peeler 125mm	29144.4800.125
U-Peeler 140mm	29144.4800.140
U-Peeler 160mm	29144.4800.160
U-Peeler 180mm	29144.4800.180
U-Peeler 200mm	29144.4800.200
U-Peeler 225mm	29144.4800.225
U-Peeler 250mm	29144.4800.250
U-Peeler 280mm	29144.4800.280
U-Peeler 315mm	29144.4800.315



Pipe End Scraper Tool	Code
Pipe End Scraper Tool 63-200mm	29144.4200.015
Pipe End Scraper Tool 90-315mm	29144.4200.027
Pipe End Scraper Tool 180-400mm	29144.4200.016
Pipe End Scraper tool 90-315mm (PE-X) with rails	29144.4200.027/1
Pipe End Scraper tool 180-400mm (PE-X) with rails	29144.4200.016/1



Manual Saddle Peeler	Code
Manual Saddle Peeler	29144.4200.060



Pipe End Peeler	Code
Pipe End Peeler 450-1000mm	29144.4200.300
Pipe End Peeler 450-1000mm 230 V	29144.4200.301
Pipe End Peeler 450-1000mm 110 V	29144.4200.302



Mechanical Rotational End Peeler Tool Battery Powered	Code
PLASSON Scraper Tool For Pipe Ends 20-75mm Incl. Cordless Drill BOSCH in Plastic Suitcase	29144.4200S101



Chain Peelers Peeling for Saddle and Coupler Installation	Code
Chain Peeler 110-400mm	29144.4200.013
Chain Peeler 250-450mm	29144.4200.007
Chain Peeler 250-800mm	29144.4200.009
Extension 900-1000mm for Rotational	29144.4200.010
Chain Peeler 400-800mm 230 V	29144.4200.036
Extension 900-1000mm for Electrical Chain Peeler	29144.4200.038
Chain Peeler 800-1200mm 230 V	29144.4200.037
Extension 1400-1600mm for Electrical Chain Peeler	29144.4200.039

Powered Scrapers	Code
Electrical Saddle Scraper (110 V)	29144.4200.025
Electrical Saddle Scraper (230 V)	29144.4200.024
Electrical Saddle Scraper Cordless (230 V)	29144.4200.026



Battery Powered Chain Peeler

- ✓ Reduce pipe peeling time by almost 75%
- ✓ A new battery powered solution for the fast, more efficient and reliable preparation of large bore PE pipe for electrofusion welding.
- ✓ For use on 400-800mm pipe, with an optional extension kit to 1000mm, the PLASSON replaces hand powered tools to remove the oxidised and contaminated outer layer on PE pipe by peeling a consistent 0.2-0.3mm layer from the pipe surface.
A version for pipe 800-1200mm is also available. It can be extended to 1600 mm by the optional extension kit.
- ✓ The chain peeler is designed to work with challenges of ovality, flatness and varying pipe wall thickness, resulting in very large reductions in coupler handling times.
- ✓ Supplied with two quick charge batteries.



Rerounding Tools | Redondeadores | Two required - one rounding tool for each side of fitting.

Rerounding Shell 32-63mm	Code
32-40mm	29144.4602.006
50-63mm	29144.4602.007

Rounding Clamp 63-400mm	Code
63-180mm	29144.4602.005
110-250mm	29144.4602.003
180-315mm	29144.4602.004
250-400mm	29144.4602.009

Rounding Pliers	Code
32-40mm	29144.4602.016
50-63mm	29144.4602.015

Rounding Rings 63-250mm	Code
63mm	29145.3006.063
75mm	29145.3006.075
90mm	29145.3006.090
110mm	29145.3006.110
125mm	29145.3006.125
140mm	29145.3006.140
160mm	29145.3006.160
180mm	29145.3006.180
200mm	29145.3006.200
225mm	29145.3006.225
250mm	29145.3006.251

Hydraulic Rounding Shell 315-400mm	Code
Hydraulic Jack (315-400)	29145.3008.013
Rounding Shell 315mm (without jack)	29145.3008.001
Rounding Shell 355mm (without jack)	29145.3008.002
Rounding Shell 400mm (without jack)	29145.3008.003

Hydraulic Rounding Shell 450-630mm	Code
Hydraulic Jack (450-630)	29145.3008.014
Rounding Shell 450mm (without jack)	29145.3008.004
Rounding Shell 500mm (without jack)	29145.3008.005
Rounding Shell 560mm (without jack)	29145.3008.006
Rounding Shell 630mm (without jack)	29145.3008.007

Hydraulic Rounding Shell 710-900mm	Code
Hydraulic Jack (710-900)	29145.3008.015
Rounding Shell 710mm (without jack)	29145.3008.008
Rounding Shell 800mm (without jack)	29145.3008.009
Rounding Shell 900mm (without jack)	29145.3008.010

Hydraulic Strap Rounder	Code
450-710mm	29144.4602.017
Extension 800-1200mm	29144.4602.018
450-1200mm	29144.4602.019

* Hydraulic Tool. Use with PE pipes 450-800mm (Max. SDR 11)

EN259 Rounding Tool 450-1000mm	Code
450-1000mm	29144.4602.011



Rerounding Shell
315-900mm



Mechanical
Rerounding Tool
450-1000mm

Rerounding Tools Cont.

Rerounding Shell 63-225mm	Code
Used to round pipe after squeezing	
63mm	29145.3005.063 ■
75mm	29145.3005.075 ■
90mm	29145.3005.090 ■
110mm	29145.3005.110 ■
125mm	29145.3005.125
140mm	29145.3005.140
160mm	29145.3005.160
180mm	29145.3005.180
200mm	29145.3005.200
225mm	29145.3005.225



Squeeze Off Tools | Prensas / Obturadores

Manual Squeeze Off Tool For Gas Pipes	Code
16-32mm (wall 3mm) and 40mm SDR11	29144.4100.013 ■



Manual Squeeze Off Tool	Code
20-63mm Suits SDR11 16/20,25,32,40,50,63mm & SDR17 63mm Squeeze off is affected by turning the handle in a clockwise direction. Hydraulic operation. Metric limit plates set at 1.6t. Safety stops to prevent creep. Springs return jack to park position after squeeze off. Integral safety valve.	29144.4100.010 ■



Hydraulic Squeeze Off Tool	Code
63-90mm Sizes: 63,75,90mm. Hydraulic operation. Metric limit plates set at 1.6t. Safety stops to prevent creep. Springs return jack to park position after squeeze off. Integral safety valve.	29144.4100.006
63-180mm Suits 63-180mm SDR 11 & 17. Sizes: 63,75,90,110,125,160,180mm.	29144.4100.005 ■
63-200mm (Excl. 140mm) Suits 63-200mm SDR 11 & 17 (incl. 2 complete stopper sets). Sizes: 63,75,90,110,125,160,180 and 200mm. Hydraulic operation. Metric limit plates set at 1.6t. Safety stops to prevent creep.	29144.4100.011
75-200mm Suits 75-200mm SDR 11 & 17. Sizes: 75,90,110,125,160,180 and 200mm. Hydraulic operation. Metric limit plates set at 1.6t. Safety stops to prevent creep. Springs return jack to park position after squeeze off. Integral safety valve. Springs return jack to park position after squeeze off. Integral safety valve.	29144.4100.007 ■



Pipe Cleaning | Limpiadores de tubería

Cleaning Pads	Code
Tangit Detergent, 1 Liter	29145.2000.001
100 cleaning pads with tangit	29145.2000.002

PLASSON Pipewipes ensure surfaces are clean before electrofusion jointing (scraping of pipe surface is still required). 120 sheets per canister.



Pipe Clamping | Sujetadores

Alignment Clamps	Code
Pipe Clamp 16-63mm Adjustable to suit couplers, reducers, 22.5° 45° & 90° elbows and tees. Promotes restraint during the electrofusion process. Infinitely variable grip clamps to suit any combination of sizes, 16-63mm. Quick tightening operation, lightweight & easy to use.	29144.4300.000
Pipe Clamp 32-110mm Adjustable to suit couplers, reducers, 22.5° 45° & 90° elbows and tees. Promotes restraint during the electrofusion process. Infinitely variable grip clamps to suit any combination of sizes, 32-110mm. Quick tightening operation, lightweight & easy to use.	29144.4300.001
Pipe Clamp 63-225mm Adjustable to suit couplers, reducers, 22.5° 45° & 90° elbows and tees. Promotes restraint during the electrofusion process. Infinitely variable grip clamps to suit any combination of sizes, 110-225mm. Quick tightening operation, lightweight & easy to use.	29144.4300.009



Strap Clamps	Code
Used to prevent movement during the weld process. The PLASSON Strap Clamp, a convenient, flexible system for holding PE pipes steady during the electrofusion process. Does not assist with rerounding. For larger dimensions it is recommended to combine two or more Pipe Clamps (Strap Clamp).	
Strap Clamp 110-560mm 4 pipe clamps, 2 base bars, angled adaptor 22.5°, 45°, 90° & 180°	29144.4300.023
Ball Joint Single Ball Joint	29144.4301.001
Double Ball Joint	29144.4301.002
Strap Clamp 250-800mm With 2 fixed clamps, 2 clamps required	29144.4300.021
Strap Clamp 250-800mm Set Included in set: 2 complete clamps each with a pulling clamp, a fixed clamp and pulling shoes for couplers. Allows you to pull the coupler over the pipe and the opposite pipe into the coupler to complete the insertion.	29144.4300.026
Pipe Support Pipe support to 225mm	29144.4601.003



Specialized Installation Tooling For PLASSON Products | Sujetadores para la instalación de productos PLASSON

Waste Water Saddle Installation Tools	Code
Waste Water Clamping & Cutting Tool Set 110 110mm X 45Deg fixed outlet saddle clamp kit. Mains pipe sizes DN160-DN315 Includes: - Saddle clamp unit - Coupon removal tool. Drill not included.	29144.4703.001 ■
Tool for Waste Water Saddle 160 160mm Flexible Outlet Saddle Clamp Kit. Main pipe sizes DN225-DN560 Includes: - Saddle clamp unit - Core drill kit	29144.4700.001 ■



Tension belt for Flex Restraint	Code
Flex Restraint installation clamp (160-1200)	29144.4704.002



Clamping Tool For Sensor Adaptor	Code
Clamping Tool For Sensor Adaptor DN110-DN1200	29144.4706K000
Clamping Tool For Sensor Adaptor DN110-DN1200 without strap	29144.4706K001



Large Bore Saddles Installation Tools | Sujetadores para la instalación de tomas simples/bridadas de gran diámetro / Ramales PLASSON

To install a PLASSON Large Bore Saddle the following are required:

1. A Clamp Kit to suit the outlet size of the saddle.
2. A Strap Kit for outlet sizes DN200 - DN400.

3. A Core Cutter to core the saddle after welding.
4. A Drill/Motor to operate the Core Cutter.

Clamp Kits	Code
Saddle outlets DN90 - DN160 Includes: - Splittable Plates: DN90, 110, 125 & 160 - Pressure Test Spigot Removal Tool - Straps - Rounding Ring - Transport Case	29144.4701.003 ■
Saddle outlet DN200/DN180 - Includes: - Splittable Plate: DN200/DN180 - Rounding Ring - Transport Case - Strap kit required	29144.4701.201 ■
Saddle outlet DN225/DN250 - Includes: - Splittable Plate: DN250 - Rounding Ring - Transport Case - Strap kit required - Rerounding adaptor required for DN225 2012043	29144.4701.251 ■
Saddle outlet DN 315/DN 280 - Includes: - Splittable Plate: DN 315/DN 280 - Transport Case - Strap kit required - Pressing plate	29144.4701.315
Saddle outlet DN 400/DN355 - Includes: - Splittable Plate: DN 400/DN355 - Transport Case - Strap kit required - pressing plate	29144.4701.400



Strap Kit	Code
Suitcase with straps and ratchets for PLASSON saddle clamp for xl, xxl plates outlets 180-400, pipes 315-1200: - 3x Straps - 3x Ratchets - Torque wrench - Pressure Test Spigot Removal Tool - Transport Case	29144.4701.009



Rounding Adaptor	Code
DN250 to DN225 Rerounding Adaptor - Use with clamp kit	29141.4701.058

Support Bar	Code
Support Bar for Large Bore Repair Saddle DN250 – DN900 Use in conjunction with DN160 Saddle Outlet Kit	29142.4701.071

Saddle Pressing Tool	Code
Pressing Tool 225mm/SDR17 for lightFit Saddle	29142.4701.066

Saddle Clamping Tool	Code
Clamping Plate 225mm/SDR17 Splittable, for LightFit Saddle	29142.4701.226



Large Bore Saddles Installation Tools Cont.

Core Cutters	Code
Saddle outlet DN90 - DN160 - Includes: 1x 2" 1x DN90 core cutter 1x DN110 core cutter 1x DN125 core cutter 1x DN160 core cutter 1x Centre Drill 1x Drill chuck connector 1x Connector for SDS-Plus 1x Transport Case	29144.4702.003
Saddle outlet DN180, SDR11 DN180 Core Cutter, Borehole 143mm Includes Drill Adaptor and Case	29144.4702.143
Saddle outlet DN200, SDR11 DN200 Core Cutter, Borehole 159mm Includes Drill Adaptor and Case	29144.4702.159
Saddle outlet DN225, SDR11 DN225 Core Cutter, Borehole 179mm Includes Drill Adaptor and Case	29144.4702.179
Saddle outlet DN250, SDR11 DN250 Core Cutter, Borehole 199mm Includes Drill Adaptor and Case	29144.4702.199
Saddle outlet DN315, SDR11 DN315 Core Cutter, Borehole 251mm Includes Drill Adaptor and Case	29144.4702.251
Saddle outlet DN355, SDR11 DN355 Core Cutter, Borehole 283mm Includes Drill Adaptor and Case	29144.4702.283
Saddle outlet DN400, SDR11 DN400 Core Cutter, Borehole 319mm Includes Drill Adaptor and Case	29144.4702.319



Pressure Test Pump	Code
Pressure test pump with adapter for PLASSON large bore saddles	29144.4701.005



Tools for Drilling | Herramientas para perforación de tomas simples/bridadas de gran diámetro/Ramales PLASSON

Saddles with outlets DN90 – DN225 use a hand operated drill.

Saddles with a DN250 outlet can use either a hand operated drill or a motor mounting clamp and motor.

Saddles with outlets DN315 – DN400 use a motor mounting clamp and motor.

The same motor can be used on all outlets.

Drills - Motor	Code
DN90 - DN250 Outlets. BE75-X3 Quick	29144.4702.999

Saddle Drilling Equipment	Code
---------------------------	------

A complete tool consists of: Basic kit, clamping ring and core cutter.
So, the user must choose the components he needs when he orders.

Basic Kit	29144.4702.911
Clamping Ring DN250	29142.4702.030
Clamping Ring DN280	29142.4702.035
Clamping Ring DN315	29142.4702.029
Clamping Ring DN355	29142.4702.034
Clamping Ring DN400	29142.4702.028
Core cutter DN250 SDR11	29141.4704P199
Core cutter DN280 SDR11	29141.4704P233
Core cutter DN315 SDR11	29141.4704P251
Core cutter DN355 SDR11	29141.4704P283
Core cutter DN400 SDR11	29141.4704P319



Hot Tapping Tool | Herramientas para tomas en carga de grandes diámetros


Hot Tapping	Code
Core cutter 250mm	29141.4704P199
Core cutter 280mm	29141.4704P233
Core cutter 315mm	29141.4704P251
Core cutter 355mm	29141.4704P283
Core cutter 400mm	29141.4704P319
Hot Tapping Tool ISO Flange DN150 with 230 V Motor	29144.4705.001
Hot Tapping Tool ISO Flange DN150 with 110 V Motor	29144.4705.002
Hot Tapping Tool ISO Flange DN150 with 230 V Hydraulic Motor excluding hydraulic pump	29144.4705.H001
Hydraulic Pump with Gasoline Engine	29142.4705.300

The tools consists of Motor, Pressure compartment, an Adapter (if necessary) and a core cutter. All components must be ordered separately:

PN16 Compartment DN150	29142.4705.001
PN16 Compartment DN200	29142.4705.006
PN16 Compartment DN250	29142.4705.002
PN16 Compartment DN300	29142.4705.007
PN16 Compartment DN400	29142.4705.004
Adapter DN150 -> DN100	29142.4705.100
Adapter DN150 -> DN80	29142.4705.101



Hot Tapping Tool for Large Bore Saddles

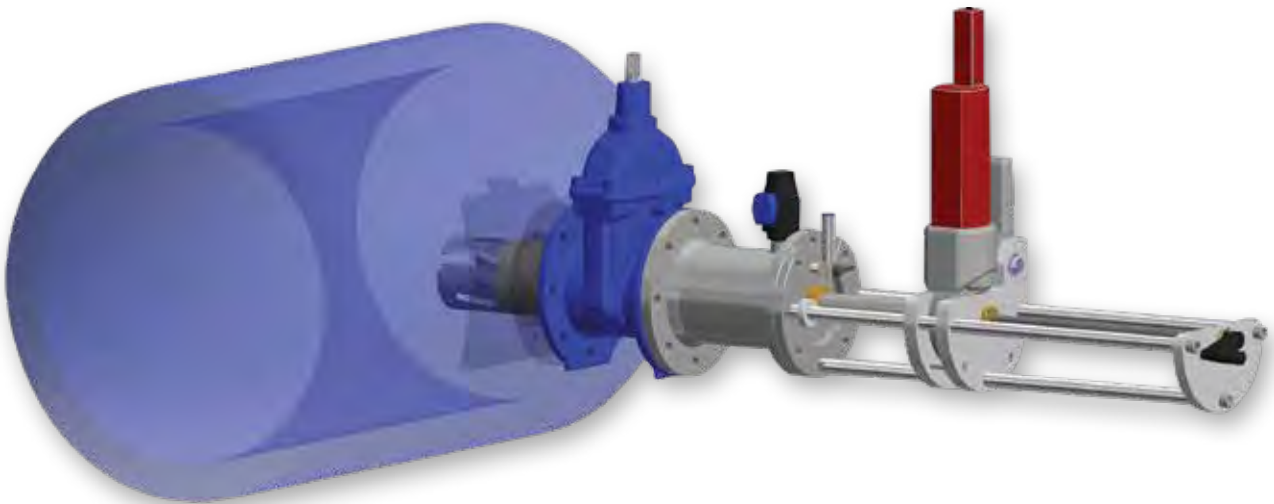

Contact PLASSON for more information



Take good care of your PLASSON control box



It is recommended that control boxes are serviced every 12 months or 200 hours of operation

Frequent servicing of your control box reduces the risk of operational problems interrupting the work flow and costing you money.

A standard service includes:

- Recalibration
- Installation of latest software
- Inspection and testing of all components
- Calibration Certificate

E-mail: sales@PLASSON.com www.flowsolutions.PLASSON.com



The background of the entire page is a close-up, artistic photograph of various white plastic fittings and pipe components. The image shows different types of connectors, elbows, and pipe sections with various thread patterns and internal structures. The lighting is soft, creating a clean, industrial aesthetic. The text is overlaid on a white rectangular area in the upper right corner.

PLASCON

SERIES 1 FITTINGS

PLASSON Series 1

PLASSON Series 1 - The range of innovative fittings created by PLASSON, market leader in design and manufacture of reliable fittings for polyethylene pipe systems.

PLASSON Series 1 - Fittings provide dedicated solutions for connecting PE pipe to various other pipe materials, such as Copper, Polybutylene, PVC and PEX.

PLASSON Series 1 - Push fittings are designed to withstand 16 bar pressure rating. Inserting the pipe up to the fitting stop creates both the seal and the grip on the pipe.

PLASSON Series 1 - Compact and attractive design makes this fitting ideal for the plumbing market, where space is limited and appearance is crucial. Simplicity of assembly makes both the professional and occasional user's job easier while retaining the PLASSON reliability.

The combination of PLASSON's current fitting range and the new Series 1 fulfill the requirements of all markets for PE pipe connections and connections to other pipe materials.

PLASSON Series 1 features and benefits include:

- Aesthetically designed product - gives a professional finish to the job
- Assembly tools not required - simple push fit assembly
- Compact size - can be assembled in confined spaces
- Instant seal and integrity of joint - captive seal and no nuts to tighten
- Full end load performance - no need to restrain joints
- Transition from PE to internal plumbing systems - Copper, PB, PVC and PEX accommodated in one fitting
- 50 year design life - provides total reliability
- Tamper resistant design - ensures system integrity
- Reduced stock shelf space

Technical Specifications

Materials

Compression Fittings

Body: Polypropylene, high grade copolymer

Nut: High Grade Polypropylene

Split Ring and Grip Ring: Acetal (POM)

Liner: Acetal (POM)

Seal: Nitrile rubber (NBR)

Reinforcing Ring: Stainless steel on all female offtakes from 1 1/4" up to 2"

Threaded Fittings

Body: Polypropylene, high grade copolymer

Reinforcing Ring: Stainless steel

Brass Threads: CW617

Operating Temperatures

The fittings are not to be used with hot water, although they withstand the same temperature as the polyethylene pipe itself.

The fittings will withstand sub-zero temperatures.

Chemical Resistance

PLASSON fittings are supplied, as standard, with polyacetal split and grip rings and NBR seals which are suitable for water.

Operating Pressures and Quality Certificates

PLASSON fittings sizes 20-63 are tested and approved for water according to ISO 17885 (replaced 14236) to PN16.

Threads

Threads marked "R", "Rp" and "Rc" are according to ISO 7-1.

Threads marked "G" are according to ISO 228.

Legend

UB	Units per bag
UC	Units per carton
W	Weight in grams

The units per bag in this catalogue are the default figures, other figures might be applicable to certain markets.

Note

Before installation, ensure that the end of the pipe to be inserted into the fitting is free of scratches and other imperfections and that both the pipe and the fitting itself are free of sand, mud, stones, etc. If fittings are reused, ensure that split ring and grip ring teeth are sharp and bite into the pipe, to avoid pullouts. If uncertain, replace the split ring and grip ring.

Pull out resistance of PVC Adaptors and Universal Adaptors has been approved by pressure testing UPVC/PP pipe assemblies at 25 bar operating pressure for at least 1 hour.

Note: We strongly recommend the use of PTFE tape in threaded connections.

For diameters 40mm and above, chamfering and lubrication of the pipe end will ease insertion (use silicone lubricant).

PLASSON Series 1

100100

Page 204 | Coupler



176100

Page 204 | Universal Slip Repair Coupler



176100/1761Q0

Page 204 | Slip Repair Coupler



101100

Page 205 | Reducing Coupler



101200

Page 205 | End Plug



100200

Page 206 | Male Adaptor



100300

Page 206 | Female Adaptor



1003G0

Page 207 | Female Adaptor G Thread



1001C0

Page 207 | Copper Pipe Adaptor



1002C7

Page 207 | Copper Pipe Male Adaptor



1003C7

Page 208 | Female Copper Adaptor



10017U

Page 208 | Universal Adaptor



1001Q0

Page 209 | PE to PVC Pipe Adaptor



1001QQ

Page 209 | Coupling for PVC Pipe



1001M6

Page 209 | Coupler Metric to Imperial (IPS)



10N200

Page 211 | PA Male Adaptor



10N2G0

Page 211 | PA Male G Adaptor



10N30

Page 212 | PA Female Adaptor



10N3G

Page 212

PA Female G Adaptor



107200

Page 213

Male Adaptor with
Threaded Brass Offtake



1072G0

Page 213

Male Adaptor with
Threaded Brass "G" Offtake



107300

Page 214

Female Adaptor with
Threaded Brass Offtake



1073G0

Page 214

Female Adaptor with
Threaded G* Brass Offtake



1073F0

Page 215

Female Brass Free
Nut Transition



100400

Page 215

90° Tee



103400

Page 216

90° Reducing Tee



101400

Page 216

90° Tee with Threaded
Female Offtake



100500

Page 217

90° Elbow



100600

Page 217

45° Elbow



107500

Page 218

Wall Plate Elbow



105100

Page 218

90° Reducing Elbow



1005M6

Page 219

90° Elbow Metric to Imperial
(IPS)



10N70

Page 219

90° Elbow with PA Male
Thread



10N7G

Page 220

90° Elbow with PA Male
Thread "G"



10N60

Page 220

90° Elbow with PA Female
Thread



10N6G

Page 221

90° Elbow with PA Female
Thread "G"



108500

Page 221 | 90° Elbow with Threaded Male Offtake



104500

Page 222 | 45° Elbow with Threaded Male Offtake



101500

Page 222 | 90° Elbow with Threaded Female Offtake



107700

Page 223 | 90° Elbow with Threaded Brass Male Offtake



107600

Page 223 | 90° Elbow with Threaded Brass Female Offtake



1076F0

Page 225 | 90° Elbow Female Brass Free Nut Transition



037100

Page 225 | PA Ball Valve Series 1 x Series 1



0371002

Page 226 | PA Ball Valve Series 1 x Male



0371003

Page 226 | PA Ball Valve Series 1 x Female



0371016

Page 226 | PA Ball Valve Series 1 x Free Nut



034100

Page 227 | Compression Stoptap



0341C0

Page 227 | Stoptap - Copper Pipe Adaptor



0358916

Page 228 | Free Nut Union for Water Meter



0358917

Page 228 | Free Nut Adaptor with Check Valve



109900

Page 228 | PLASSON Series 1 Wrench



189600

Page 229 | Chamfer Tool for PE Pipes



100040

Page 229 | Nut



100020

Page 229 | NBR O-Ring



10002D

Page 230

EPDM O-Ring



100029

Page 230

NBR Shaped Seal



10002D9

Page 230

EPDM Shaped Seal



100030

Page 231

Split Ring



100080

Page 231

Grip Ring



1091Q0

Page 231

PVC Pipe Adaptor Kit



Page 232

Installation Instructions



Page 232

Disassembly



Page 233

Assembly Instructions
PVC Pipe Kit



Page 234

PLASSON Universal
Slip Repair Coupler
Assembly Instruction



G-PLASS Fittings

150100

Page 236

Coupler



151100

Page 236

Reducing Coupler



150600

Page 236

45° Elbow



150500

Page 237

90° Elbow



150400

Page 237

90° Tee



153400

Page 237

90° Reducing Tee



150200

Page 238

Male Adaptor



157200

Page 238 Male Adaptor with
Threaded Brass Offtake



151200

Page 238 End Cap Body for Gas



159900

Page 240 G-PLASS Wrench




159600

Page 240 G-PLASS Integral
Chamfer Tool




Page 241-242 Gglass Installation
Instructions





UNIVERSAL SLIP REPAIR COUPLING

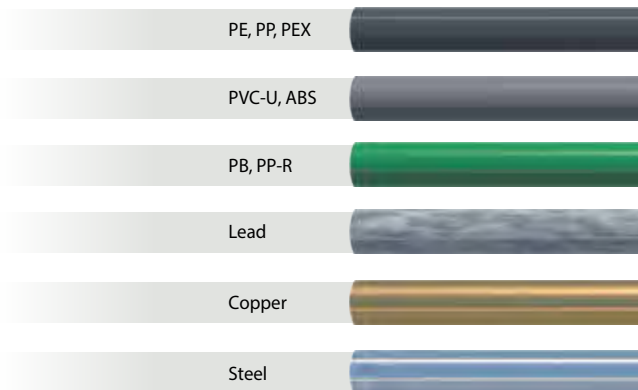

**SLIDE
N'SEAL**



PN16	PN16	PN16	PN16	PN16	PN16	PN16
14-18 _{mm}	19-22 _{mm}	24-28 _{mm}	31-35 _{mm}	40-43 _{mm}	48-51 _{mm}	60-64 _{mm}
0.55"-0.71"	0.74"-0.88"	0.94"-1.1"	1.22"-1.37"	1.57"-1.69"	1.89"-2.00"	2.36"-2.52"

TYPICAL PIPES:

25 _{mm}	32 _{mm}	40 _{mm}	50 _{mm}	63 _{mm}
3/4"	1"	1 1/4"	1 1/2"	2"

Pull-Out Resistant


- Suits a variety of plastic and metal pipe materials
- Each fitting designed to fit a wide range of diameters
- Zero force pipe insertion – can slide freely back and forth
- Thick o-ring seal – compensates for poor pipe quality
- Long sealing area – can bridge over damaged section or gap between pipes
- Total reliability - PN16, 50 year design life



For further information regarding dimensions, suitable pipes and assembly instructions please scan the code.

Coupler


100100



Product Code	Size d	E	H	I	UB	UC	W
100100020	20	41	92	45	1	320	64
100100025	25	47	98	48	1	250	80
100100032	32	58	108	53	1	150	126
100100040	40	70	142	70	1	90	256
100100050	50	85	158	78	1	55	369
100100063	63	103	183	90	1	30	620

Universal Slip Repair Coupler


176100

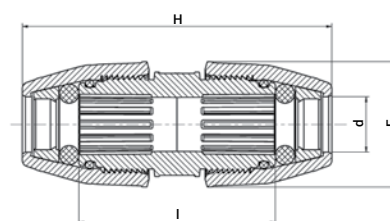

Product Code	Size d	E	H	I	UB	UC	W
176100014018	14-18	54	180	119	1	120	220
176100019022	19-22	58	180	119	1	90	250
176100024028	24-28	66	200	133	1	56	345
176100031035	31-35	76	210	143	1	40	467
176100040043	40-43	89	250	151	1	30	717
176100048051	48-51	101	270	158	1	20	968
176100060064	60-64	120	310	176	1	10	1517

Slip Repair Coupler

176100/1761Q0*

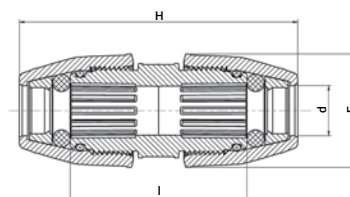


Product Code	Size d	E	H	I	UB	UC	W
1761Q0025	25	60	150	94	5	100	182
1761Q0032	32	68	160	96	5	80	238

* Split ring with metal teeth for wide range of plastic pipes

Reducing Coupler


101100

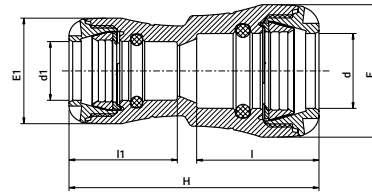

Product Code	Size d x d1	E	H	I	I1	E1	UB	UC	W
101100025020	25 x 20	47	100	48	45	41	1	250	75
101100032020	32 x 20	58	106	54	45	41	1	200	95
101100032025	32 x 25	58	110	54	48	47	1	200	109
101100040025	40 x 25	70	137	71	51	58	1	130	182
101100040032	40 x 32	70	139	71	55	58	1	100	196
101100050025	50 x 25	85	151	79	46	47	1	80	262
101100050032	50 x 32	85	151	79	55	58	1	75	285
101100050040	50 x 40	85	165	77	53	58	1	65	326
101100063032	63 x 32	103	170	91	55	58	1	45	446
101100063040	63 x 40	103	184	91	72	70	1	40	485
101100063050	63 x 50	103	187	91	81	85	1	35	542

End Plug


101200



Product Code	Size d	E	H	I	UB	UC	W
101200020	20	41	56	45	1	420	39
101200025	25	47	60	48	1	380	50
101200032	32	58	68	53	1	280	82
101200040	40	70	90	71	1	150	146
101200050	50	85	102	79	1	100	229
101200063	63	103	117	91	1	55	379

Male Adaptor


100200



Product Code	Size d x R	E	H	I	I2	UB	UC	W
100200020005	20 x 1/2"	41	70	45	16	1	400	41
100200020007	20 x 3/4"	41	71	45	17	1	380	41
100200025005	25 x 1/2"	47	75	48	16	1	380	52
100200025007	25 x 3/4"	47	76	48	17	1	350	52
100200025010	25 x 1"	47	78	48	19	1	320	55
100200032007	32 x 3/4"	58	82	55	17	1	250	83
100200032010	32 x 1"	58	84	55	19	1	250	86
100200032013	32 x 1 1/4"	58	86	55	21	1	250	90
100200032015	32 x 1 1/2"	58	86	55	21	1	250	94
100200032020	32 x 2"	58	97	55	25	1	180	138
100200040010	40 x 1"	70	104	73	19	1	140	145
100200040013	40 x 1 1/4"	70	106	73	21	1	135	149
100200040015	40 x 1 1/2"	70	106	73	21	1	130	152
100200040020	40 x 2"	70	110	73	25	1	130	161
100200050010	50 x 1"	85	125	78	19	1	90	238
100200050013	50 x 1 1/4"	85	122	78	21	1	90	234
100200050015	50 x 1 1/2"	85	114	81	21	1	90	226
100200050020	50 x 2"	85	118	81	25	1	85	232
100200063015	63 x 1 1/2"	103	125	92	19	1	50	377
100200063020	63 x 2"	103	129	92	25	1	50	367

Female Adaptor


100300



Product Code	Size d x Rp	E	H	I	I2	UB	UC	W
100300020005	20 x 1/2"	41	67	45	17	1	400	43
100300020007	20 x 3/4"	41	71	45	18	1	400	45
100300025005	25 x 1/2"	47	70	48	17	1	380	52
100300025007	25 x 3/4"	47	71	48	18	1	350	52
100300025010	25 x 1"	47	80	48	21	1	350	60
100300032007	32 x 3/4"	58	77	54	18	1	250	78
100300032010	32 x 1"	58	79	54	21	1	250	81
100300032013	32 x 1 1/4"	58	90	54	24	1	200	112
100300032015	32 x 1 1/2"	58	95	54	24	1	140	123
100300040010	40 x 1"	70	97	70	21	1	140	153
100300040013	40 x 1 1/4"	70	100	70	24	1	135	171
100300040015	40 x 1 1/2"	70	103	70	24	1	130	171
100300050013	50 x 1 1/4"	85	110	78	24	1	90	241
100300050015	50 x 1 1/2"	85	110	78	24	1	90	247
100300050020	50 x 2"	85	118	78	29	1	80	252
100300063015	63 x 1 1/2"	103	125	90	24	1	50	378
100300063020	63 x 2"	103	129	90	29	1	45	379

Female Adaptor G Thread


1003G0



Product Code	Size d x G	E	H	I	I2	UB	UC	W
1003G0025007	25 x 3/4"	47	71	48	12	1	280	53
1003G0025010	25 x 1"	47	80	48	14	1	260	63
1003G0032007	32 x 3/4"	58	76	54	12	1	200	79
1003G0032010	32 x 1"	58	79	54	14	1	200	83
1003G0032013	32 x 1 1/4"	58	90	64	19	1	200	105
1003G0032015	32 x 1 1/2"	64	95	67	19	1	180	105
1003G0040013	40 x 1 1/4"	70	100	74	19	1	135	135
1003G0040015	40 x 1 1/2"	70	103	70	19	1	130	173
1003G0050015	50 x 1 1/2"	85	110	78	19	1	90	252
1003G0050020	50 x 2"	85	118	89	23	1	80	260
1003G0063015	63 x 1 1/2"	103	125	90	19	1	50	260
1003G0063020	63 x 2"	103	129	95	23	1	50	383

Copper Pipe Adaptor


1001C0

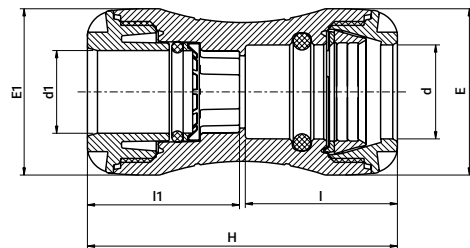

Product Code	Size d x d1	E	H	I	I1	E1	UB	UC	W
1001C0020015	20 x 15	41	92	45	45	41	1	320	68
1001C0025015	25 x 15	47	100	48	46	41	1	250	79
1001C0025022	25 x 22	47	98	48	48	47	1	220	81
1001C0032028	32 x 28	58	108	53	53	58	1	150	131
1001C0040028	40 x 28	70	139	71	55	58	1	100	203

Copper Pipe Male Adaptor


1002C7

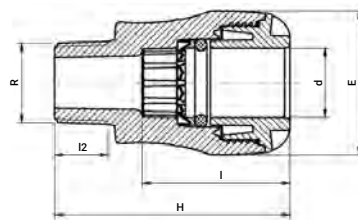

Product Code	Size d x R	E	H	I	I2	UB	UC	W
1002C7015007	15 x 3/4"	41	71	45	17	1	300	47
1002C7022007	22 x 3/4"	47	76	48	17	1	300	51
1002C7028010	28 x 1"	58	84	55	19	1	180	91

Female Copper Adaptor


1003C7

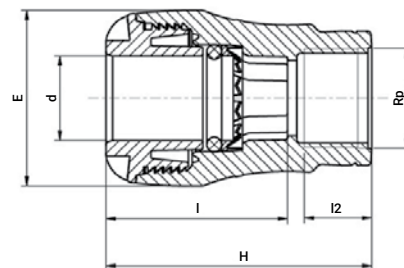

Product Code	Size d x Rp	E	H	I	I2	UB	UC	W
1003C7015007	15 x 3/4"	41	71	45	18	1	300	48
1003C7022007	22 x 3/4"	47	71	48	18	1	280	55

Universal Adaptor


10017U

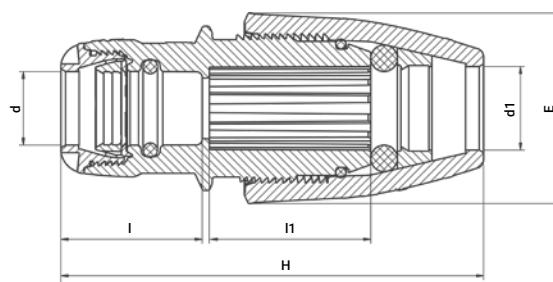

Product Code	Size d x d1	E	H	I	I1	UB	UC	W
10017U025018	25 x 14-18	54	117 - 137	48	47	5	180	130
10017U025022	25 x 19-22	57	119 - 130	48	47	5	150	141
10017U025028	25 x 24-28	66	130 - 142	48	55	5	120	180
10017U025035	25 x 31-35	76	150 - 158	48	62	5	70	243
100170032022	32 x 19-22	57	127 - 138	55	47		120	170
100170032028	32 x 24-28	66	135 - 147	55	55		100	210
100170032035	32 x 31-35	76	153 - 161	55	60		70	260

PE to PVC Pipe Adaptor

1001Q0

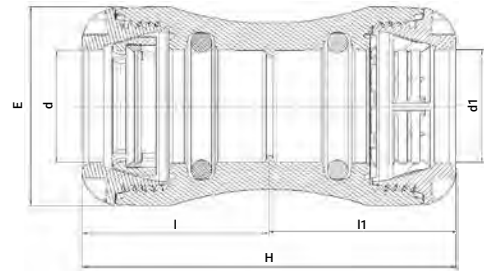


Product Code	Size d x d1*	E	H	I	I1	UB	UC	W
1001Q0025	25 x 25	47	98	48	48	1	200	85
1001Q0032	32 x 32	58	108	53	53	1	150	133
1001Q0040	40 x 40	70	142	70	70	1	100	249
1001Q0050	50 x 50	85	158	78	78	1	55	379
1001Q0063	63 x 63	103	183	90	90	1	30	649

* d1 - PVC connection

Coupling for PVC Pipe


1001QQ

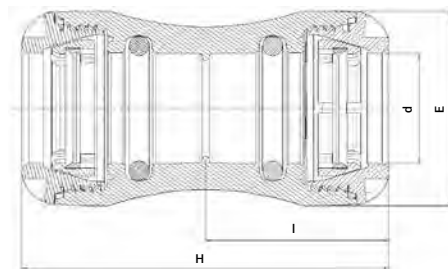

Product Code	Size d	E	H	I	UB	UC	W
1001QQ025	25	47	98	48	1	200	95
1001QQ032	32	58	108	53	1	130	144
1001QQ040	40	70	142	70	1	80	262
1001QQ050	50	85	158	78	1	55	386
1001QQ063	63	103	183	90	1	38	678

Coupler Metric to Imperial (IPS)

1001M6

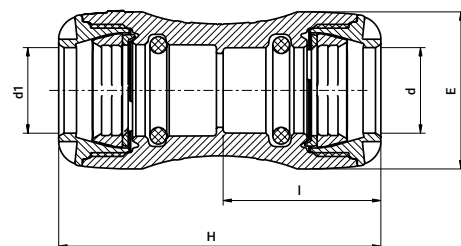

Product Code	Size d x d1	E	H	I	UB	UC	W
1001M6020005	20 x 1/2"	41	92	45	10	400	57
1001M6025005	25 x 1/2"	47	100	48	10	240	76
1001M6025007	25 x 3/4"	47	98	48	10	300	80
1001M6032010	32 x 1"	58	108	53	5	180	130


PLASSON PA Threads

- ✓ Corrosion free
- ✓ Ideal for handling high-pressure environments, stresses and heavy loads
- ✓ Smooth assembly and disassembly, reducing the risk of thread damage
- ✓ Suitable for outdoor applications
- ✓ Suitable for professionals and DIY enthusiasts alike



PA Male Adaptor


10N200

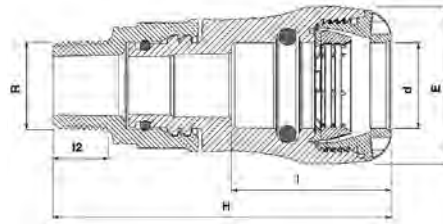

Product Code	Size d x R	H	E	I	I2	UB	UC	W
10N200020005	20 x 1/2"	95	41	45	16	1	320	70
10N200020007	20 x 3/4"	96	41	45	17	1	320	70
10N200020010	20 x 1"	77	41	45	19	1		
10N200025005	25 x 1/2"	101	47	48	16	1	300	80
10N200025007	25 x 3/4"	102	47	48	17	1	300	80
10N200025010	25 x 1"	104	47	48	19	1	300	90
10N200032007	32 x 3/4"	118	58	55	16	1	150	160
10N200032010	32 x 1"	120	58	55	19	1	145	170
10N200032013	32 x 1 1/4"	122	58	55	22	1	130	170
10N200032015	32 x 1 1/2"	122	58	55	22	1		
10N200032020	32 x 2"	133	58	55	26	1		
10N200040007	40 x 3/4"					1		
10N200040010	40 x 1"	140	70	73	19	1	110	220
10N200040013	40 x 1 1/4"	142	70	73	22	1	100	230
10N200040015	40 x 1 1/2"	142	70	73	22	1	100	200
10N200050013	50 x 1 1/4"	158	85	78	22	1	55	440
10N200050015	50 x 1 1/2"	158	85	78	22	1	55	440
10N200050020	50 x 2"	162	85	78	26	1	50	450
10N200063013	63 x 1 1/4"	171	103	89	22	1		
10N200063015	63 x 1 1/2"	171	103	89	22	1		
10N200063020	63 x 2"	175	103	92	26	1	40	590

PA Male G Adaptor


10N2G0

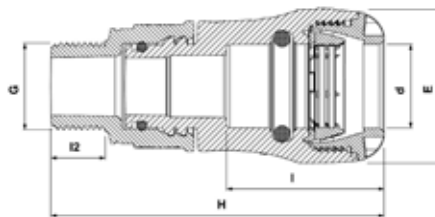

Product Code	Size d x G	H	E	I	I2	UB	UC	W
10N2G0020005	20 x 1/2"	95	41	45	16	1	350	70
10N2G0020007	20 x 3/4"	96	41	45	17	1		
10N2G0020010	20 x 1"	77	41	45	19	1		
10N2G0025005	25 x 1/2"	101	47	48	16	1		
10N2G0025007	25 x 3/4"	102	47	48	17	1	300	80
10N2G0025010	25 x 1"	104	47	48	19	1	250	80
10N2G0032007	32 x 3/4"	118	58	55	16	1		
10N2G0032010	32 x 1"	120	58	55	19	1	145	170
10N2G0032013	32 x 1 1/4"	122	58	55	22	1		
10N2G0032015	32 x 1 1/2"	122	58	55	22	1		
10N2G0040010	40 x 1"	140	70	73	19	1		
10N2G0040013	40 x 1 1/4"	142	70	73	22	1	110	230
10N2G0040015	40 x 1 1/2"	142	70	73	22	1		
10N2G0040020	40 x 2"	146	70	73	26	1		
10N2G0050013	50 x 1 1/4"	158	85	78	22	1		
10N2G0050015	50 x 1 1/2"	158	85	78	22	1	55	440
10N2G0050020	50 x 2"	162	85	78	26	1		
10N2G0063015	63 x 1 1/2"	171	103	89	22	1		
10N2G0063020	63 x 2"	175	103	92	26	1	40	580

PA Female Adaptor


10N300

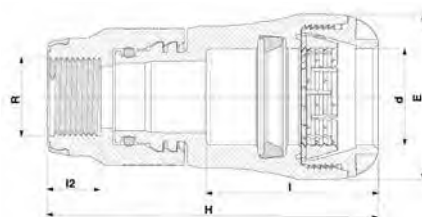

Product Code	Size d x R	H	E	I	I2	UB	UC	W
10N300020007	20 x 3/4"	100	41	45	18	1		
10N300020010	20 x 1"	101	41	45	21	1		
10N300025005	25 x 1/2"	105	47	48	17	1		
10N300025007	25 x 3/4"	106	47	48	18	1		
10N300025010	25 x 1"	108	47	48	21	1		
10N300032010	32 x 1"	122	58	55	21	1		
10N300032013	32 x 1.1/4"	125	58	55	24	1		
10N300040010	40 x 1"	142	70	73	21	1		
10N300040013	40 x 1.1/4"	145	70	73	24	1		
10N300050015	50 x 1.1/2"	159	85	78	24	1		
10N300050020	50 x 2"	164	85	78	29	1		
10N300063015	63 x 1.1/2"	172	103	89	24	1		
10N300063020	63 x 2"	177	103	92	29	1		

PA Female G Adaptor


10N3G0

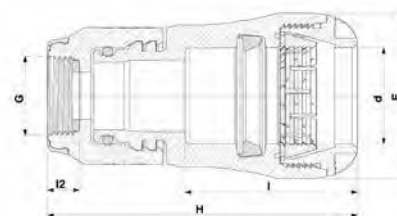

Product Code	Size d x G	H	E	I	I2	UB	UC	W
10N3G0020005	20 x 1/2"	92	41	45	12	1		
10N3G0020007	20 x 3/4"	92	41	45	12	1		
10N3G0020010	20 x 1"	92	41	45	14	1		
10N3G0025005	25 x 1/2"	98	47	48	12	1		
10N3G0025007	25 x 3/4"	98	47	48	12	1		
10N3G0025010	25 x 1"	99	47	48	14	1		
10N3G0032010	32 x 1"	113	58	55	14	1		
10N3G0032013	32 x 1.1/4"	118	58	55	19	1		
10N3G0032015	32 x 1.1/2"	118	58	55	19	1		
10N3G0040010	40 x 1"	133	70	73	14	1		
10N3G0040013	40 x 1.1/4"	138	70	73	19	1		
10N3G0040015	40 x 1.1/2"	138	70	73	19	1		
10N3G0050015	50 x 1.1/2"	152	85	78	19	1		
10N3G0050020	50 x 2"	157	85	78	23	1		
10N3G0063015	63 x 1.1/2"	165	103	89	19	1		
10N3G0063020	63 x 2"	170	103	92	23	1		

Male Adaptor with Threaded Brass Offtake


107200

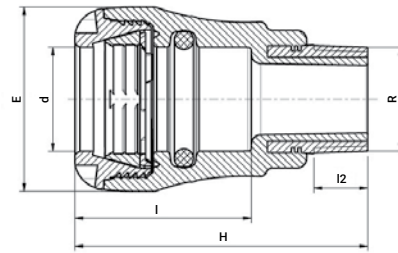

Product Code	Size d x R	E	H	I	I2	UB	UC	W
107200020005	20 x 1/2"	41	76	45	13	1	360	72
107200020007	20 x 3/4"	41	77	45	15	1	320	82
107200025005	25 x 1/2"	47	79	48	13	1	320	82
107200025007	25 x 3/4"	47	80	48	15	1	273	92
107200025010	25 x 1"	47	85	48	17	1	200	126
107200032007	32 x 3/4"	58	88	55	15	1	220	120
107200032010	32 x 1"	58	92	55	17	1	162	153
107200032013	32 x 1 1/4"	58	100	55	19	1	124	200
107200032015	32 x 1 1/2"	58	101	55	19	1	110	239
107200040010	40 x 1"	70	110	73	17	1	115	216
107200040013	40 x 1 1/4"	70	113	73	19	1	97	260
107200040015	40 x 1 1/2"	70	113	73	19	1	80	290
107200050010	50 x 1"	85	127	81	17	1	90	301
107200050013	50 x 1 1/4"	85	127	81	19	1	80	340
107200050015	50 x 1 1/2"	85	120	81	19	1	75	366
107200050020	50 x 2"	85	127	81	23	1	55	449
107200063015	63 x 1 1/2"	103	132	92	19	1	50	500
107200063020	63 x 2"	103	139	92	23	1	43	580

Male Adaptor with Threaded Brass "G" Offtake


1072G0

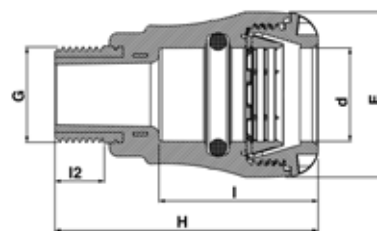

Product Code	Size d x G	H	E	I	I2	UB	UC	W
1072G0020005	20 x 1/2"	76	41	45	13	1	360	70
1072G0020007	20 x 3/4"	77	41	45	15	1	320	80
1072G0025005	25 x 1/2"	79	47	48	13	1	320	120
1072G0025007	25 x 3/4"	80	47	48	15	1	260	90
1072G0025010	25 x 1"	85	47	48	17	1	200	130
1072G0032010	32 x 1"	92	58	55	17	1	150	150
1072G0032013	32 x 1 1/4"	100	58	55	19	1	130	200
1072G0040013	40 x 1 1/4"	110	70	73	19	1	110	250
1072G0040015	40 x 1 1/2"	113	70	73	19	1	80	290
1072G0050015	50 x 1 1/2"	120	85	81	19	1	70	370
1072G0050020	50 x 2"	127	85	81	23	1	50	480
1072G0063020	63 x 2"	132	103	92	23	1	50	600

Female Adaptor with Threaded Brass Offtake


107300

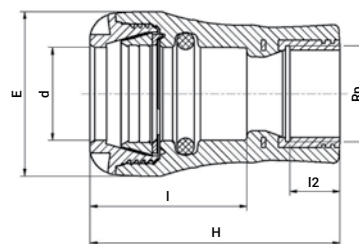

Product Code	Size d x Rp	E	H	I	I2	UB	UC	W
107300020005	20 x 1/2"	41	73	45	15	1	320	80
107300020007	20 x 3/4"	41	80	45	16	1	250	100
107300025005	25 x 1/2"	47	76	48	15	1	280	91
107300025007	25 x 3/4"	47	78	48	16	1	250	100
107300025010	25 x 1"	47	89	48	19	1	180	136
107300032007	32 x 3/4"	58	86	56	16	1	180	132
107300032010	32 x 1"	58	88	56	19	1	159	156
107300032013	32 x 1 1/4"	58	98	56	21	1	120	214
107300040007	40 x 3/4"	70	109	73	16	1	130	196
107300040010	40 x 1"	70	106	73	19	1	130	226
107300040013	40 x 1 1/4"	70	109	73	21	1	99	273
107300040015	40 x 1 1/2"	70	113	73	21	1	100	299
107300050010	50 x 1"	85	113	81	19	1	80	313
107300050013	50 x 1 1/4"	85	124	81	21	1	80	350
107300050015	50 x 1 1/2"	85	118	81	21	1	70	367
107300050020	50 x 2"	85	127	81	26	1	60	457
107300063015	63 x 1 1/2"	103	128	92	21	1	50	515
107300063020	63 x 2"	103	133	92	26	1	43	586

Female Adaptor with Threaded G Brass Offtake


1073G0

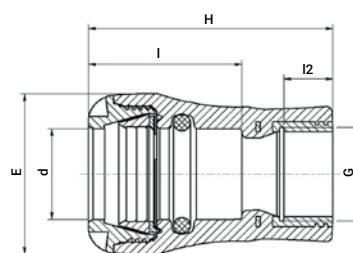

Product Code	Size d x G	H	E	I	I2	UB	UC	W
1073G0020005	20 x 1/2"	73	41	45	12	1	320	90
1073G0020007	20 x 3/4"	80	41	55	12	1	250	100
1073G0025005	25 x 1/2"	76	47	48	12	1	280	190
1073G0025007	25 x 3/4"	78	47	48	12	1	248	100
1073G0025010	25 x 1"	89	47	48	14	1	180	140
1073G0032007	32 x 3/4"	86	58	56	12	1	180	140
1073G0032010	32 x 1"	88	58	56	14	1	156	160
1073G0032013	32 x 1 1/4"	99	58	69	19	1	100	240
1073G0040013	40 x 1 1/4"	109	70	73	19	1	90	260
1073G0040015	40 x 1 1/2"	109	70	81	19	1	90	310
1073G0050015	50 x 1 1/2"	118	85	68	19	1	80	360
1073G0050020	50 x 2"	127	85	88	23	1	40	550
1073G0063020	63 x 2"	133	103	92	23	1	35	680

Female Brass Free Nut Transition


1073F0

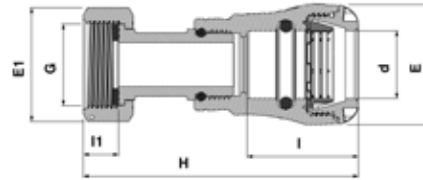

Product Code	Size d x G	H	E	E1	I	I1	UB	UC	W
1073F0020007	20 x ¾"	109	41	32	45	15	1	141	180
1073F0025007	25 x ¾"	113	47	32	48	15	1	134	190
1073F0025010	25 x 1"	116	47	40	48	17	1	88	280
1073F0032010	32 x 1"	121	58	40	54	17	1	80	310
1073F0032013	32 x 1¼"	133	58	49	70	17	1	55	450
1073F0040013	40 x 1¼"	151	64	49	70	17	1	45	520
1073F0040015	40 x 1½"	156	64	54	70	19	1	40	640
1073F0050015	50 x 1½"	165	85	54	78	19	1	35	720
1073F0050020	50 x 2"	176	85	68	78	21	1	20	1050
1073F0063020	63 x 2"	191	103	68	90	21	1	20	1200

90° Tee


100400

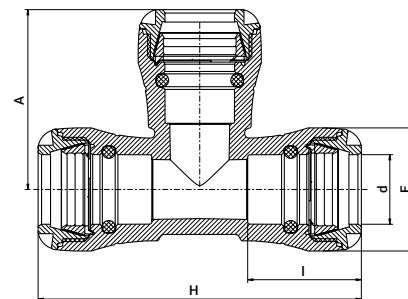

Product Code	Size d	E	H	I	A	UB	UC	W
100400020	20	41	123	45	71	1	180	103
100400025	25	47	134	48	78	1	130	137
100400032	32	58	152	54	84	1	80	221
100400040	40	70	192	70	108	1	45	429
100400050	50	85	214	78	124	1	30	667
100400063	63	103	262	90	147	1	14	1157

90° Reducing Tee


103400

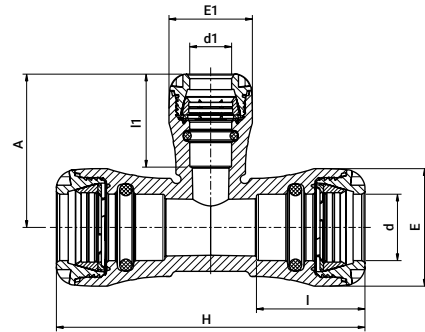

Product Code	Size d x d1 x d	E	H	I	I1	A	E1	UB	UC	W
103400025020	25 x 20 x 25	47	134	48	46	73	41	1	150	127
103400032020	32 x 20 x 32	58	152	54	46	75	41	1	100	185
103400032025	32 x 25 x 32	58	152	54	49	81	47	1	100	195
103400040025	40 x 25 x 40	70	192	70	49	86	47	1	55	325
103400040032	40 x 32 x 40	70	192	70	54	93	58	1	55	358
103400050025	50 x 25 x 50	85	214	78	49	90	47	1	35	500
103400050032	50 x 32 x 50	85	214	78	54	98	58	1	35	530
103400063025	63 x 25 x 63	103	262	90	49	96	47	1	24	848
103400063032	63 x 32 x 63	103	262	90	54	100	58	1	20	871

90° Tee with Threaded Female Offtake


101400

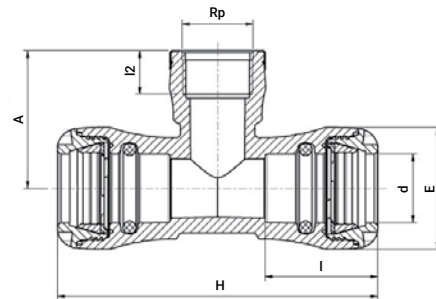

Product Code	Size d x Rp x d	E	H	I	I2	A	UB	UC	W
101400020005	20 x 1/2" x 20	41	123	45	17	43	1	250	84
101400020007	20 x 3/4" x 20	41	123	45	18	46	1	220	88
101400020010	20 x 1" x 20	41	123	45	21	52	1	220	99
101400025005	25 x 1/2" x 25	47	134	48	17	46	1	180	105
101400025007	25 x 3/4" x 25	47	134	48	18	46	1	180	107
101400025010	25 x 1" x 25	47	134	48	21	54	1	180	114
101400032007	32 x 3/4" x 32	58	152	54	18	52	1	100	172
101400032010	32 x 1" x 32	58	152	54	21	55	1	100	183
101400032013	32 x 1 1/4" x 32	58	152	54	24	63	1	80	215
101400040010	40 x 1" x 40	70	192	70	21	65	1	65	304
101400040013	40 x 1 1/4" x 40	70	192	70	24	73	1	45	333

90° Elbow


100500



Product Code	Size d	E	I	A	UB	UC	W
100500020	20	41	45	67	1	250	75
100500025	25	47	48	73	1	200	96
100500032	32	58	54	81	1	130	157
100500040	40	70	70	106	1	65	291
100500050	50	85	78	119	1	40	462
100500063	63	103	90	141	1	25	799

45° Elbow


100600




Product Code	Size d	E	I	A	UB	UC	W
100600032	32	58	54	67	1	150	142
100600040	40	70	71	88	1	80	263
100600050	50	85	79	100	1	40	428
100600063	63	103	90	118	1	25	719

Wall Plate Elbow

107500

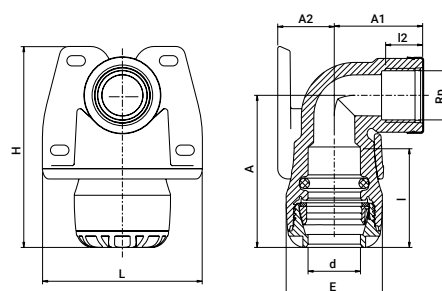


Product Code	Size d x Rp	E	H	I	I2	A	A1	A2	L	UB	UC	W
107500020005	20 x 1/2"	41	95	45	17	67	39	28	73	1	200	92
107500020007	20 x 3/4"	41	95	45	18	67	43	28	73	1	200	96
107500025005	25 x 1/2"	47	98	48	17	74	40	28	78	1	180	110
107500025007	25 x 3/4"	47	98	48	18	74	43	28	78	1	180	116

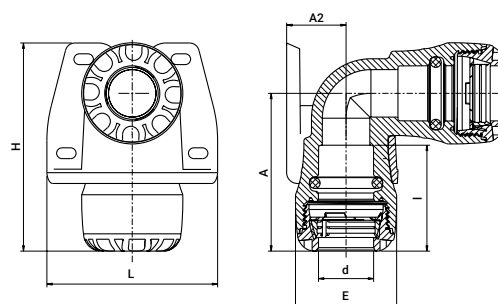

Product Code	Size d x d	E	H	I	A	A2	L	UB	UC	W
107500025	25 x 25	47	98	48	74	28	78	5	125	138

90° Reducing Elbow


105100



Product Code	Size d x d1	E	I	I1	A	A1	E1	UB	UC	W
105100025020	25 x 20	47	48	46	74	68	41	1	200	90

90° Elbow Metric to Imperial (IPS)


1005M6



Product Code	Size d x d1	E	I	I1	A	A1	E1	UB	UC	W
1005M6025005	25 x 1/2"	47	48	46	74	68	41	10	180	89
1005M6025007	25 x 3/4"	47	48	48	73	73	47	10	160	101

90° Elbow with PA Male Thread


10N70



Product Code	Size d x R	A	A1	E	I	I2	UB	UC	W
10N700025005	25 x 1/2"	67	67	41	45	16	1	250	90
10N700025007	25 x 3/4"	67	68	41	45	17	1	200	90
10N700025010	25 x 1"	73	69	47	48	16	1	200	100
10N700032007	32 x 3/4"	73	70	47	48	17	1		0
10N700032010	32 x 1"	73	72	47	48	19	1	130	190
10N700032013	32 x 1.1/4"	81	76	58	54	17	1	100	200
10N700032015	32 x 1.1/2"	81	78	58	54	19	1		0
10N700032020	32 x 2"	81	92	58	54	22	1		0
10N700040007	40 x 3/4"	81	92	58	54	22	1		0
10N700040010	40 x 1"	81	97	58	54	26	1	90	270
10N700040013	40 x 1.1/4"	106	91	70	70	19	1	65	270
10N700040015	40 x 1.1/2"	106	95	70	70	22	1	75	280
10N700063013	63 x 1.1/4"	106	95	70	70	22	1		0
10N700063015	63 x 1.1/2"	141	114	103	90	22	1	30	710
10N700063020	63 x 2"	141	119	103	90	26	1	30	710

90° Elbow with PA Male Thread "G"


10N70G



Product Code	Size d x G	A	A1	E	I	I2	UB	UC	W
10N7G0025005	25 x 1/2"	67	67	41	45	16	1		0
10N7G0025007	25 x 3/4"	67	68	41	45	17	1	180	80
10N7G0025010	25 x 1"	73	69	47	48	16	1		0
10N7G0032007	32 x 3/4"	73	70	47	48	17	1		0
10N7G0032010	32 x 1"	73	72	47	48	19	1	130	190
10N7G0032013	32 x 1.1/4"	81	76	58	54	17	1		0
10N7G0032015	32 x 1.1/2"	81	78	58	54	19	1		0
10N7G0040007	40 x 3/4"	81	92	58	54	22	1		0
10N7G0040010	40 x 1"	81	92	58	54	22	1		0
10N7G0040013	40 x 1.1/4"	106	95	70	70	22	1	85	270
10N7G0040015	40 x 1.1/2"	106	95	70	70	22	1		0
10N7G0063013	63 x 1.1/4"	141	114	103	90	22	1		0
10N7G0063015	63 x 1.1/2"	141	114	103	90	22	1		0
10N7G0063020	63 x 2"	141	119	103	90	26	1	30	710

90° Elbow with PA Female Thread


10N60



Product Code	Size d x R	A	A1	E	I	I2	UB	UC	W
10N600020005	20 x 1/2"	66	71	41	45	17	1		
10N600020007	20 x 3/4"	66	72	41	45	18	1		
10N600020010	20 x 1"	66	75	41	45	21	1		
10N600025005	25 x 1/2"	74	73	47	48	17	1		
10N600025007	25 x 3/4"	74	74	47	48	18	1		
10N600025010	25 x 1"	74	77	47	48	21	1		
10N600032010	32 x 1"	81	80	58	54	21	1		
10N600032013	32 x 1.1/4"	81	95	58	54	24	1		
10N600040010	40 x 1"	107	93	70	70	21	1		
10N600040013	40 x 1.1/4"	107	98	70	70	24	1		
10N600050015	50 x 1.1/2"	122	118	85	79	24	1		
10N600050020	50 x 2"	122	123	85	79	29	1		
10N600063015	63 x 1.1/2"	143	127	103	90	24	1		
10N600063020	63 x 2"	143	132	103	90	29	1		

90° Elbow with PA Female Thread "G"


10N60G



Product Code	Size d x G	A	A1	E	I	I2	UB	UC	W
10N6G0020007	20 x 3/4"	66	64	41	45	12	1		
10N6G0020010	20 x 1"	66	66	41	45	14	1		
10N6G0025005	25 x 1/2"	74	66	47	48	12	1		
10N6G0025007	25 x 3/4"	74	66	47	48	12	1		
10N6G0025010	25 x 1"	74	68	47	48	14	1		
10N6G0032010	32 x 1"	81	71	58	58	14	1		
10N6G0032013	32 x 1.1/4"	81	88	58	58	19	1		
10N6G0032015	32 x 1.1/2"	81	88	58	58	19	1		
10N6G0040010	40 x 1"	107	84	70	70	14	1		
10N6G0040013	40 x 1.1/4"	107	91	70	70	19	1		
10N6G0040015	40 x 1.1/2"	107	91	70	70	19	1		
10N6G0050015	50 x 1.1/2"	122	111	85	79	19	1		
10N6G0050020	50 x 2"	122	116	85	79	23	1		
10N6G0063015	63 x 1.1/2"	143	120	103	90	19	1		
10N6G0063020	63 x 2"	143	124	103	90	23	1		

90° Elbow with Threaded Male Offtake


108500



Product Code	Size d x R	E	I	I2	A	A1	UB	UC	W
108500020005	20 x 1/2"	41	45	16	66	41	1	380	47
108500020007	20 x 3/4"	41	45	17	66	42	1	380	52
108500025005	25 x 1/2"	47	48	16	74	44	1	350	57
108500025007	25 x 3/4"	47	48	17	74	45	1	300	64
108500025010	25 x 1"	47	48	19	74	47	1	280	65
108500032007	32 x 3/4"	58	53	17	81	51	1	220	90
108500032010	32 x 1"	58	53	19	81	53	1	220	92
108500032013	32 x 1 1/4"	58	53	21	81	54	1	180	114
108500032015	32 x 1 1/2"	58	53	22	81	62	1	180	130
108500032020	32 x 2"	58	53	25	89	66	1	130	147
108500040010	40 x 1"	70	71	19	107	57	1	110	173
108500040013	40 x 1 1/4"	70	71	21	107	58	1	100	189
108500040015	40 x 1 1/2"	70	71	21	107	60	1	100	194
108500050013	50 x 1 1/4"	85	79	22	122	68	1	65	277
108500050015	50 x 1 1/2"	85	79	21	122	68	1	65	290
108500063013	60 x 1 1/4"	103	90	22	143	76	1	40	447
108500063015	63 x 1 1/2"	103	90	21	143	78	1	40	458
108500063020	63 x 2"	103	90	25	143	81	1	40	492

45° Elbow with Threaded Male Offtake


104500

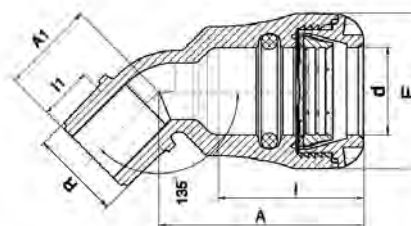

Product Code	Size d x R	E	I	I1	A	A1	UB	UC	W
104500032010	32 x 1"	58	54	19	76	35	1	220	89
104500040013	40 x 1 1/4"	70	70	21	96	40	1	120	163

90° Elbow with Threaded Female Offtake


101500

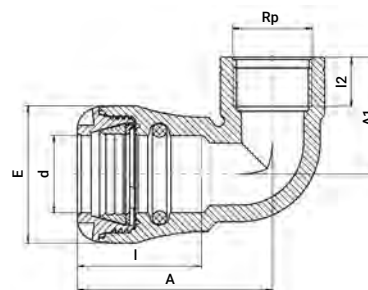

Product Code	Size d x Rp	E	I	I2	A	A1	UB	UC	W
101500020005	20 x 1/2"	41	45	17	67	39	1	300	51
101500020007	20 x 3/4"	41	45	18	67	43	1	300	55
101500020010	20 x 1"	41	45	21	67	49	1	300	64
101500025005	25 x 1/2"	47	48	17	74	40	1	280	63
101500025007	25 x 3/4"	47	48	18	74	43	1	250	70
101500025010	25 x 1"	47	48	21	74	50	1	220	82
101500032007	32 x 3/4"	58	54	18	83	45	1	220	95
101500032010	32 x 1"	58	54	21	83	49	1	200	111
101500032013	32 x 1 1/4"	58	54	24	83	60	1	150	145
101500040010	40 x 1"	70	72	21	107	51	1	110	179
101500040013	40 x 1 1/4"	70	72	24	107	61	1	100	226
101500040015	40 x 1 1/2"	70	72	24	107	65	1	90	244
101500050015	50 x 1 1/2"	85	79	24	119	63	1	60	330
101500050020	50 x 2"	85	79	29	119	75	1	55	349
101500063020	63 x 2"	103	79	29	141	70	1	35	534

90° Elbow with Threaded Brass Male Offtake


107700

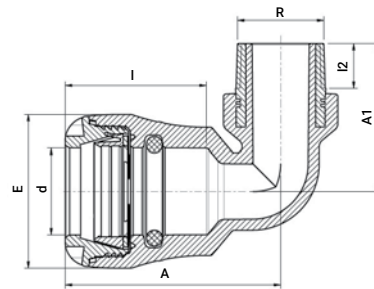

Product Code	Size d x R	E	I	I2	A	A1	UB	UC	W
107700032007	32 x 3/4"	58	53	15	81	80	1	110	239
107700032010	32 x 1"	58	53	17	81	83	1	150	172
107700032013	32 x 1 1/4"	58	53	19	81	83	1	90	285
107700032015	32 x 1 1/2"	58	53	19	81	83	1	85	305
107700040010	40 x 1"	70	59	17	104	71	1	90	239
107700040013	40 x 1 1/4"	70	59	19	104	71	1	90	295
107700040015	40 x 1 1/2"	70	59	19	104	71	1	85	341
107700050010	50 x 1"	85	79	19	116	62	1	70	337
107700050013	50 x 1 1/4"	85	79	21	116	68	1	70	384
107700050015	50 x 1 1/2"	85	79	21	116	73	1	50	431
107700050020	50 x 2"	85	79	23	116	85	1	50	538
107700063013	63 x 1 1/4"	103	90	21	143	74	1	40	559
107700063015	63 x 1 1/2"	103	90	21	143	74	1	40	592
107700063020	63 x 2"	103	90	26	143	85	1	40	726

90° Elbow with Threaded Brass Female Offtake

107600

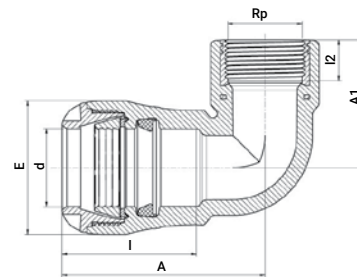

Product Code	Size d x Rp	E	I	I2	A	A1	UB	UC	W
107600032010	32 x 1"	58	53	19	73	60	1	132	187
107600040007	40 x 3/4"	70	72	16	107	51	1	120	219
107600040010	40 x 1"	70	72	19	107	60	1	90	266
107600040013	40 x 1 1/4"	70	72	21	107	67	1	90	313
107600040015	40 x 1 1/2"	70	72	21	107	70	1	85	355
107600050010	50 x 1"	85	79	19	122	60	1	70	349
107600050013	50 x 1 1/4"	85	79	21	122	67	1	60	403
107600050015	50 x 1 1/2"	85	79	21	122	73	1	60	455
107600050020	50 x 2"	85	79	26	122	84	1	50	558
107600063013	63 x 1 1/4"	103	90	21	143	68	1	40	575
107600063015	63 x 1 1/2"	103	90	21	143	72	1	40	625
107600063020	63 x 2"	103	90	26	143	82	1	35	747

PA Ball Valve

Full Bore Ball Valve With A Drain Port Option!



Features and benefits

- Full bore design minimizing pressure loss
- Two drain ports
- Rated PN16
- Glass Reinforced Polyamide body



PLASSON'S Ball Valve is produced entirely of plastic, eliminating the risk of corrosive damage to the system.


PLASSON'S Ball Valve features an option for two ISO 7-2 Rp drain ports or no drain ports. Ideally suited for draining or sampling of potable water systems and monitoring system pressure.



Removable Tamper Resistant Handle

Easily identifiable drain port option:


- Blue dot - no drain port
- Black plug - optional drain port



Two Drain Port Option

90° Elbow Female Brass Free Nut Transition

1076F0




Product Code	Size d x G	E	E1	I	I1	A	A1	UB	UC	W
1076F0025007	25x3/4"	47	32	48	15	74	83	1	125	200
1076F0032010	32x1"	58	40	54	17	83	90	1	76	320
1076F0032013	32x1 1/4"	58	49	54	17	83	103	1	50	480
1076F0040013	40x1 1/4"	70	49	72	17	107	105	1	45	550
1076F0040015	40x1 1/2"	70	54	72	19	107	116	1	35	710
1076F0050015	50x1 1/2"	85	54	79	19	119	116	1		
1076F0050020	50x2"	85	68	79	21	119	130	1	20	1130
1076F0063020	63x2"	103	68	79	21	141	130	1		

PA Ball Valve Series 1 x Series 1

NEW!

037100

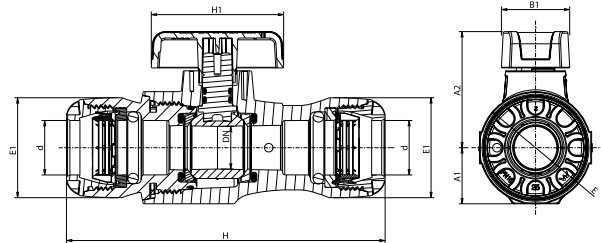


Product Code	Size d	Rp	DN	A1	A2	H	E	E1	UC	W
03710S00025	25	1/8"	20	27	54	150	53	47	105	230
03710S00032	32	1/8"	25	33	64	170	64	58	60	390

* 03710SF - with drain port | * 03710SF - con sistema de purga

PA Ball Valve Series 1 x Male

NEW!

0371002

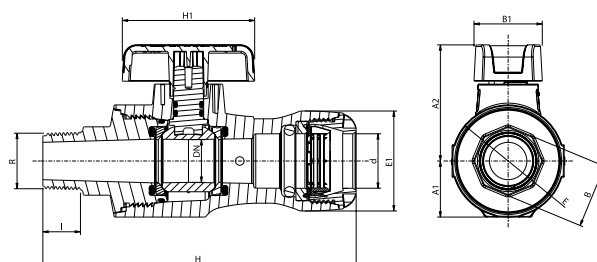


Product Code	Size dxR	Rp	DN	A1	A2	H	I2	B	E	E1	UC	W
03710020S00025007	25 x 3/4"	1/8"	20	27	54	148	18	30	53	47	110	220
03710020S00032010	32 x 1"	1/8"	25	33	64	165	21	41	64	58	45	370

* 03710020SF - with drain port | * 03710020SF - con sistema de purga

PA Ball Valve Series 1 x Female

NEW!

0371003

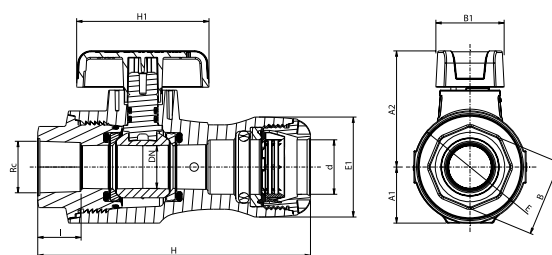


Product Code	Size dxRc	Rp	DN	A1	A2	H	I2	B	E	E1	UC	W
03710030S00025007	25 x 3/4"	1/8"	20	27	54	129	19	36	53	47	90	210
03710030S00032010	32 x 1"	1/8"	25	33	64	148	22	46	64	58	60	360

* 03710030SF - with drain port | * 03710030SF - con sistema de purga

PA Ball Valve Series 1 x Free Nut

NEW!

0371016

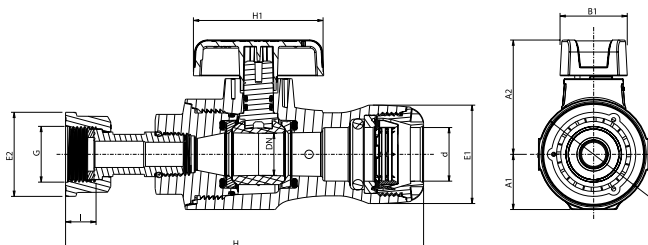


Product Code	Size dxG	Rp	DN	A1	A2	H	E	E1	E1	UC	W
0371016S00025007	25 x 3/4"	1/8"	20	27	54	171	53	47	40	100	250
0371016S00025010	25 x 1"	1/8"	25	27	54	179	53	47	48	95	260
0371016S00032010	32 x 1"	1/8"	32	33	64	192	64	57	48	55	420

* 0371016SF - with drain port | * 0371016SF - con sistema de purga

Compression Stoptap


034100

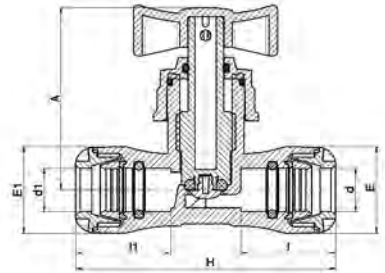

Product Code	Size d x d1	E	H	I	I1	A	E1	UB	UC	W
034100020	20 x 20	41	123	45	—	89	—	1	130	145
034100025	25 x 25	47	134	48	—	89	—	1	130	167
034100025020	25 x 20	47	129	48	45	89	42	1	130	161
034100032	32 x 32	58	152	54	—	89	—	1	80	225

Stoptap - Copper Pipe Adaptor


0341C0

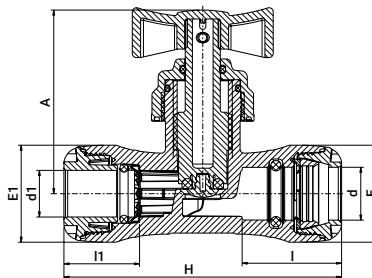

Product Code	Size d x d1	E	H	I	I1	A	E1	UB	UC	W
0341C0020015	20 x 15	41	123	45	45	89	41	1	130	149
0341C0025015	25 x 15	47	129	48	46	89	42	1	130	165
0341C0025022	25 x 22	47	134	48	48	89	47	1	130	171
0341C0032028	32 x 28	58	159	54	54	89	58	1	80	223

Free Nut Union for Water Meter


0358916

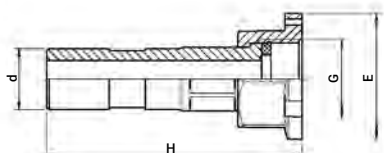

Product Code	Size d x G	E	H	UB	UC	W
0358916020	20 x 3/4"	42	86	1	150	75
0358916025	25 x 1"	50	90	1	150	111

Free Nut Adaptor with Check Valve

0358917

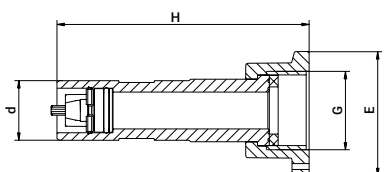

Product Code	Size d x G	E	H	UB	UC	W
0358917020	20 x 3/4"	44	86	10	300	40
0358917025	25 x 1"	50	90	10	300	58

PLASSON Series 1 Wrench

109900



Product Code	Size	UB	UC	W
10990004P	20 - 32	—	300	72
10990002P	40 - 63	—	100	285

Chamfer Tool for PE Pipes


189600



Product Code	Size	UB	UC	W
189600063020P	20 - 63	1	180	86

Nut

100040



Product Code	Size d	D	H	UB	UC	W
100040020P	20	40	22	50	1400	7
100040025P	25	45	22	50	1200	8
100040032P	32	57	24	50	900	15
100040040P	40	68	33	50	500	29
100040050P	50	83	37	—	300	44
100040063P	63	100	43	—	200	60

NBR O-Ring

100020



Product Code	Pipe Size	E	e	UB	UC	W
100020020P	20	19	4	50	32000	1
100020025P	25	24	5	50	16000	2
100020032P	32	31	6	50	10000	4

EPDM O-Ring


10002D



Product Code	Pipe Size	E	e	UB	UC	W
10002D020	20	19	4	50	32000	1
10002D025	25	24	5	50	16000	2
10002D032	32	31	6	50	8000	4

NBR Shaped Seal


100029



Product Code	Pipe Size	E	e	UB	UC	W
100029040P	40	38	10	50	4000	8
100029050P	50	49	10	50	2500	11
100029063P	63	61	11	50	2000	15

EPDM Shaped Seal


10002D9



Product Code	Pipe Size	E	e	UB	UC	W
10002D940	40	38	10	50	4000	7
10002D950	50	48.6	10	50	2500	9
10002D963	63	60.6	11	50	2000	13

Split Ring


100030



Product Code	Size d	D	H	UB	UC	W
100030020P	20	27	9	50	6000	2
100030025P	25	33	9	50	4500	3
100030032P	32	42	11	50	2000	4
100030040P	40	52	14	50	1600	14
100030050P	50	64	17	50	500	14
100030063P	63	81	21	50	500	27

Grip Ring


100080



Product Code	Size d	D	H	h	UB	UC	W
100080020P	20	27	4	2	50	7000	1
100080025P	25	33	4	2	50	5500	1
100080032P	32	42	4	2	50	3000	1
100080040P	40	52	4	2	50	2500	2
100080050P	50	64	4	3	50	1000	3
100080063P	63	80	5	3	50	1000	6


PVC Pipe Adaptor Kit

1091Q0

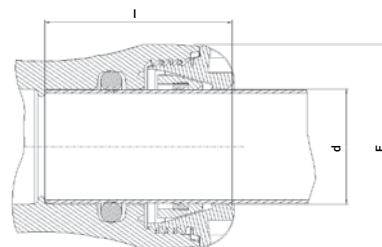


Product Code	Size d	E	I	UB	UC	W
1091Q0025	25	47	48	1	500	26
1091Q0032	32	58	53	1	400	31
1091Q0040	40	70	70	1	300	56
1091Q0050	50	85	78	1	200	72
1091Q0063	63	103	90	1	130	134



Installation Instructions

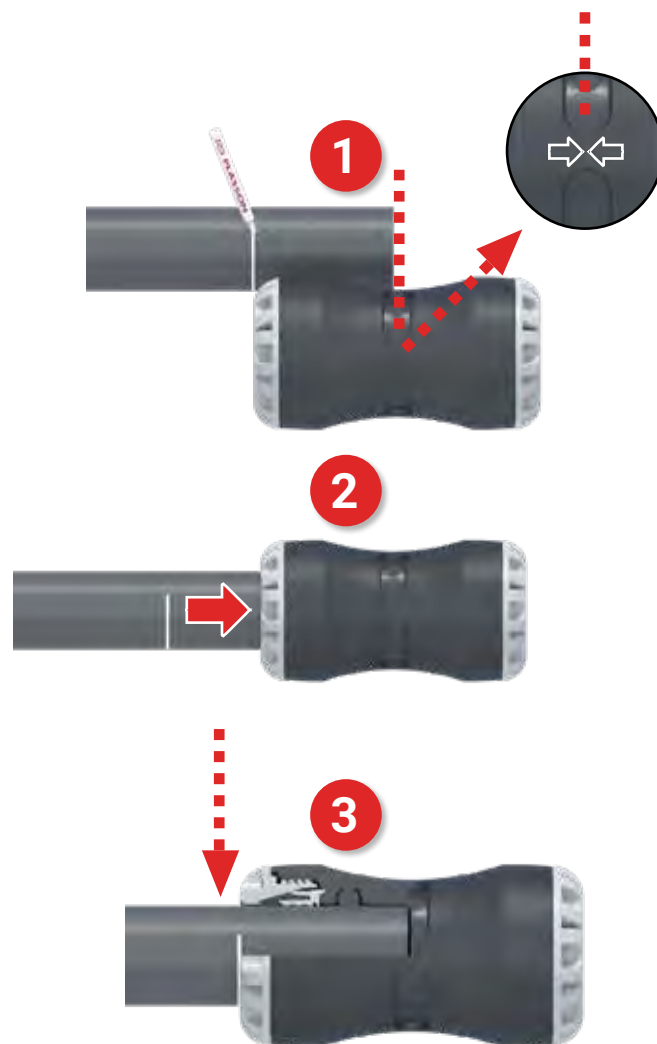

Disassembly

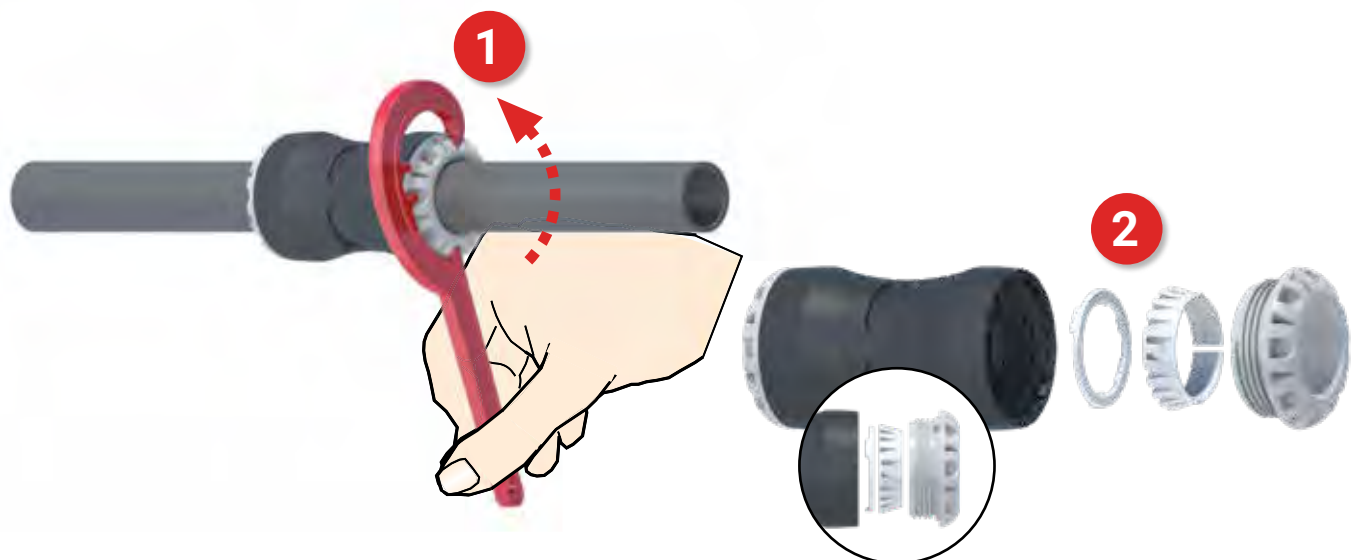

Assembly Instructions PVC Pipe Kit

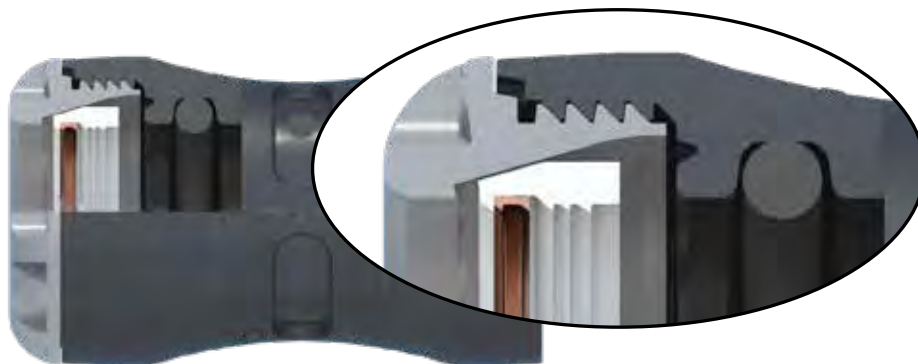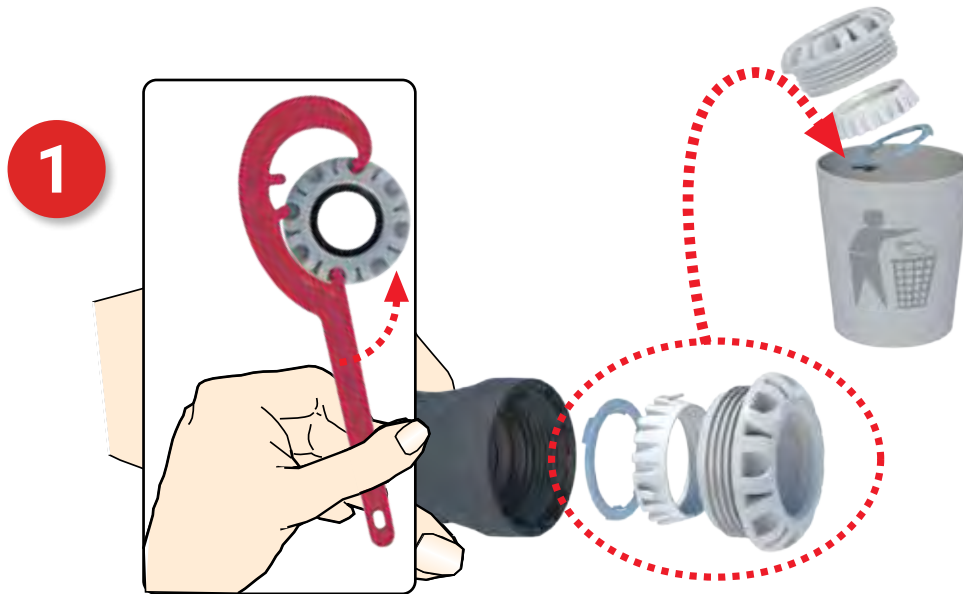

Plasson Universal Slip Repair Coupler Assembly Instructions

1



2



3



1. Mark pipe insertion depth on the pipe (approximately half the fitting length). Undo nuts 1 to 2 turns while ensuring they remain on the fitting.
2. Insert the pipe until the mark reaches the end of the nut.
3. While holding the fitting body with a Plasson wrench (or a similar tool) tighten the nut firmly with a second wrench.

Note: If the fitting is reused, make sure metal teeth are present in the split ring.




PLASSON G-PLASS - Features and Benefits:

- Designed, tested, and approved for use in gas systems in accordance with ISO 17885 standard.
- Diameters 32-63 mm in various geometries: couplers, elbows, tees and threaded male transitions.
- Fast and simple assembly, ideal for house connections.
- Compact size - enables assembly in confined spaces.
- Designed to accommodate PLASSON EFV (Excess Flow Valve).
- Multiple sealing elements ensuring leak-tight assembly.
- Full end load performance.
- Approvals:
 - ISO 17885 for Gas
 - DVGW G 5600-2

Coupler


150100



Product Code	Size d	E	H	I	UB	UC	W
150100020	20	40	98	48			
150100025	25	46	106	52			
150100032	32	58	112	55	1	120	180
150100040	40	70	148	73	1	60	340
150100050	50	85	167	82	1	40	530
150100063	63	103	192	95	1	25	860

Reducing Coupler

151100



Product Code	Size d	E	E1	H	I	L1	UB	UC	W
151100025020	25 x 20	47	40	108	52	48			
151100032020	32 x 20	58	41	112	56	48			
151100032025	32 x 25	58	47	116	56	52			
151100040032	40 x 32	70	58	144	74	57	1	65	280
151100050032	50 x 32	85	58	158	83	57	1	50	390
151100050040	50 x 40	85	70	172	83	57	1	40	460
151100063032	63 x 32	103	58	177	96	57	1	35	600
151100063040	63 x 40	103	70	192	96	75	1	30	660
151100063050	63 x 50	103	85	196	96	85	1	25	740

45° Elbow


150600



Product Code	Size d	E	A	I	UB	UC	W
150600032	32	58	69	56	1	100	200
150600040	40	70	91	74	1	50	370
150600050	50	85	104	83	1	40	580
150600063	63	103	123	95	1	20	970

90° Elbow


150500



Product Code	Size d	E	A	I	UB	UC	W
150500020	20	40	70	48			
150500025	25	47	77	52			
150500032	32	58	83	56	1	90	210
150500040	40	70	109	73	1	50	400
150500050	50	85	123	82	1	35	620
150500063	63	103	146	95	1	16	1050

90° Tee


150400



Product Code	Size d	E	A	H	I	UB	UC	W
150400020	20	40	75	129	48			
150400025	25	47	82	142	53			
150400032	32	58	86	156	56	1	70	300
150400040	40	70	111	198	73	1	30	570
150400050	50	85	128	223	82	1	20	890
150400063	63	103	152	271	95	1	10	1510

90° Reducing Tee


153400



Product Code	Size d	A	E	E1	H	I	L1	UB	UC	W
153400025020	25 x 20 x 25	77	47	41	142	52	49			
153400032020	32 x 20 x 20	78	58	41	156	56	49			
153400032025	32 x 25 x 32	85	58	47	156	56	53			
153400040032	40 x 32 x 40	95	70	58	198	73	56	1	40	490
153400050032	50 x 32 x 50	100	85	58	223	82	56	1	25	710
153400063032	63 x 32 x 63	102	103	58	271	95	56	1	15	1150

Male Adaptor


150200



Product Code	Size dxR	E	H	I	L2	UB	UC	W
150200020005	20 x 1/2"	40	73	48	17			
150200020007	20 x 3/4"	40	74	48	18			
150200025005	25 x 1/2"	47	79	51	17			
150200025007	25 x 3/4"	47	80	51	18			
150200025010	25 x 1"	47	82	51	20			
150200032010	32 x 1"	58	87	57	19	1	220	120
150200040013	40 x 1 1/4"	70	109	76	21	1	120	200
150200050015	50 x 1 1/2"	85	118	85	21	1	40	310
150200063020	63 x 2"	103	133	97	25	1	45	500

Male Adaptor with Threaded Brass Offtake


157200



Product Code	Size dxR	E	H	I	L2	UB	UC	W
157200020005	20 x 1/2"	40	70	48	13			
157200025007	25 x 3/4"	47	75	52	15			
157200032010	32 x 1"	58	95	57	17	1	150	180
157200040013	40 x 1 1/4"	70	117	76	19	1	80	320
157200050015	50 x 1 1/2"	85	126	85	19	1	60	450
157200063020	63 x 2"	103	144	97	23	1	35	710

End Cap Body for Gas


151200



Product Code	Size d	E	H	I	UB	UC	W
151200020	20	40	59	48			
151200025	25	47	65	52			
151200032	32	58	70	55	1	130	110
151200040	40	70	93	74	1	100	200
151200050	50	85	106	84	1	70	310
151200063	63	103	122	95	1	40	510

G-PLASS Liner


159511

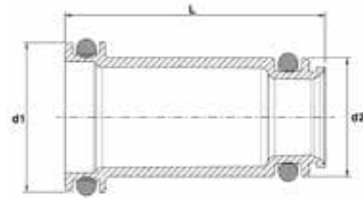

Product Code	Size d	L	d1	d2	UB	UC	W
159511020P	20	55	20	13			
159511025P	25	45	25	18			
159511032P	32	55	31.7	25.0	20	920	10
159511040P	40	68	38.7	31.2	10	480	30
159511050P	50	76	48.9	39.3	5	240	50
159511063P	63	85	62.8	50.0	5	110	60

G-PLASS Nut


150040



Product Code	Size d	D	H	UB	UC	W
150040020P	20	22	25			
150040025P	25	26	26			
150040032P	32	56,4	26,2	50	900	20
150040040P	40	68,0	35,6	20	500	40
150040050P	50	82,5	41,4	10	300	70
150040063P	63	99,3	47,7	10	200	110

G-PLASS Split Ring


150030



Product Code	Size d	D	H	UB	UC	W
150030020P	20	29	14			
150030025P	25	34	15			
150030032P	32	44,1	15,8	50	2000	10
150030040P	40	53,1	21,5	50	1600	10
150030050P	50	66,0	25,5	50	500	20
150030063P	63	84,5	27,6	50	500	30

G-PLASS O-Ring/Shaped Seal

150020/100029



Product Code	Size d	E	e	UB	UC	W
150020020P	20	14	3.5			
150020025P	25	12	4			
150020032P	32	31	6			
150029040P*	40	38	10	50	4000	10
150029050P*	50	49	10	50	2500	10
150029063P*	63	61	11	50	2000	20

* Shaped Seal

G-PLASS Wrench

159900



Product Code	Size	UB	UC	W
15990002P	32-63		100	130

G-PLASS Integral Chamfer Tool

159600



Product Code	Size	UB	UC	W
159600063020	20-63		90	250

08019232


GPLASS

Trusted Gas Fitting

1




2

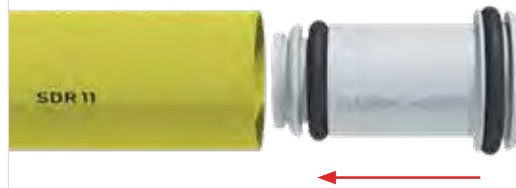

3



4

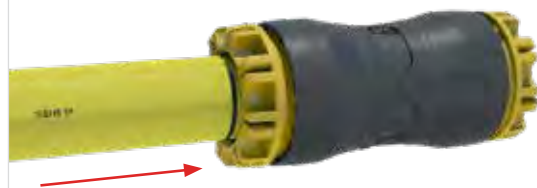

5



6



Instruction For Use



08019232

GPLASS
Trusted Gas Fitting

1




2




3




4

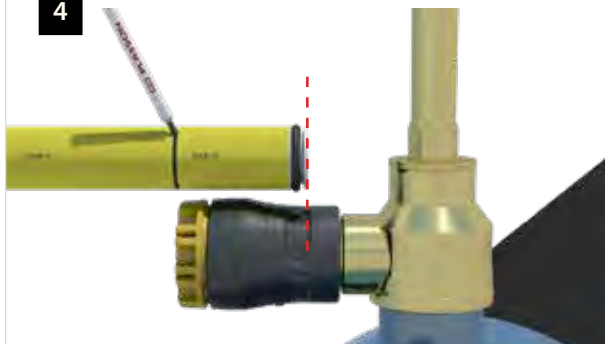

5

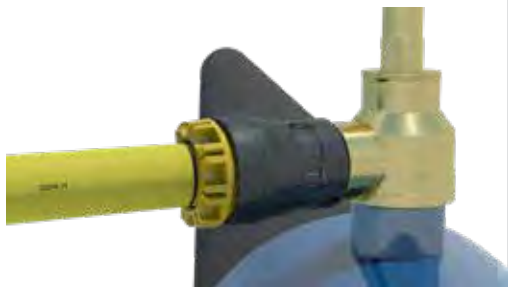

6

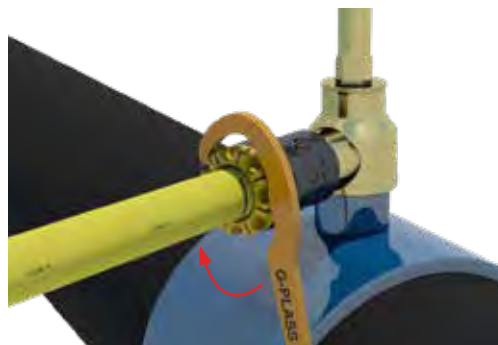

7



Instruction For Use





 PLASSON

SILVER LINE FITTINGS

Silver Line

140100

Page 248

Coupling
Enlace Recto



141100

Page 249

Reducing Coupling



140200

Page 249

Male Adaptor
Enlace Mixto Rosca Macho



140300

Page 250

Female Adaptor
Enlace Mixto Rosca Hembra



141200

Page 250

End Plug
Tapón Final



140400

Page 251

90° Tee
Te de 90°



141400

Page 251

90° Tee with Threaded
Female Offtake
Te de 90° Compresión
Rosca Hembra



148400

Page 252

90° Tee with Threaded
Male Offtake
Te de 90° Compresión
Rosca Macho



143400

Page 252

90° Reducing Tee With
Irrifit Outlet
Te de 90° Reductor



140500

Page 253

90° Elbow
Codo de 90°



141500

Page 253

90° Elbow with Threaded
Female Offtake
Codo de 90° Compresión
Rosca Hembra



148500

Page 254

90° Elbow with Threaded
Male Offtake
Codo de 90° Compresión
Rosca Macho



146500

Page 254


Corner Elbow
Codo de Esquina



149300

Page 255

Reducing Set
Juego Reductor



1401M0

Page 255

Coupler Union Adaptor
Enlace Recto Con Racor



1498M0

Page 256

Union Adaptor
Adaptador A Rosca Macho



142500

Page 256

Threaded Adaptor
Adaptador Roscado



078901

Page 257

Threaded Male Adaptor
Adaptador Compresión
Rosca Macho



MECHANICAL FITTINGS

ELECTROFUSION FITTINGS

TOOLING

SERIES 1

SILVER LINE

148940

Page 257

Nut Threaded Adaptor
Tuerca para Adaptador de
Compresión



140040

Page 258

Nut
Racor



140030

Page 258

Split Ring - Polyacetal
Casquillo de Apriete (acetal)



070020

Page 259

O-Ring
Junta Tórica/Seiil



140050

Page 259


Insert
Inserto de PP



Coupling

140100

Enlace Recto

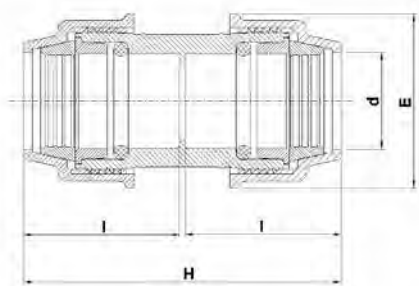


Product Code	Size d x d	E	H	I	UB	UC	W
140100016	16 x 16	39	105	50	10	400	50
140100020	20 x 20	42	90	44	10	500	40
140100025	25 x 25	50	98	48	10	300	60
140100032	32 x 32	61	114	56	10	160	100
140100040	40 x 40	73	127	62	—	100	150
140100050	50 x 50	92	146	71	—	60	250
140100063	63 x 63	106	167	82	—	40	400

Reducing Coupling

141100

Enlace Recto Reductor

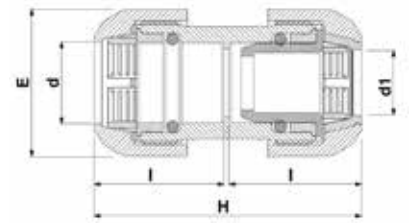


Product Code	Size d x d	E	H	I	UB	UC	W
141100025020	25x20	50	98	48	10	240	70
141100032020	32x20	61	114	56	10	160	120
141100032025	32x25	61	114	56	10	160	120
141100040025	40x25	73	127	62	—	120	200
141100040032	40x32	73	127	62	—	120	180
141100050025	50x25	92	146	71	—	60	340
141100050032	50x32	92	146	71	—	60	340
141100050040	50x40	92	146	71	—	60	330
141100063025	63x25	106	167	82	—	40	520
141100063032	63x32	106	167	82	—	40	510
141100063040	63x40	106	167	82	—	40	510
141100063050	63x50	106	167	82	—	40	420

Male Adaptor

140200

Enlace Mixto Rosca Macho




Product Code	Size d x R	E	H	I	I2	UB	UC	W
140200016003	16 x 3/8"	32	73	59	13	10	500	30
140200016005	16 x 1/2"	39	79	59	16	10	500	30
140200016007	16 x 3/4"	39	80	59	17	10	500	30
140200020005	20 x 1/2"	42	71	50	17	10	600	20
140200020007	20 x 3/4"	42	71	50	18	10	600	20
140200020010	20 x 1"	50	77	50	20	10	480	40
140200025005	25 x 1/2"	50	75	54	17	10	480	30
140200025007	25 x 3/4"	50	75	54	17	10	480	40
140200025010	25 x 1"	50	77	50	18	10	480	40
140200032007	32 x 3/4"	61	82	66	20	10	280	60
140200032010	32 x 1"	61	84	60	18	10	280	60
140200032013	32 x 1 1/4"	61	86	58	20	10	280	70
140200032015	32 x 1 1/2"	73	98	73	22	—	150	130
140200040010	40 x 1"	73	97	73	22	—	150	90
140200040013	40 x 1 1/4"	73	99	73	20	—	150	90
140200040015	40 x 1 1/2"	73	98	73	22	—	150	100
140200040020	40 x 2"	92	110	80	26	—	100	220
140200050015	50 x 1 1/2"	92	107	80	22	—	100	150
140200050020	50 x 2"	92	110	90	26	—	100	150
140200063020	63 x 2"	106	120	99	26	—	60	270

Female Adaptor

140300

Enlace Mixto Rosca Hembra

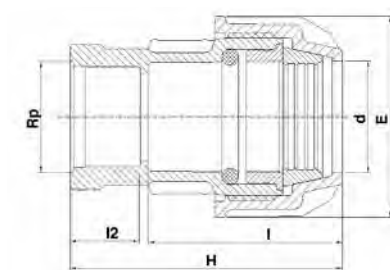


Product Code	Size d x Rp	E	H	I	I2	UB	UC	W
140300016005	16 x 1/2"	39	77	55	19	10	500	40
140300016007	16 x 3/4"	39	79	56	19	10	500	40
140300020005	20 x 1/2"	42	71	51	18	10	600	30
140300020007	20 x 3/4"	42	72	51	19	10	600	30
140300020010	20 x 1"	50	80	54	21	10	300	30
140300025007	25 x 3/4"	50	75	54	19	10	400	40
140300025010	25 x 1"	50	80	54	21	10	400	40
140300032007	32 x 3/4"	61	82	61	19	10	280	60
140300032010	32 x 1"	61	84	61	21	10	230	60
140300032013	32 x 1 1/4"	73	101	73	25	5	150	70
140300032015	32 x 1 1/2"	73	101	73	25	—	150	120
140300040010	40 x 1"	73	97	73	21	—	150	100
140300040013	40 x 1 1/4"	73	101	73	25	—	150	110
140300040015	40 x 1 1/2"	73	101	73	25	—	150	120
140300050015	50 x 1 1/2"	92	107	82	25	—	90	170
140300050020	50 x 2"	92	112	82	30	—	90	190
140300063020	63 x 2"	106	119	86	30	—	60	260

End Plug

141200

Tapón Final




Product Code	Size d	E	H	I	UB	UC	W
141200025	25	50	59	48	10	520	30
141200032	32	61	67	54	10	330	53
141200040	40	73	80	67	—	180	80
141200050	50	92	93	71	—	100	54
141200063	63	105	112	80	—	60	86

90° Tee

140400

Te de 90°




Product Code	Size d x d x d	E	H	I	A	UB	UC	W
140400016	16 x 16 x 16	39	126	50	63	10	200	79
140400020	20 x 20 x 20	42	113	43	57	10	250	77
140400025	25 x 25 x 25	50	124	47	60	10	170	85
140400032	32 x 32 x 32	61	150	56	75	5	100	148
140400040	40 x 40 x 40	73	173	62	86	—	60	244
140400050	50 x 50 x 50	92	207	74	104	—	32	394
140400063	63 x 63 x 63	106	239	82	119	—	20	643

90° Tee with Threaded Female Offtake

141400

Te de 90° Compresión Rosca Hembra

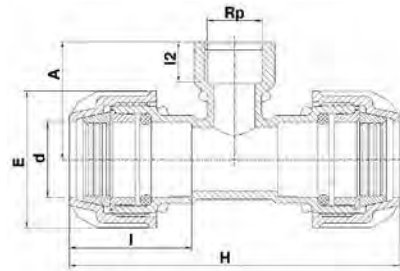


Product Code	Size d x Rp x d	E	H	I	I2	A	UB	UC	W
141400016005	16 x 1/2" x 16	39	124	51	19	30	10	240	66
141400016007	16 x 3/4" x 16	39	122	50	19	30	10	240	59
141400020005	20 x 1/2" x 20	42	113	44	18	43	10	320	48
141400020007	20 x 3/4" x 20	42	113	44	19	45	10	320	50
141400025005	25 x 1/2" x 25	50	123	48	18	45	10	200	71
141400025007	25 x 3/4" x 25	50	123	48	19	48	10	200	71
141400025010	25 x 1" x 25	50	123	48	21	50	10	200	75
141400025013	25 x 1 1/4" x 25	73	173	62	25	67	5	70	—
141400032005	32 x 1/2" x 32	61	150	56	18	49	5	120	120
141400032007	32 x 3/4" x 32	61	150	56	19	52	5	120	118
141400032010	32 x 1" x 32	61	150	56	21	55	5	120	123
141400032013	32 x 1 1/4" x 32	73	173	62	25	67	5	70	270
141400032015	32 x 1 1/2" x 32	73	173	62	25	68	5	60	280
141400040010	40 x 1" x 40	73	173	62	21	63	—	70	188
141400040013	40 x 1 1/4" x 40	73	173	62	25	67	—	70	207
141400040015	40 x 1 1/2" x 40	73	173	62	25	68	—	60	204
141400040020	40 x 2" x 40	92	200	72	30	79	—	40	490
141400050015	50 x 1 1/2" x 50	92	200	72	25	73	—	40	323
141400050020	50 x 2" x 50	92	200	72	30	79	—	40	348
141400063020	63 x 2" x 63	106	239	82	30	86	—	20	522

90° Tee with Threaded Male Offtake

148400

Te de 90° Compresión Rosca Macho

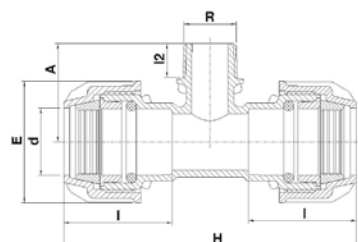


Product Code	Size d x R x d	E	H	I	I2	A	UB	UC	W
148400016005	16 x 1/2" x 16	42	113	44	17	44	10	300	33
148400016007	16 x 3/4" x 16	39	113	44	18	45	10	300	35
148400020005	20 x 1/2" x 20	42	113	44	17	44	10	300	44
148400020007	20 x 3/4" x 20	42	113	44	18	45	10	300	45
148400025005	25 x 1/2" x 25	50	124	48	17	45	10	220	63
148400025007	25 x 3/4" x 25	50	124	48	18	47	10	220	67
148400032007	32 x 3/4" x 32	61	150	56	18	49	5	120	112
148400032010	32 x 1" x 32	61	150	56	20	53	5	120	114
148400040010	40 x 1" x 40	73	173	62	20	65	—	70	182
148400040013	40 x 1 1/4" x 40	73	173	62	22	68	—	70	189
148400040015	40 x 1 1/2" x 40	73	173	62	22	69	—	70	192
148400050015	50 x 1 1/2" x 50	92	207	72	22	73	—	40	308
148400050020	50 x 2" x 50	92	207	72	26	77	—	40	316
148400063020	63 x 2" x 63	106	239	82	26	84	—	24	486

90° Reducing Tee with Irrifit Outlet

143400

Te de 90° Reductor




Product Code	Size d x d1 x d	E	H	I	A	UB	UC	W
143400020016	20 x 16 x 20	42	113	44	48	10	300	60
143400025016	25 x 16 x 25	50	124	48	50	10	200	70
143400032016	32 x 16 x 32	61	150	56	54	5	100	120
143400020020						10	180	70
143400025020	25 x 20 x 25	50	124	47	60	5	170	80
143400032020	32 x 20 x 32	61	150	56	75	5	100	170
143400032025	32 x 25 x 32	61	150	56	75	5	100	170
143400040025	40 x 25 x 40	73	173	62	86		60	290
143400040032	40 x 32 x 40	73	173	62	86		60	250
143400050025	50 x 25 x 50	92	207	74	104		32	500
143400050032	50 x 32 x 50	92	207	74	104		32	500
143400050040	50 x 40 x 50	92	207	74	104		32	500
143400063032	63 x 32 x 63	106	239	82	119		20	770
143400063040	63 x 40 x 63	106	239	82	119		20	770
143400063050	63 x 50 x 63	106	239	82	119		20	680

90° Elbow

140500

Codo de 90°




Product Code	Size d x d	E	I	A	UB	UC	W
140500016	16 x 16	39	51	64	10	350	50
140500020	20 x 20	42	43	57	10	440	38
140500025	25 x 25	50	47	62	10	250	59
140500032	32 x 32	61	56	75	10	150	102
140500040	40 x 40	73	62	86	—	90	164
140500050	50 x 50	92	74	104	—	50	276
140500063	63 x 63	106	82	119	—	32	442

90° Elbow with Threaded Female Offtake

141500

Codo de 90° Compresión Rosca Hembra




Product Code	Size d x Rp	E	I	I2	A	A1	UB	UC	W
141500016005	16 x 1/2"	39	50	19	66	39	10	500	39
141500016007	16 x 3/4"	39	33	19	57	45	—	—	—
141500020005	20 x 1/2"	42	44	17	56	42	10	600	29
141500020007	20 x 3/4"	42	44	18	56	42	10	500	30
141500025005	25 x 1/2"	50	48	18	68	45	10	380	44
141500025007	25 x 3/4"	50	48	18	68	45	10	380	43
141500025010	25 x 1"	50	48	21	68	50	10	340	48
141500032007	32 x 3/4"	61	56	18	75	47	10	220	64
141500032010	32 x 1"	61	56	21	75	60	10	200	70
141500032013	32 x 1 1/4"	61	56	25	75	66	10	160	91
141500040013	40 x 1 1/4"	73	62	25	86	70	—	120	130
141500040015	40 x 1 1/2"	73	62	25	86	70	—	110	141
141500040020	40 x 2"	92	72	30	102	79	70	1	300
141500050015	50 x 1 1/2"	92	74	25	102	79	—	70	203
141500050020	50 x 2"	92	74	30	102	79	—	70	226
141500063020	63 x 2"	106	82	30	115	86	—	44	327

90° Elbow with Threaded Male Offtake

148500

Codo de 90° Compresión Rosca Macho




Product Code	Size d x R	E	I	I2	A	A1	UB	UC	W
148500016005	16 x 1/2"	39	58	17	70	44	10	600	28
148500016007	16 x 3/4"	39	58	18	70	45	10	600	28
148500020005	20 x 1/2"	42	43	17	57	44	10	600	26
148500020007	20 x 3/4"	42	43	18	57	45	10	600	29
148500025005	25 x 1/2"	50	47	17	62	45	10	400	36
148500025007	25 x 3/4"	50	47	18	62	47	10	400	39
148500025010	25 x 1"	50	47	19	62	49	10	400	39
148500032005	32 x 1/2"	61	56	17	75	49	10	240	65
148500032007	32 x 3/4"	61	56	18	75	49	10	240	62
148500032010	32 x 1"	61	56	20	75	53	10	240	66
148500040010	40 x 1"	73	62	20	86	65	—	120	103
148500040013	40 x 1 1/4"	73	62	22	86	68	—	120	114
148500040015	40 x 1 1/2"	73	62	22	86	69	—	120	121
148500050015	50 x 1 1/2"	92	74	22	104	73	—	70	176
148500050020	50 x 2"	92	74	26	104	77	—	70	192
148500063020	63 x 2"	106	82	26	119	84	—	48	248

Corner Elbow

146500

Codo de Esquina





Product Code	Size d x Rp	E	I	I2	A	A1	UB	UC	W
146500020005	20 x 1/2"	42	39	17	58	30	10	350	50
146500025005	25 x 1/2"	50	44	17	62	30	10	250	70
146500025007	25 x 3/4"	50	44	17	62	30	10	250	60

Reducing Set

149300

Juego Reductor

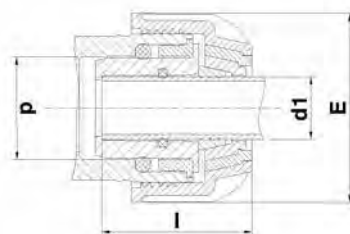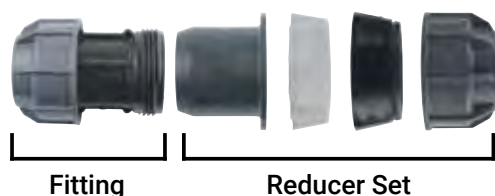


Product Code	Size d x d1	E	I	UB	UC	W
149300025020	25 x 20	50	42	10	450	28
149300032020	32 x 20	61	48	10	400	33
149300032025	32 x 25	61	46	10	360	29
149300040020	40 x 20	73	55	10	180	60
149300040025	40 x 32	73	55	10	180	70
149300040032	40 x 32	73	55	10	250	48
149300050025	50 x 25	92	59	5	200	83
149300050032	50 x 32	92	64	5	200	79
149300050040	50 x 40	92	62	5	200	75
149300063025	63 x 25	106	63	1	100	150
149300063032	63 x 32	106	68	1	100	144
149300063040	63 x 40	106	74	1	100	136
149300063050	63 x 50	106	72	1	100	128

Coupler Union Adaptor

1401M0

Enlace Recto Con Racor

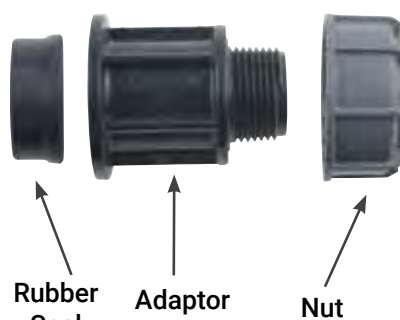


Product Code	Size d x d1	UB	UC	W
1401M0032007	32 x 3/4"	5	100	9
1401M0032010	32 x 1"	5	100	12
1401M0040010	40 x 1"	—	60	13
1401M0040015	40 x 1 1/2"	—	60	14
1401M0050015	50 x 1 1/2"	—	40	24
1401M0050020	50 x 2"	—	40	23
1401M0063015	63 x 1 1/2"	—	25	38
1401M0063020	63 x 2"	—	25	49

Union Adaptor

1498M0

Adaptador A Rosca Macho

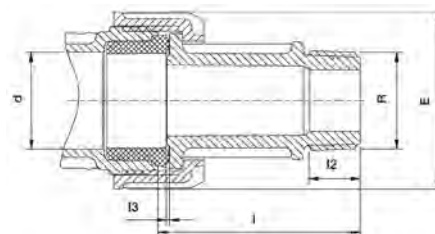


Product Code	Size d x R	E	I	I2	I3	UB	UC	W
1498M0032007	32 x 3/4"	61	68	18	1	1	180	77
1498M0032010	32 x 1"	61	69	20	1	1	180	55
1498M0040010	40 x 1"	73	70	20	1	1	130	142
1498M0040015	40 x 1 1/2"	73	71	22	1	1	130	89
1498M0050015	50 x 1 1/2"	92	73	24	1	1	80	126
1498M0050020	50 x 2"	92	79	27	1	1	80	133
1498M0063015	63 x 1 1/2"	106	75	22	1	1	60	—
1498M0063020	63 x 2"	106	77	26	1	1	60	306

Threaded Adaptor

142500

Adaptador Roscado




Product Code	Size d x R	E	H	I2	UB	UC	W
142500032005	32 x 1/2"	61	84	17	1	180	50
142500032007	32 x 3/4"	61	85	18	1	180	50
142500032010	32 x 1"	61	87	20	1	180	52
142500040010	40 x 1"	74	99	20	1	130	75
142500040013	40 x 1 1/4"	74	100	22	1	130	77
142500040015	40 x 1 1/2"	74	100	22	1	130	82
142500050010	50 x 1"	92	102	20	1	80	118
142500050013	50 x 1 1/4"	92	104	22	1	80	122
142500050015	50 x 1 1/2"	92	104	22	1	80	120
142500050020	50 x 2"	92	107	26	1	80	130
142500063010	63 x 1"	106	118	20	1	60	186
142500063013	63 x 1 1/4"	106	121	22	1	60	189
142500063015	63 x 1 1/2"	106	121	22	1	60	191
142500063020	63 x 2"	106	124	26	1	60	196
142500063025	63 x 2 1/2"	106	126	29	1	60	210

Threaded Male Adaptor

078901

Adaptador Compresión Rosca Macho



Product Code	Size d x R	L	I1	I2	UB	UC	W
078901025005P	25 x 1/2"	79	29	17	10	500	17
078901025007P	25 x 3/4"	80	29	18	10	500	20
078901032005P	32 x 1/2"	84	27	17	10	400	34
078901032007P	32 x 3/4"	85	27	18	10	400	35
078901032010P	32 x 1"	87	27	20	10	400	37
078901040010P	40 x 1"	99	33	20	—	220	54
078901040013P	40 x 1 1/4"	100	33	22	—	220	57
078901040015P	40 x 1 1/2"	100	33	22	—	220	61
078901050010P	50 x 1"	102	34	20	—	140	80
078901050013P	50 x 1 1/4"	104	34	22	—	140	40
078901050015P	50 x 1 1/2"	104	34	22	—	140	84
078901050020P	50 x 2"	107	34	26	—	140	91
078901063010P	63 x 1"	118	50	20	—	80	178
078901063013P	63 x 1 1/4"	121	50	22	—	80	140
078901063015P	63 x 1 1/2"	121	50	22	—	80	140
078901063020P	63 x 2"	124	50	26	—	80	146
078901063025P	63 x 2 1/2"	126	50	29	—	80	158

Nut for Threaded Adaptor

148940

Tuerca para Adaptador de Compresión



Product Code	Size d	UB	UC	W
148940032P	32	10	400	15
148940040P	40	—	200	20
148940050P	50	—	140	40
148940063P	63	5	120	70

Nut

140040

Racor



Product Code	Size d	UB	UC	W
140040016P	16	—	—	10
140040020P	20	10	1600	8
140040025P	25	10	1000	12
140040032P	32	10	500	21
140040040P	40	—	330	34
140040050P	50	—	180	68
140040063P	63	—	100	110

Split Ring - Polyacetal

140030

Casquillo de Apriete (acetal)



Product Code	Size d	UB	UC	W
070030016P	16	100	12000	1
140030020P	20	100	12000	2
140030025P	25	100	7000	3
140030032P	32	50	4200	4
140030040P	40	—	2000	8
140030050P	50	—	1200	12
140030063P	63	—	600	24

O-Ring

070020

Junta Tórica/Seil



Product Code	Size d	E1	e	UB	UC	W
070020016	16	15	3	100	30000	1
070020020	20	19	3	100	32000	1
070020025	25	24	4	100	12000	1
070020032	32	31	5	100	8000	2
070020040	40	39	6	50	4000	5
070020050	50	49	7	50	2500	8
070020063	63	62	7	50	2000	10

Insert

140050

Inserto de PP



Product Code	Size d	UB	UC	W
070050016P	16	100	8700	1
140050020P	20	100	10000	1
140050025P	25	—	5500	2
140050032P	32	50	3000	4
140050040P	40	—	2000	6
140050050P	50	—	1000	9
140050063P	63	—	500	15

Technical Specifications

Installation Instructions For Fittings

16mm - 63mm

- Cut the pipe square, chamfer the end of the pipe
- Undo the nut to the last thread. Leave the nut on the fitting while inserting the pipe.
- Twist the pipe into the fitting* through the split ring and rubber seal to the pipe stop Tighten the nut firmly. Use a PLASSON wrench (or similar tool) for final tightening of sizes 40 and above.
- The nut should be closed tightly, however there is no need for the nut to actually meet the body shoulder.

* Lubrication and chamfering of the pipe end will ease insertion of the pipe (use silicone lubricant).

Note

Before installation ensure that the end of the pipe to be inserted into the fitting is free of scratches and other imperfections and that both the pipe and the fitting itself are clean of sand, mud, stones etc.

Do not over tighten nut when closing. Never use wrenches or spanners with handle lengths longer than 46 cm - excessive torque during tightening can spread nut cone and result in pull outs.

If fittings are reused, ensure split ring is sharp and bites into pipe to avoid pull outs. Alternatively replace split ring.

We strongly recommend the use of PTFE tape in threaded connections.

Legend

UB	Units par bag
UC	Units per carton
W	Weight in grams

Technical Specifications

PLASSON Silver Line - These fittings have been specially designed for joining polyethylene pipes used with a working pressure up to 10 bar. They are designed and approved according to ISO 17885 (replaced ISO 14236) and are available in sizes 16 - 63mm.

Features

- Perfectly watertight
- Extremely simple to use
- Easy and fast to reuse
- Designed with a captive O-ring
- Frost proof
- Suitable for outdoor use in direct sunlight
- Highly impact resistant

Materials

Body: Polypropylene, high-grade copolymer

Nut: Polypropylene, high-grade copolymer

Split Ring: Polyacetal (POM)

Seal: Nitrile rubber (EPDM)

Operating Temperatures

The fittings are not to be used with hot water, although they withstand the same temperature as the polyethylene pipe itself. The fittings and valves will withstand sub-zero temperatures.

Threads

Threads marked "R", "Rp" and "Rc" are according to ISO 7-1. Threads marked "G" are according to ISO 228.

Especificaciones Técnicas

Installation Instructions Para accesorios de 16mm - 63mm

- Corte el tubo al tamaño requerido y realice el biselado al final del tubo
- Retire el racor hasta su última rosca dejándolo en el accesorio durante el próximo paso.
- Introduzca el tubo con un movimiento circular dentro del accesorio pasando el casquillo de apriete y el sello hasta llegar al tope interno del accesorio
- Gire firmemente el racor en dirección del cuerpo del accesorio, utilizando la llave PLASSON (o similar) en los tamaños 40mm y mayores.
- Cierre el racor firmemente, aunque no es necesario cerrarlo hasta el tope.

* A fin de facilitar la introducción es conveniente lubricar y biselar el tubo (con un lubricante que conforma las normas de aprobación de calidad del agua).

Nota

Antes de la instalación asegure que:

El extremo del tubo introducido no tenga imperfecciones o rayaduras. Tanto el tubo como el accesorio no tenga sobre los mismos arena, barro o piedras, etc. No cierre el racor con demasiada fuerza, nunca use llaves con manijas más largas de 46 cm.

Un excesivo momento de torsión durante el cierre puede dañar el cono del racor y como resultado del mismo no permitir su propio funcionamiento. Si los accesorios son usados nuevamente después de su desarmado, constate que los dientes del casquillo de apriete permanecen afilados y se hincan en el tubo impidiendo el escape del tubo. Si no es así, cambie el casquillo de apriete.

Recomendamos utilizar cinta de PTFE para sellar todas las conexiones roscadas.

Legend

UB	Unidades por bolsa
UC	Unidades por cartón
W	Peso en gramos

Especificaciones Técnicas

Los accesorios de la Línea Silver de **PLASSON** han sido diseñados para la unión de tuberías de polietileno de alta densidad usados con una presión de trabajo de hasta 10 bar. Están diseñados de acuerdo a las normas ISO y están disponibles en diámetros de 16 - 63mm.

Características

- Estanqueidad completa
- Fácil instalación
- Rápida reutilización
- Diseñada con una junta tórica cautiva
- Resistencia a bajas temperaturas
- Frost Proof
- Resistentes para instalación a la intemperie
- Alta resistencia a golpes o impactos

Materiales

Cuerpo: Polipropileno, block copolímero de alta calidad

Racor: Polipropileno, block copolímero de alta calidad

Casquillo de apriete: Polyacetal (POM)

Junta tórica: Nitrilo (EPDM)

Temperaturas de Trabajo

Los accesorios no son recomendados para usar con agua caliente, aunque soportan las mismas temperaturas que las propias tuberías de polietileno.

Sin embargo pueden resistir temperaturas inferiores a los cero grados centígrados.

Roscas

Roscas marcadas "R", "Rp" y "Rc" de conformidad con la normativa ISO 7-1.

Roscas "G" de conformidad con la normativa ISO 228.