



Fittings & Accessories for PE Pipes

July 2022 Price Catalogue
(July 2025 edition)

www.plasson.co.uk



Here at PLASSON we continually strive to develop and expand our range of fittings reflecting our ongoing strategy to deliver innovative solutions in the market.



PLASSON have one of the widest ranges of pipe fittings in the world with sizes ranging from 16mm to 1200mm, pressure ratings 0 bar to 25 bar, accepting nearly all existing pipe ranges, metric and imperial including polyethylene, lead, copper and galvanised. PLASSON have a 50 year in the ground track record for its products. We pride ourselves not only on the quality of our fittings but also on our high standard of service, delivery and aftersales support.



Uniquely placed in the UK market to supply a full range of fittings and accessories for water & gas pipe, our dedicated sales and technical team will work with you to provide the foremost solutions for joining supply pipes.



Contents



Mechanical 4-19

Compression.....	4-9
Universal.....	10-11
Barrier fittings	12-13
Adaptors.....	14-15
Imperial & Irish std. fittings	16-17
Mechanical saddles & tappers	18-19

Pushfit 20-21

Valves 22-27

Stop taps.....	22-24
Ball valves	24
QCV & EF valves.....	25
Check valves	26
Bib taps	27

Meter Connection & Manifolds 28-33

Water meter connection - below ground	28
MCP Single meter connection - above ground	29
MCP System - for multi occupancy	30-33

Other 34-39

Plassgas reusable.....	34
Repair clamps	35
Threaded	36-37
Tools & accessories.....	38-39

Electrofusion..... 40-49

Fittings	40-44
Specialist EF Saddles	45-49

Spigots..... 50-66

Long spigot fittings.....	50-58
Short spigot fittings	59-63
Seamless bends.....	64-66

Information 68-75

Fitting instructions.....	68-71
Technical details	72-73
Notes	74
Contact details	75

Mechanical



PLASSON mechanical fittings offer solutions for connecting PE pipes, used for conveying water and other fluids in urban and inter-urban infrastructure, industrial, mining, landscape, farming as well as optical fibre duct systems.

The fittings are designed to withstand working pressures of up to 16bar, and also include valves which allow the regulation of flow. These fittings are manufactured in diameters ranging from 16mm to 160mm.

7010 Coupler



160mm

Code	d	£ ea
PL070106016	16	5.14
PL070100020	20	6.40
PL070100025	25	6.84
PL070100032	32	16.09
PL070100040	40	34.12
PL070100050	50	35.54
PL070100063	63	51.92
PL870100075	75	88.19
PL870100090	90	101.71
PL870100110	110	177.30
PL070100125	125	381.79
PL0701061600A	160	426.17

7610 Repair Coupler



Code	d	£ ea
PL076100020	20	7.72
PL076100025	25	9.27
PL076100032	32	20.90
PL076100040	40	37.70
PL076100050	50	42.65
PL076100063	63	59.52
PL876100075	75	87.30
PL876100090	90	117.80
PL876100110	110	201.07
PL076100125	125	403.84

7110 Reducing Coupler



Code	d	£ ea
PL071100020016	20 x 16	11.70
PL071100025016	25 x 16	12.85
PL071100025020	25 x 20	12.85
PL071100032020	32 x 20	21.75
PL071100032025	32 x 25	21.75
PL071100040025	40 x 25	36.85
PL071100040032	40 x 32	36.85
PL071100050025	50 x 25	43.18
PL071100050032	50 x 32	49.34
PL071100050040	50 x 40	49.34
PL071100063025	63 x 25	52.70
PL071100063032	63 x 32	62.45
PL071100063040	63 x 40	62.45
PL071100063050	63 x 50	62.45
PL871100075050	75 x 50	82.03
PL871100075063	75 x 63	82.03
PL871100090063	90 x 63	108.99
PL871100090075	90 x 75	108.99
PL871100110090	110 x 90	187.46

7120 End Plug



Code	d	£ ea
PL071200020	20	7.87
PL071200025	25	10.12
PL071200032	32	14.70
PL071200040	40	22.91
PL071200050	50	30.56
PL071200063	63	51.22
PL871200075	75	66.45
PL871200090	90	90.23
PL871200110	110	107.44

7129 Plug Adaptor



Code	d	£ ea
PL071209020	20	3.18
PL071209025	25	3.47
PL071209032	32	3.64
PL071209040	40	4.48
PL071209050	50	7.23
PL071209063	63	7.87

7020 Male Adaptor

Metric x MI BSP



Code	d	£ ea
PL0702060160030A	16 x 3/8"	4.25
PL070206016005	16 x 1/2"	4.25
PL070206016007	16 x 3/4"	4.25
PL070200020005	20 x 1/2"	5.97
PL070200020007	20 x 3/4"	6.39
PL070200020010	20 x 1"	8.92
PL070200025005	25 x 1/2"	7.17
PL070200025007	25 x 3/4"	7.17
PL070200025010	25 x 1"	11.09
PL070200032007	32 x 3/4"	11.09
PL070200032010	32 x 1"	11.09
PL070200032013	32 x 1 1/4"	11.09
PL070200032015	32 x 1 1/2"	11.09
PL070200040010	40 x 1"	21.26
PL070200040013	40 x 1 1/4"	21.26
PL070200040015	40 x 1 1/2"	21.26
PL070200040020	40 x 2"	21.26
PL070200050010	50 x 1"	27.16
PL070200050013	50 x 1 1/4"	27.16
PL070200050015	50 x 1 1/2"	27.16
PL070200050020	50 x 2"	27.16
PL070200063013	63 x 1 1/4"	36.38
PL070200063015	63 x 1 1/2"	36.38
PL070200063020	63 x 2"	36.38
PL070200063025	63 x 2 1/2"	36.38
PL870200075020	75 x 2"	55.19
PL870200075025	75 x 2 1/2"	55.19
PL870200075030	75 x 3"	55.19
PL870200090020	90 x 2"	74.77
PL870200090025	90 x 2 1/2"	74.77
PL870200090030	90 x 3"	74.77
PL870200090040	90 x 4"	74.77
PL870200110020	110 x 2"	126.69
PL870200110030	110 x 3"	126.69
PL870200110040	110 x 4"	126.69

7030 Female Adaptor

Metric x FI BSP



Code	d	£ ea
PL070306016005	16 x 1/2"	5.12
PL070306016007	16 x 3/4"	5.12
PL070300020005	20 x 1/2"	7.17
PL070300020007	20 x 3/4"	7.17
PL070300020010	20 x 1"	7.17
PL070300025007	25 x 3/4"	7.84
PL070300025010	25 x 1"	7.84
PL070300032007	32 x 3/4"	10.56
PL070300032010	32 x 1"	10.56
PL070300032013	32 x 1 1/4"	10.56
PL070300040010	40 x 1"	24.51
PL070300040013	40 x 1 1/4"	24.51
PL070300040015	40 x 1 1/2"	24.51
PL070300050013	50 x 1 1/4"	33.40
PL070300050015	50 x 1 1/2"	33.40
PL070300050020	50 x 2"	33.40
PL070300063020	63 x 2"	41.98
PL870300075020	75 x 2"	56.40
PL870300075025	75 x 2 1/2"	56.40
PL870300090020	90 x 2"	77.17
PL870300090030	90 x 3"	77.17
PL870300090040	90 x 4"	77.17
PL870300110030	110 x 3"	162.04
PL870300110040	110 x 4"	162.04

7060 Female Adaptor

Parallel Thread



Code	d	£ ea
PL0703G0025007	25 x 3/4"	10.58
PL0703G0025010	25 x 1"	10.58
PL0703G0032010	32 x 1"	14.10



Pushfit

Valves

MCP

Other

Electrofusion

Spigots

Information

7040 90° Tee



Code	d	£ ea
PL070406016	16	8.95
PL070400020	20	11.22
PL070400025	25	17.55
PL070400032	32	23.60
PL070400040	40	45.77
PL070400050	50	50.84
PL070400063	63	76.10
PL870400075	75	136.69
PL870400090	90	192.96
PL870400110	110	392.02
PL0704061600A	160	715.68

7045 90° Repair Tee



Code	d	£ ea
PL0704P0020	20	14.22
PL0704P0025	25	20.01
PL0704P0032	32	27.28
PL0704P0040	40	55.96
PL0704P0050	50	62.67
PL0704P0063	63	88.65

7340 90° Reducing Tee



Code	d	£ ea
PL073400020016	20 x 16 x 20	14.64
PL073400025020	25 x 20 x 25	21.31
PL073400032025	32 x 25 x 32	31.14
PL073400040025	40 x 25 x 40	48.79
PL073400040032	40 x 32 x 40	51.22
PL073400050025	50 x 25 x 50	74.35
PL073400050032	50 x 32 x 50	74.35
PL073400050040	50 x 40 x 50	74.35
PL073400063032	63 x 32 x 63	89.65
PL073400063040	63 x 40 x 63	89.65
PL073400063050	63 x 50 x 63	89.65

7740 90° Enlarging Tee



Code	d	£ ea
PL077400025032	25 x 32 x 25	34.72

7140 90° Slip Tee

Female Offtake



Code	d	£ ea
PL0714P0050015	50 x 1 1/2" x 50	57.63
PL0714P0063013	63 x 1 1/4" x 63	76.89



7840 90° Tee

Male Offtake



Code	d	£ ea
PL078400020005	20 x 1/2" x 20	9.70
PL078400020007	20 x 3/4" x 20	9.70
PL078400025005	25 x 1/2" x 25	15.74
PL078400025007	25 x 3/4" x 25	15.74
PL078400032010	32 x 1" x 32	22.34
PL078400040013	40 x 1 1/4" x 40	33.01
PL078400040015	40 x 1 1/2" x 40	33.01
PL078400050013	50 x 1 1/4" x 50	46.65
PL078400050015	50 x 1 1/2" x 50	46.65
PL078400063013	63 x 1 1/4" x 63	63.16
PL078400063015	63 x 1 1/2" x 63	63.16
PL078400063020	63 x 2" x 63	63.16

7140 90° Tee

Female Offtake



Code	d	£ ea
PL071400020005	20 x 1/2" x 20	10.32
PL071450020016	20 x 3/4" x 16	10.32
PL071400020007	20 x 3/4" x 20	10.32
PL071400025005	25 x 1/2" x 25	17.02
PL071450025020	25 x 3/4" x 20	17.02
PL071400025007	25 x 3/4" x 25	17.02
PL071400025010	25 x 1" x 25	17.02
PL071400025013	25 x 1 1/4" x 25	17.02
PL071400032007	32 x 3/4" x 32	22.34
PL071450032025	32 x 1" x 25	22.34
PL071400032010	32 x 1" x 32	22.34
PL071400032013	32 x 1 1/4" x 32	22.34
PL071400032015	32 x 1 1/2" x 32	22.34
PL071400040010	40 x 1" x 40	36.22
PL071400040013	40 x 1 1/4" x 40	39.16
PL071400040015	40 x 1 1/2" x 40	39.16
PL071400040020	40 x 2" x 40	39.16
PL071400050015	50 x 1 1/2" x 50	47.25
PL071400050020	50 x 2" x 50	47.25
PL071400063013	63 x 1 1/4" x 63	66.29
PL071400063015	63 x 1 1/2" x 63	66.29
PL071400063020	63 x 2" x 63	66.29
PL871400075020	75 x 2" x 75	124.60
PL871400075025	75 x 2 1/2" x 75	124.60
PL871400075030	75 x 3" x 75	124.60
PL871400090030	90 x 3" x 90	148.75
PL871400110040	110 x 4" x 110	270.84

7050 90° Elbow



Code	d	£ ea
PL070506016	16	5.74
PL070500020	20	7.92
PL070500025	25	11.67
PL070500032	32	19.16
PL070500040	40	38.01
PL070500050	50	40.62
PL070500063	63	53.90
PL870500075	75	153.56
PL870500090	90	196.20
PL870500110	110	321.65
PL0705061600A	160	508.68

7510 90° Reducing Elbow



Code	d	£ ea
PL075100025020	25 x 20	13.46

7460 45° Elbow



Code	d	£ ea
PL070600032	32	22.46
PL070600040	40	38.01
PL070600050	50	40.62
PL070600063	63	53.90
PL870600090	90	234.07
PL870600110	110	359.84

7750 Wall Plate Elbow PP



Code	d	£ ea
PL077500020005	20 x 1/2"	16.03
PL077500025007	25 x 3/4"	21.37

9055 Wall Plate Elbow DZR



Code	d	£ ea
PV9055005	20 x 1/2"	34.83
PV9055007	25 x 3/4"	43.69

7450 45° Elbow

Male Offtake



Code	d	£ ea
PL074500020005	20 x 1/2"	5.29
PL074500020007	20 x 3/4"	5.29

7150 90° Elbow

Female Offtake



Code	d	£ ea
PL071506016005	16 x 1/2"	5.95
PL071500020005	20 x 1/2"	7.85
PL071500020007	20 x 3/4"	7.85
PL071500025005	25 x 1/2"	10.32
PL071500025007	25 x 3/4"	10.32
PL071500025010	25 x 1"	10.32
PL071500032007	32 x 3/4"	16.63
PL071500032010	32 x 1"	16.63
PL071500032013	32 x 1 1/4"	16.63
PL071500040010	40 x 1"	33.48
PL071500040013	40 x 1 1/4"	33.48
PL071500040015	40 x 1 1/2"	33.48
PL071500040020	40 x 2"	33.48
PL071500050010	50 x 1"	37.48
PL071500050013	50 x 1 1/4"	37.48
PL071500050015	50 x 1 1/2"	37.48
PL071500050020	50 x 2"	37.48
PL071500063013	63 x 1 1/4"	47.04
PL071500063015	63 x 1 1/2"	47.04
PL071500063020	63 x 2"	47.04
PL871500075020	75 x 2"	89.68

7850 90° Elbow

Male Offtake



Code	d	£ ea
PL078500020005	20 x 1/2"	5.75
PL078500020007	20 x 3/4"	5.75
PL078500025005	25 x 1/2"	6.72
PL078500025007	25 x 3/4"	6.72
PL078500025010	25 x 1"	6.72
PL078500032010	32 x 1"	11.34
PL078500040010	40 x 1"	19.28
PL078500040013	40 x 1 1/4"	19.28
PL078500040015	40 x 1 1/2"	19.28
PL078500050010	50 x 1"	26.51
PL078500050013	50 x 1 1/4"	26.51
PL078500050015	50 x 1 1/2"	26.51
PL078500063013	63 x 1 1/4"	32.56
PL078500063015	63 x 1 1/2"	32.56
PL078500063020	63 x 2"	32.56
PL878500090030	90 x 3"	94.47
PL878500110040	110 x 4"	121.32

Modular & threaded adaptors and modular tee

7250 Threaded Adaptor

Convert std fitting to MI BSP



Code	d	£ ea
PL072500025005	25 x 1/2"	10.40
PL072500025007	25 x 3/4"	10.40
PL072500032005	32 x 1/2"	11.09
PL072500032007	32 x 3/4"	11.09
PL072500032010	32 x 1"	11.09
PL072500040015	40 x 1 1/2"	13.55
PL072500050010	50 x 1"	19.70
PL072500050013	50 x 1 1/4"	19.70
PL072500050015	50 x 1 1/2"	19.70
PL072500050020	50 x 2"	19.70
PL072500063010	63 x 1"	28.63
PL072500063015	63 x 1 1/2"	28.63
PL072500063020	63 x 2"	28.63



7940 Modular Adaptor

For close/tight assemblies



Code	d	£ ea
PL079400020	20	8.75
PL079400025	25	9.58
PL079400032	32	17.34
PL079400040	40	24.52
PL079400050	50	38.60
PL079400063	63	56.09



7956 Modular Tee

Male Offtake for building manifolds



Code	d	£ ea
PL0784L0032010	32 x 1" x 32	63.99
PL0784L0040013	40 x 1 1/4" x 40	85.60
PL0784L0040015	40 x 1 1/2" x 40	85.60
PL0784L0050013	50 x 1 1/4" x 50	119.96
PL0784L0050015	50 x 1 1/2" x 50	119.96
PL0784L0050020	50 x 2" x 50	119.96
PL0784L0063013	63 x 1 1/4" x 63	167.43



7810 Coupler with Riser



Code	d	£ ea
PL078100050007	50 x 3/4" x 50	34.61
PL078100050010	50 x 1" x 50	34.61
PL078100063010	63 x 1" x 63	56.28
PL878100075007	75 x 3/4" x 75	78.82

7640 45° Tee



Code	d	£ ea
PL076400063	63	88.65
PL876400090	90	285.08
PL876400110	110	452.99

7550 Y-Fitting



Code	d	£ ea
PL075500020007	20 x 20 x 3/4"	11.45
PL075500025007	25 x 25 x 3/4"	17.13

7350 90° Spigot Elbow



Code	d	£ ea
PL073500050040	50 x 40	31.30
PL073500050050	50 x 50	30.11
PL073500063050	63 x 50	38.63

7540 Cross Threaded

Female Offtake



Code	d	£ ea
PL075400020007	20 x 3/4"	17.13

7220 Mechanical Flange Adaptor



Code	d	£ ea
PL072200050015	50 x 1 1/2"	68.18
PL072200050020	50 x 2"	68.18
PL072200063020	63 x 2"	105.38
PL872200075025	75 x 2 1/2"	122.95
PL872200090030	90 x 3"	144.72
PL872200090040	90 x 4"	144.72
PL872200110040	110 x 4"	180.93
PL072200125050	125 x 5"	277.44
PL072200125060	125 x 6"	277.44
PL0722061600500A	160 x 5"	374.75
PL0722061600600A	160 x 6"	374.75

7236 Spigot Flange Adaptor



Code	d	£ ea
PL0723060500150A	50 x 1 1/2"	53.90
PL0723060500200A	50 x 2"	53.90
PL0723060630200A	63 x 2"	63.94
PL0723060630250A	63 x 2 1/2"	63.94
PL872306075020	75 x 2"	76.02
PL872306075025	75 x 2 1/2"	76.02
PL872306075030	75 x 3"	76.02
PL872306090025	90 x 2 1/2"	96.48
PL872306090030	90 x 3"	96.48
PL872306090040	90 x 4"	96.48
PL872306110030	110 x 3"	144.72
PL872306110040	110 x 4"	144.72
PL872306110050	110 x 5"	163.21
PL0723061600500A	160 x 5"	269.42
PL0723061600600A	160 x 6"	269.42

7228 EPDM Flange Gasket



Code	d	£ ea
PL07228050015	50 x 1 1/2"	2.50
PL07228063020	63 x 2"	3.48
PL07228075025	75 x 2 1/2"	4.55
PL07228090030	90 x 3"	5.49
PL07228110040	110 x 4"	7.07
PL07228140050	140 x 5"	8.02
PL07228160060	160/180 x 6"	10.84
PL07228200080	200/225 x 8"	40.51
PL07228250100	250/280 x 10"	42.20
PL07228315120	315 x 12"	52.94

Universal Couplers



Universal x Universal

Connect or repair multiple pipe types with one fitting. Can repair large holes and bridge gaps. For connecting or repairing metric and imperial PE, steel, copper, lead, PEX, PB, PVC-U, ABS & PP-R between 19mm and 64mm.


1761 Universal Slip Coupler

Universal x Universal

**SLIDE
N' SEAL**



Code	d	£ ea
PL176100014018	14-18 x 14-18	44.36
PL176100019022	19-22 x 19-22	50.70
PL176100024028	24-28 x 24-28	57.55
PL176100031035	31-35 x 31-35	70.25
PL176100040043	40-43 x 40-43	86.38
PL176100048051	48-51 x 48-51	104.62
PL176100060064	60-64 x 60-64	135.72

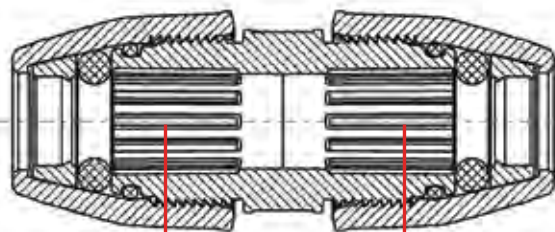

Maximum repair length gap (Mrl)

d (popular pipes)	Mrl	L
14-18 (15mm, 3/8")	80mm	180
19-22 (20mm, 1/2")	80mm	180
24-28 (25mm, 3/4")	90mm	200
31-35 (32mm, 1")	100mm	210
40-43 (40mm, 1 1/4")	110mm	250
48-51 (50mm, 1 1/2")	120mm	270
60-64 (63mm, 2")	130mm	310



PE x Universal

The PLASSON 10017 Universal Coupler and the Plass4 77017 Coupler/77057 Plass4 Elbow connects metric PE to other pipe materials such as imperial polyethylene, copper, lead, PVC, poly-york and galvanised iron pipes.

10017 Universal Coupler

PE x Universal



Code	d	£ ea
PP10017U025018	25 x 14-18	23.49
PP10017U025022	25 x 19-22	23.49
PP10017U025028	25 x 24-28	23.49
PP10017U025035	25 x 31-35	32.19



PLASS4

77017 Plass4 Coupler

PE x Universal



Code	d	£ ea
PL07017U025022	25 x 15-22	23.51
PL07017U025027	25 x 20-27	25.14
PL07017U025035	25 x 27-35	33.15
PL07017U032027	32 x 20-27	33.15
PL07017U032035	32 x 27-35	38.84
PL07017U050050	50 x 35-50	71.75

77057 Plass4 Elbow

PE x Universal



Code	d	£ ea
PL07057U025022	25 x 15-22	24.16
PL07057U025027	25 x 20-27	26.24
PL07057U025035	25 x 27-35	42.19

Copper/PB/PEX x Universal

The PLASSON 10017C allows pushfit connection of 22mm copper, PEX or PB with the universal end fitting all pipes between 14mm and 28mm.

10017C Universal Coupler

22mm Cu/PB/PEX x Universal



Code	d	£ ea
PP10017C022018	22 x 14-18	28.01
PP10017C022022	22 x 19-22	28.01
PP10017C022028	22 x 24-28	28.01

PE x Copper/PB/PEX

1001C Coupler

PE to Cu/PB/PEX



Code	d	£ ea
PP1001CU020015	20 x 15	12.23
PP1001CU025015	25 x 15	12.74
PP1001CU025022	25 x 22	13.06
PP1001CU032028	32 x 28	24.43

Copper/PB/PEX x Threaded

1002C Male Adaptor

Cu/ PB/PEX



Code	d	£ ea
PP1002CU7015007	15 x 3/4"	10.64
PP1002CU7022007	22 x 3/4"	11.19
PP1002CU7028010	28 x 1"	17.93

1003C Female Adaptor

Cu/ PB/PEX



Code	d	£ ea
PP1003CU7015007	15 x 3/4"	14.15
PP1003CU7022007	22 x 3/4"	14.67

When using PB/ PEX pipes, use pipe manufacturers liner.

Imperial x Metric

7418 Coupler

Metric to Imperial



Code	d	£ ea
PL0701M0020005	1/2" x 20	6.97
PL0701M0020003	3/8" x 20	10.38
PL0711M0025005	1/2" x 25	8.03
PL0711M0025003	3/8" x 25	13.85
PL0701M0025007	3/4" x 25	7.96
PL0701M0032010	1" x 32	17.02
PL0711M0032013	1 1/4" x 32	34.88
PL0711M0050013	1 1/4" x 50	44.85
PL0701M0050015	1 1/2" x 50	44.85
PL0711M0063015	1 1/2" x 63	57.16
PL0701M0063020	2" x 63	62.74

7478 90° Elbow

Metric to Imperial



Code	d	£ ea
PL0705M0020005	1/2" x 20	9.38
PL0751M0025005	1/2" x 25	16.07
PL0705M0025007	3/4" x 25	13.53
PL0705M0032010	1" x 32	22.52

1001M Coupler

Metric to Imperial
pushfit



Code	d	£ ea
PP1001M6020005	20 x 1/2"	8.54
PP1001M6025005	25 x 1/2"	8.98
PP1001M6025007	25 x 3/4"	9.58
PP1001M6032010	32 x 1"	19.50



PLASSON[®] Barrier



The UK's only range of fittings with approval on multiple manufacturers barrier pipes, 25, 32 and 63mm.

Barrier pipe is a reinforced PE pipe used to protect water supplies where laid in what is commonly known as contaminated ground. It is easily identified by the brown stripe on the blue pipe. Although barrier pipe is defined as 25, 32 and 63mm, the OD of the pipe is actually larger, for example, 25mm barrier pipe OD may be between 26.2mm and 27.8mm.

Nom size (mm)	Mean OD (mm)	
	Min	Max
25	26.2	27.78
32	33.3	34.78
63	64.3	67.75

The PLASSON Barrier fitting has been specifically designed to accommodate all sizes between the tolerances stated in BS8588, the British Standard for water pipes in contaminated ground.

Ensuring no contact between the protective aluminium layer in the barrier pipe and the drinking water, you can have confidence that the PLASSON Barrier fitting will provide a completely secure method to maintain the full system protection barrier pipe installations require.

PLASSON Barrier Fittings have UK Water Reg4 approval, conform to BS6920 and independent test certification for permeation testing in accordance with BS8588 on all the leading brands of barrier pipe.

- GPS - Protectaline
- egeplast - SLA
- Radius - Puriton
- Polypipe - Polyguard



Male Adaptor Barrier



Code	size (mm)	£ ea
PB270200025007	25 x 3/4"	6.95
PB270200032007	32 x 3/4"	9.65
PB270200032010	32 x 1"	10.27
PB270200063015	63 x 1 1/2"	31.45
PB270200063020	63 x 2"	31.45

Female Adaptor Barrier



Code	size (mm)	£ ea
PB270300025007	25 x 3/4"	8.30
PB270300025010	25 x 1"	8.30
PB270300032007	32 x 3/4"	11.20
PB270300032010	32 x 1"	11.20
PB270300063015	63 x 1 1/2"	38.19
PB270300063020	63 x 2"	38.19

Coupler Barrier



Code	size (mm)	£ ea
PB270100025	25 x 25	10.17
PB270100032	32 x 32	14.41
PB270100063	63 x 63	49.16

Coupler Barrier x Metric PE



Code	size (mm)	£ ea
PB2701S0025	25 x 25	7.71
PB2701S0032	32 x 32	14.01
PB2701S0063	63 x 63	43.84

Coupler Barrier x Copper



Code	size (mm)	£ ea
PB2701C0025022	25 x 22	16.16
PB2701C0032028	32 x 28	21.10
PB2701C0063054	63 x 54	56.94

Reducing Coupler Barrier



Code	size (mm)	£ ea
PB271100032025	32 x 25	17.06
PB271100063025	63 x 25	52.37
PB271100063032	63 x 32	52.37

90° Elbow Barrier



Code	size (mm)	£ ea
PB270500025	25 x 25	8.75
PB270500032	32 x 32	16.02
PB270500063	63 x 63	50.19

45° Elbow Barrier



Code	size (mm)	£ ea
PB270600063	63 x 63	50.95

90° Elbow Female Adaptor Barrier



Code	size (mm)	£ ea
PB271500025007	25 x 3/4"	10.05
PB271500032010	32 x 1"	15.26
PB271500063020	63 x 2"	48.24



End Plug Barrier



Code	size (mm)	£ ea
PB271200025	25	6.74
PB271200032	32	10.43
PB271200063	63	31.78

90° Tee Barrier



Code	size (mm)	£ ea
PB270400025	25 x 25 x 25	17.33
PB270400032	32 x 32 x 32	21.30
PB270400063	63 x 63 x 63	74.50

Reducing Tee Barrier



Code	size (mm)	£ ea
PB273400032025	32 x 25 x 32	27.76
PB273400063032	63 x 32 x 63	85.99

Adaptor Kit Barrier



Code	size (mm)	£ ea
PB277800025	25	3.10
PB277800032	32	3.26
PB277800063	63	10.16

The adaptor kit converts any standard PLASSON metric fitting to accept barrier pipe. Simply discard the original grey nut and white grip ring, replace with the brown nut, barbed adaptor and the grip ring from the kit, assemble as shown in the instructions below.

For PLASSON Barrier Fitting Instructions please see page 68.

Connecting to Copper pipe (above & below ground)

7438 Copper Adaptor

Table X & Y



Code	d	£ ea
PL07438015	20 x 15	6.30
PL07438016	25 x 15	8.14
PL07438022	25 x 22	7.72
PL07438028	32 x 28	11.55
PL07438035	40 x 35	14.22
PL07438042	50 x 42	19.46
PL07438054	63 x 54	21.75

Connecting to Lead

7782 Lead Adaptor



Code	Nearest Equivalent Imperial Size (IN x LB/YD)	Fitting Size	Bore (mm)	Wall Thickness (mm)	£ ea
PL077802025003	3/8" x 5lb	25	10	5.0	3.54
PL077802025005	1/2" x 7lb	25	12	5.6	2.92
PL077802032005	1/2" x 9lb	32	12	6.7	4.21
PL077802032007	3/4" x 9lb	32	20	5.3	3.55
PL077802040007	3/4" x 11lb	40	20	6.4	6.92
PL077802050010	1" x 16lb	50	25	8.0	8.55

Connecting to Galv

7896 Universal Adaptor

For Galvanised & PVC

No end load restraint. Anchoring of pipe and fitting required.



Code	d	£ ea
PL07896015P	20 x 15	4.25
PL07896022P	25 x 22 / 1/2"	5.01
PL07896028P	32 x 28 / 3/4"	5.50
PL07896035P	40 x 35 / 1"	18.34
PL07896042P	50 x 42 / 1 1/4"	19.86

Connecting to Steel

7898 Adaptor

For Steel Pipe

No end load restraint. Anchoring of pipe and fitting required.



Code	d	£ ea
PL0789808015	50 x 1 1/2"	29.43
PL0789808020	63 x 2"	32.42

7970 Metric PVC Adaptor



Code	d	£ ea
PL07970020P	20	2.89
PL07970025P	25	3.21
PL07970032P	32	3.54
PL07970040P	40	4.51
PL07970050P	50	6.79
PL07970063P	63	7.73

7930 Reducing Set



Code	d	£ ea
PL079300025020	25 x 20	4.61
PL079300032020	32 x 20	6.72
PL079300032025	32 x 25	6.72
PL079300040032	40 x 32	9.38
PL079300050025	50 x 25	13.72
PL079300050032	50 x 32	13.32
PL079300050040	50 x 40	14.26
PL079300063025	63 x 25	19.94
PL079300063032	63 x 32	19.94
PL079300063050	63 x 50	19.94
PL879300075063	75 x 63	49.76
PL079300110063	110 x 63	80.78
PL879300110075	110 x 75	76.35
PL879300110090	110 x 90	64.58

7785 Damaged Metric Pipe Adaptor



Code	d	£ ea
PL077805020	20	1.21
PL077805025	25	1.49
PL077805032	32	1.77
PL07005S063P	63	2.31

7950 Pipe Liner



Code	d	£ ea
PL079500020	20	0.54
PL079500025	25	0.55
PL079500032	32	0.91
PL079500040	40	1.57
PL079500050	50	1.76
PL079500063	63	2.10

Adaptors to convert Metric Fittings to Imperial pipe

7786 Class C Low Density

BS1972/67



Code	Nominal Size	Fitting Size	£ ea
PL077806003	3/8"	20	1.88
PL077806005	1/2"	20	1.57
PL077806007	3/4"	25	1.88
PL077806010	1"	32	2.19
PL077806013	1 1/4"	50	5.35
PL077806015	1 1/2"	50	5.35
PL077806020	2"	63	8.02

7787 Class D Low Density

BS1972/67



Code	Nominal Size	Fitting Size	£ ea
PL077807005	1/2"	20	1.57
PL077807007	3/4"	25	1.88
PL077807010	1"	32	2.19
PL077807013	1 1/4"	50	5.35
PL077807015	1 1/2"	50	5.35

7788 Class C High Density

BS3284/67



Code	Nominal Size	Fitting Size	£ ea
PL077808005	1/2"	20	1.57
PL077808007	3/4"	25	1.88
PL077808010	1"	32	2.19
PL077808013	1 1/4"	50	5.35
PL077808015	1 1/2"	50	5.35
PL077808020	2"	63	8.02

7789 Class D High Density

BS3284/67



Code	Nominal Size	Fitting Size	£ ea
PL077809003	3/8"	20	1.88
PL077809005	1/2"	20	1.57
PL077809007	3/4"	25	1.88
PL077809010	1"	32	2.19
PL077809013	1 1/4"	50	5.35
PL077809015	1 1/2"	50	5.35
PL077809020	2"	63	8.02

7995 Normal Gauge

IS 134:1977



Code	Nominal Size	Fitting Size	£ ea
PL079905005	1/2"	20	1.19
PL079905007	3/4"	25	1.43
PL079905010	1"	32	1.68
PL079905013	1 1/4"	50	3.88
PL079905015	1 1/2"	50	4.92
PL079905020	2"	63	7.70

7996 Heavy Gauge

IS 134:1977



Code	Nominal Size	Fitting Size	£ ea
PL079906005	1/2"	20	1.19
PL079906007	3/4"	25	1.43
PL079906010	1"	32	1.68
PL079906013	1 1/4"	50	3.88
PL079906015	1 1/2"	50	4.92

For fitting instructions see page 67.

Pipe Sizes of Imperial Polyethylene (Alkathene)



Class	OD (mm)	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Class C Low Density	Min Max OD	17.00 - 17.30	21.20 - 21.50	26.60 - 26.90	33.40 - 33.70	42.10 - 42.50	48.10 - 48.50	60.10 - 60.60
	Wall Thickness	2.20 - 2.50	2.70 - 3.00	3.40 - 3.70	4.20 - 4.60	5.30 - 5.80	6.10 - 6.70	7.60 - 8.40
Class D Low Density	Min Max OD		21.20 - 21.50	26.60 - 26.90	33.40 - 33.70	42.10 - 42.50	48.10 - 48.50	
	Wall Thickness		3.40 - 3.70	4.30 - 4.70	5.40 - 5.90	6.80 - 7.50	7.80 - 8.60	
Class C High Density	Min Max OD		21.20 - 21.50	26.60 - 26.90	33.40 - 33.70	42.10 - 42.50	48.10 - 48.50	60.10 - 60.60
	Wall Thickness		1.80 - 2.00	2.30 - 2.60	2.80 - 3.10	3.60 - 4.00	4.10 - 4.50	5.10 - 5.60
Class D High Density	Min Max OD	17.00 - 17.30	21.20 - 21.50	26.60 - 26.90	33.40 - 33.70	42.10 - 42.50	48.10 - 48.50	60.10 - 60.60
	Wall Thickness	1.90 - 2.10	2.30 - 2.60	2.90 - 3.20	3.70 - 4.10	4.60 - 5.10	5.30 - 5.80	6.60 - 7.30
Normal Gauge	Min Max OD		16.95 - 17.30	24.95 - 25.40	31.25 - 31.75	37.50 - 38.10	43.80 - 44.45	60.00 - 60.85
	Wall Thickness		2.30 - 2.60	3.10 - 3.50	3.10 - 3.50	3.10 - 3.50	3.50 - 3.90	4.56 - 5.20
Heavy Gauge	Min Max OD		20.70 - 21.10	27.05 - 27.45	33.85 - 34.10	42.00 - 42.65	47.95 - 48.65	
	Wall Thickness		4.30 - 4.85	4.30 - 4.85	4.30 - 4.85	5.05 - 5.60	5.35 - 5.90	

Imperial x Imperial

Fittings for Imperial Polyethylene pipes to BS1972 and 3284, Classes C and D, no liners are required for these Imperial PE joints.

7404 Coupler

Imperial



Code	d	£ ea
PL0701M0005	1/2" x 1/2"	7.38
PL0701M0007	3/4" x 3/4"	7.87
PL0701M0010	1" x 1"	18.49
PL0701M0015	1 1/2" x 1 1/2"	40.85
PL0701M0020	2" x 2"	59.71

7388 Female Adaptor

Imperial



Code	d	£ ea
PL0703M0005005	1/2" x 1/2"	8.25
PL0703M0007007	3/4" x 3/4"	9.03
PL0703M0010010	1" x 1"	12.13
PL0703M0015015	1 1/2" x 1 1/2"	38.39
PL0703M0020020	2" x 2"	48.31

7428 Male Adaptor

Imperial



Code	d	£ ea
PL0702M0005005	1/2" x 1/2"	6.88
PL0702M0007007	3/4" x 3/4"	8.25
PL0702M0010010	1" x 1"	12.77
PL0702M0015015	1 1/2" x 1 1/2"	31.21
PL0702M0020020	2" x 2"	41.82

Irish Standard (IS134) Normal Gauge (red grip ring) Heavy Gauge (blue grip ring)

7518 Coupler Normal x Metric



Code	d	£ ea
PL0711N0025005	1/2" x 25	9.70

7578 90° Elbow Normal x Metric



Code	d	£ ea
PL0705N0020005	1/2" x 20	7.70
PL0705N0025005	1/2" x 25	14.07

7618 Coupler Heavy x Metric



Code	d	£ ea
PL0701H0020005	1/2" x 20	6.36
PL0711H0025005	1/2" x 25	9.70
PL0701H0025007	3/4" x 25	7.34

7678 90° Elbow Heavy x Metric



Code	d	£ ea
PL0751H0025005	1/2" x 25	14.07

7508 Coupler Normal x Heavy



Code	d	£ ea
PL0701Y0005005	1/2" x 1/2"	7.55

Irish Copper Adaptor

For connection to Irish copper, use the 7438 adaptor in a metric PLASSON mechanical fitting.

7438 Copper Adaptor

table X & Y



Code	d	£ ea
PL07438014	25 x 1/2" IRS	8.14
PL07438021	25 x 3/4" IRS	7.72
PL07438028	32 x 1" IRS	11.55

Irish Standard (IS134)

Heavy Gauge (blue grip ring)

7601 Coupler



Code HG	d	£ ea
PL0701H0005	1/2"	7.55
PL0701H0007	3/4"	8.50
PL0701H0010	1"	16.69

7628 Male Adaptor



Code HG	d	£ ea
PL0702H0005005	1/2" x 1/2" MI	5.94

7604 90° Tee



Code HG	d	£ ea
PL0704H0005	1/2" x 1/2" x 1/2"	12.09
PL0704H0007	3/4" x 3/4" x 3/4"	17.02

7605 90° Elbow



Code HG	d	£ ea
PL0705H0005	1/2" x 1/2"	9.32
PL0705H0007	3/4" x 3/4"	12.34

7679 90° Female Elbow



Code HG	d	£ ea
PL0715H0005005	1/2" x 1/2"	7.82

7606 Wall Plate Elbow



Code HG	d	£ ea
PL0775H0005005	1/2" x 1/2"	14.17

7609 Stop Tap



Code HG	d	£ ea
PL0340H0005	1/2" x 1/2"	35.87
PL0340H0007	3/4" x 3/4"	42.81

Normal Gauge (red grip ring)

7501 Coupler



Code NG	d	£ ea
PL0701N0005	1/2"	7.55
PL0701N0007	3/4"	8.50
PL0701N0010	1"	16.69

7504 Tee



Code NG	d	£ ea
PL0704N0005	1/2" x 1/2" x 1/2"	12.09
PL0704N0007	3/4" x 3/4" x 3/4"	17.02

7505 90° Elbow



Code NG	d	£ ea
PL0705N0005	1/2" x 1/2"	9.32
PL0705N0007	3/4" x 3/4"	12.34

7579 Female Elbow



Code NG	d	£ ea
PL0715N0005005	1/2" x 1/2"	7.82

7506 Wall Plate Elbow



Code NG	d	£ ea
PL0775N0005005	1/2" x 1/2"	14.17

7509 Stop Tap



Code NG	d	£ ea
PL0340N0005	1/2" x 1/2"	35.87
PL0340N0007	3/4" x 3/4"	42.81

PlasSaddle



PLASSON's Revolutionary Mechanical Saddle

PLASSON is proud to introduce its newly designed mechanical saddle, featuring fast, bolt free installation as well as some of our well-established mechanical fitting features:

- Fast and Innovative tightening mechanism
- No bolts
- Non-corrosive, strong and durable plastic parts
- Integral seals - no need for thread sealants

Technical specifications

- Suitable for use on PE and PVC pipelines between 63 and 180mm
- PN 16 pressure rating
- Female "Rp", Male "R" ISO 7-1 threads
- Raw materials: PP + GF clamps, PPB body, EPDM seals, Brass Cutter



16310 PlasSaddle Tapper



Code	d	£ ea
PL163100063025	63 x 25	103.84
PL163100063032	63 x 32	103.84
PL163100090025	90 x 25	118.25
PL163100090032	90 x 32	118.25
PL163100110025	110 x 25	133.10
PL163100110032	110 x 32	133.10
PL163100125025	125 x 25	148.50
PL163100125032	125 x 32	148.50
PL163100160025	160 x 25	165.00
PL163100160032	160 x 32	165.00
PL163100180025	180 x 25	198.00
PL163100180032	180 x 32	198.00



1631R PlasSaddle Tapper Male

BSPT Outlet



Code	d	£ ea
PL1631R0063010	63 x 1"	101.20
PL1631R0090010	90 x 1"	116.05
PL1631R0110010	110 x 1"	118.80
PL1631R0125010	125 x 1"	146.30
PL1631R0160010	160 x 1"	156.75
PL1631R0180010	180 x 1"	192.50



PlasSaddle Threaded

163000 PlasSaddle Threaded

ISO - 7/1 for PE80, PE100, & metric PVC



Code	d	£ ea
PL163000063005	63 x 1/2"	POA
PL163000063007	63 x 3/4"	POA
PL163000063010	63 x 1"	POA
PL163000063013	63 x 1 1/4"	POA
PL163000063015	63 x 1 1/2"	POA
PL163000090005	90 x 1/2"	POA
PL163000090007	90 x 3/4"	POA
PL163000090010	90 x 1"	POA
PL163000090013	90 x 1 1/4"	POA
PL163000090015	90 x 1 1/2"	POA
PL163000110005	110 x 1/2"	POA
PL163000110007	110 x 3/4"	POA
PL163000110010	110 x 1"	POA
PL163000110013	110 x 1 1/4"	POA
PL163000110015	110 x 1 1/2"	POA
PL163000125005	125 x 1/2"	POA
PL163000125007	125 x 3/4"	POA
PL163000125010	125 x 1"	POA
PL163000125013	125 x 1 1/4"	POA
PL163000125015	125 x 1 1/2"	POA
PL163000160005	160 x 1/2"	POA
PL163000160007	160 x 3/4"	POA
PL163000160010	160 x 1"	POA
PL163000160013	160 x 1 1/4"	POA
PL163000160015	160 x 1 1/2"	POA
PL163000180005	180 x 1/2"	POA
PL163000180007	180 x 3/4"	POA
PL163000180010	180 x 1"	POA
PL163000180013	180 x 1 1/4"	POA
PL163000180015	180 x 1 1/2"	POA



16540 Self-Tapping Swivel Tee

Stainless Bolts



Code	d	£ ea
PL165400075025	75 - 25	104.42
PL165400075032	75 - 32	106.02

7991 Tapper Assembly Tool for use with 16540 see page 38.

16076 Saddle Single Outlet

With Reinforcing Ring,
Stainless Bolts



Code	d	£ ea
PL160770020005	20 x 1/2"	6.94
PL160770025005	25 x 1/2"	8.11
PL160770025007	25 x 3/4"	8.11
PL160770032005	32 x 1/2"	8.95
PL160770032007	32 x 3/4"	8.95
PL160770032010	32 x 1"	8.95
PL160770040005	40 x 1/2"	10.14
PL160770040007	40 x 3/4"	10.14
PL160770040010	40 x 1"	10.14
PL160770050005	50 x 1/2"	11.32
PL160770050007	50 x 3/4"	11.32
PL160770050010	50 x 1"	11.32
PL160770050013	50 x 1 1/4"	11.32
PL160770063005	63 x 1/2"	13.57
PL160770063007	63 x 3/4"	13.57
PL160770063010	63 x 1"	13.57
PL160770063013	63 x 1 1/4"	13.57
PL160770063015	63 x 1 1/2"	13.57
PL160770075005	75 x 1/2"	18.46
PL160770075007	75 x 3/4"	18.46
PL160770075010	75 x 1"	18.46
PL160770075013	75 x 1 1/4"	18.46
PL160770075015	75 x 1 1/2"	18.46
PL160770075020	75 x 2"	18.46
PL160770090005	90 x 1/2"	22.42
PL160770090007	90 x 3/4"	22.42
PL160770090010	90 x 1"	22.42
PL160770090013	90 x 1 1/4"	22.42
PL160770090015	90 x 1 1/2"	22.42
PL160770090020	90 x 2"	22.42
PL160770110005	110 x 1/2"	26.61
PL160770110007	110 x 3/4"	26.61
PL160770110010	110 x 1"	26.61
PL160770110013	110 x 1 1/4"	26.61
PL160770110015	110 x 1 1/2"	26.61
PL160770110020	110 x 2"	26.61
PL160770125007	125 x 3/4"	34.91
PL160770125010	125 x 1"	34.91
PL160770125013	125 x 1 1/4"	34.91
PL160770125015	125 x 1 1/2"	34.91
PL160770125020	125 x 2"	34.91
PL160770140010	140 x 1"	41.78
PL160770140013	140 x 1 1/4"	41.78
PL160770140015	140 x 1 1/2"	41.78
PL160770140020	140 x 2"	41.78
PL160770160010	160 x 1"	58.61
PL160770160013	160 x 1 1/4"	58.61
PL160770160015	160 x 1 1/2"	58.61
PL160770160020	160 x 2"	58.61
PL160770180010	180 x 1"	84.30
PL160770180013	180 x 1 1/4"	84.30
PL160770180015	180 x 1 1/2"	84.30
PL160770180020	180 x 2"	84.30

Pushfit



PLASSON pushfit fittings provide an alternative solution to the mechanical range, providing a tamper proof connection to PE and other pipe materials such as copper, PB, PEX. This compact and attractive fitting is ideal for the plumbing market, where space is limited and appearance is crucial. UK Water Reg4 approved and rated to PN16.

1001 Coupler



Code	d	£ ea
PP1001U0020	20	7.02
PP1001U0025	25	7.55
PP1001U0032	32	17.70
PP1001U0040	40	38.39
PP1001U0050	50	42.01
PP1001U0063	63	63.04

1011 Reducing Coupler



Code	d	£ ea
PP1011U0025020	25 x 20	14.12
PP1011U0032020	32 x 20	23.90
PP1011U0032025	32 x 25	23.94
PP1011U0040032	40 x 32	39.92
PP1011U0050025	50 x 25	44.77
PP1011U0050032	50 x 32	51.18
PP1011U0063032	63 x 32	65.55
PP1011U0063050	63 x 50	64.38

1001C Coupler

PE x Cu/PB/PEX



Code	d	£ ea
PP1001CU020015	20 x 15	12.23
PP1001CU025015	25 x 15	12.74
PP1001CU025022	25 x 22	13.06
PP1001CU032028	32 x 28	24.43

1001M Coupler

Metric to Imperial



Code	d	£ ea
PP1001M6020005	20 x 1/2"	8.54
PP1001M6025005	25 x 1/2"	8.98
PP1001M6025007	25 x 3/4"	9.58
PP1001M6032010	32 x 1"	19.50

1002 Male Adaptor



Code	d	£ ea
PP1002U0020005	20 x 1/2"	6.56
PP1002U0020007	20 x 3/4"	7.02
PP1002U0025005	25 x 1/2"	7.87
PP1002U0025007	25 x 3/4"	7.87
PP1002U0025010	25 x 1"	12.23
PP1002U0032007	32 x 3/4"	12.21
PP1002U0032010	32 x 1"	12.21
PP1002U0032013	32 x 1 1/4"	12.21
PP1002U0040010	40 x 1"	24.12
PP1002U0040013	40 x 1 1/4"	24.12
PP1002U0040015	40 x 1 1/2"	24.12
PP1002U0050015	50 x 1 1/2"	30.18
PP1002U0050020	50 x 2"	30.18
PP1002U0063015	63 x 1 1/2"	41.15
PP1002U0063020	63 x 2"	41.15

1002C Male Adaptor

to Cu/PB/PEX



Code	d	£ ea
PP1002CU7015007	15 x 3/4"	10.64
PP1002CU7022007	22 x 3/4"	11.19
PP1002CU7028010	28 x 1"	17.93

1003 Female Adaptor



Code	d	£ ea
PP1003U0020005	20 x 1/2"	7.60
PP1003U0025005	25 x 1/2"	8.70
PP1003U0025007	25 x 3/4"	8.35
PP1003U0025010	25 x 1"	10.95
PP1003U0032007	32 x 3/4"	10.95
PP1003U0032010	32 x 1"	10.95
PP1003U0032013	32 x 1 1/4"	10.95
PP1003U0040013	40 x 1 1/4"	26.57
PP1003U0050015	50 x 1 1/2"	35.97
PP1003U0050020	50 x 2"	35.97
PP1003U0063015	63 x 1 1/2"	53.46
PP1003U0063020	63 x 2"	53.46

1003C Female Adaptor

to Cu/PB/PEX



Code	d	£ ea
PP1003CU7015007	15 x 3/4"	14.15
PP1003CU7022007	22 x 3/4"	14.67



1004 90° Tee



Code	d	£ ea
PP1004U0020	20	11.62
PP1004U0025	25	19.24
PP1004U0032	32	26.00
PP1004U0040	40	49.65
PP1004U0050	50	54.40
PP1004U0063	63	84.61

1034 90° Reducing Tee



Code	d	£ ea
PP1034U0025020	25 x 20 x 25	21.93
PP1034U0032020	32 x 20 x 32	29.49
PP1034U0032025	32 x 25 x 32	29.46

1014 90° Tee

Female Threaded



Code	d	£ ea
PP1014U0020005	20 x 1/2" x 20	10.81
PP1014U0025007	25 x 3/4" x 25	16.26
PP1014U0032010	32 x 1" x 32	22.62

1015 90° Female Elbow



Code	d	£ ea
PP1015U0020005	20 x 1/2"	8.40
PP1015U0020007	20 x 3/4"	8.40
PP1015U0025005	25 x 1/2"	11.18
PP1015U0025007	25 x 3/4"	11.18
PP1015U0025010	25 x 1"	11.18
PP1015U0032007	32 x 3/4"	18.13
PP1015U0032010	32 x 1"	18.13

1085 90° Male Elbow



Code	d	£ ea
PP1085U0020005	20 x 1/2"	6.36
PP1085U0020007	20 x 3/4"	6.36
PP1085U0025005	25 x 1/2"	7.40
PP1085U0025007	25 x 3/4"	7.40
PP1085U0025010	25 x 1"	7.40
PP1085U0032007	32 x 3/4"	12.47
PP1085U0032010	32 x 1"	12.47
PP1085U0032013	32 x 1 1/4"	12.47
PP1085U0040013	40 x 1 1/4"	24.02
PP1085U0050015	50 x 1 1/2"	33.95
PP1085U0063020	63 x 2"	41.37

1005 90° Elbow



Code	d	£ ea
PP1005U0020	20	8.70
PP1005U0025	25	12.80
PP1005U0032	32	21.10
PP1005U0040	40	41.82
PP1005U0050	50	45.06
PP1005U0063	63	60.97

1051 90° Reducing Elbow



Code	d	£ ea
PP1051U0025020	25 x 20	14.53

1005M 90° Elbow

Metric to Imperial



Code	d	£ ea
PP1005M6025005	25 x 1/2"	15.70
PP1005M6025007	25 x 3/4"	15.29

1075 Wall Plate Elbow



Code	d	£ ea
PP1075U0020005	20 x 1/2"	17.15
PP1075U0020007	20 x 3/4"	17.15
PP1075U0025005	25 x 1/2"	22.87
PP1075U0025007	25 x 3/4"	22.87

1012 End Plug



Code	d	£ ea
PP1012U0020	20	8.68
PP1012U0025	25	11.10
PP1012U0032	32	16.20
PP1012U0040	40	27.90
PP1012U0050	50	35.18
PP1012U0063	63	52.03

A liner must be used with metric MDPE pipe to ensure conformance with UK Water Reg4. See page 14 for 7950 liners. When using PB/PEX pipes, use pipe manufacturers liner.

Valves

UK Water Reg4 approved stop taps for above & below ground use. Body & nut are made from polypropylene, the 'O' ring from high quality NBR.



3407 Stop Tap

Above & Below Ground



Code	d	£ ea
PV03407020	20	37.75
PV03407025	25	53.54
PV03407032	32	82.92

3405 Stop Tap

Above & Below Ground
FI x FI



Code	d	£ ea
PV03404077	3/4"	18.65
PV03404110	1"	20.28

3489 Stop Tap

for Imperial Pipe



Code	d	£ ea
PV0340M0005	1/2"	43.43
PV0340M0007	3/4"	61.57

7509 Stop Tap

Irish Normal Gauge



Code	d	£ ea
PL0340N0005	1/2" x 1/2"	35.87
PL0340N0007	3/4" x 3/4"	42.81

7609 Stop Tap

Irish Heavy Gauge



Code	d	£ ea
PL0340H0005	1/2" x 1/2"	35.87
PL0340H0007	3/4" x 3/4"	42.81

0341 Pushfit Stop Tap

Above & Below Ground



Code	d	£ ea
PV0341U0020	20	41.54
PV0341U0025	25	58.87
PV0341U0032	32	91.25


0341C Pushfit Stop Tap

PE x Cu/PB/PEX

Above Ground Only



Code	d	£ ea
PV0341CU020015	20 x 15	52.68
PV0341CU025015	25 x 15	71.23
PV0341CU025022	25 x 22	80.62
PV0341CU032028	32 x 28	104.85

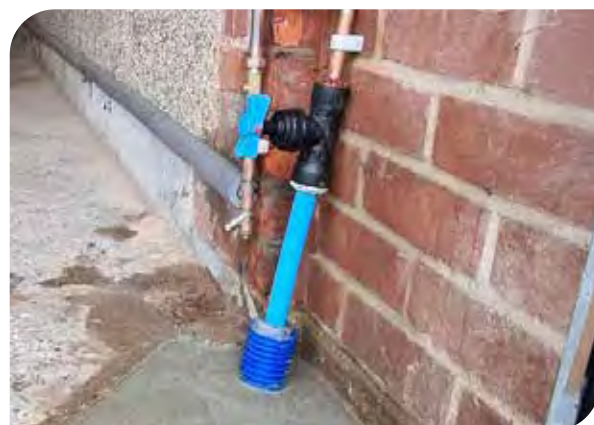

3610 Stop Tap Chamber

with plastic lid or cast lid

Code	d	£ ea
PD36100P	c/w plastic lid	51.50
PD36100C	c/w cast lid	121.45

- For 20, 25 & 32mm PLASSON stop taps
- 750mm guard tube can be cut to length
- Plastic lid: 1 ton rated (Class C rated)
- Cast iron lid: 5 ton rated (Class B rated)



Components for 3610



Code	d	£ ea
PD3612025	750mm tube	18.39
PD3613025	sleeve	7.85
PD3611025	base	15.74
PD3614025	4" surface box plastic	15.24
PD3605001	6" surface box cast	82.21

3703 Mains Stop Valve Above & Below Ground



Full bore 1/4 turn ball valve with a drain port option, for mains isolation

Manufactured from glass reinforced polyamide, the 3703 now provides an alternative solution to the traditionally used gunmetal and dZR stop valves.

The 3703 is a UK Water Reg4 approved stop valve for 1½"/50mm and 2"/63mm mains pipe manufactured from non metallic materials. The ¾" - 2" range give a full bore alternative to the standard stop tap.

Approved to BS8588:2017 the 3703 is the new standard for use in contaminated ground, at all sizes.

For above ground use, a version is available which has drain/test ports on one end of the valve.

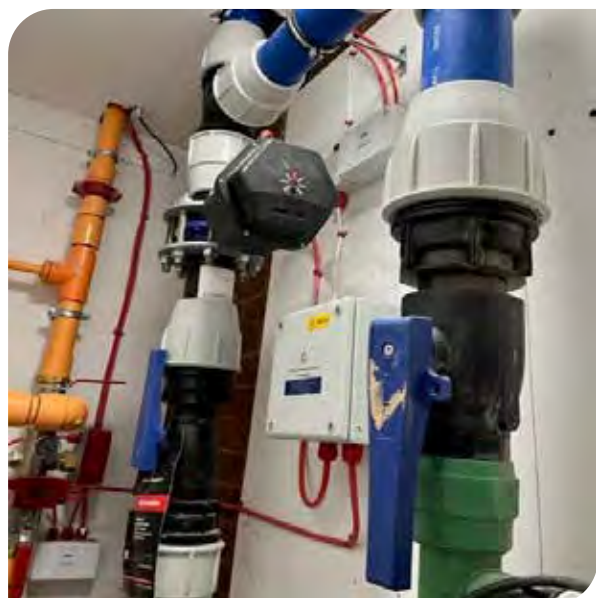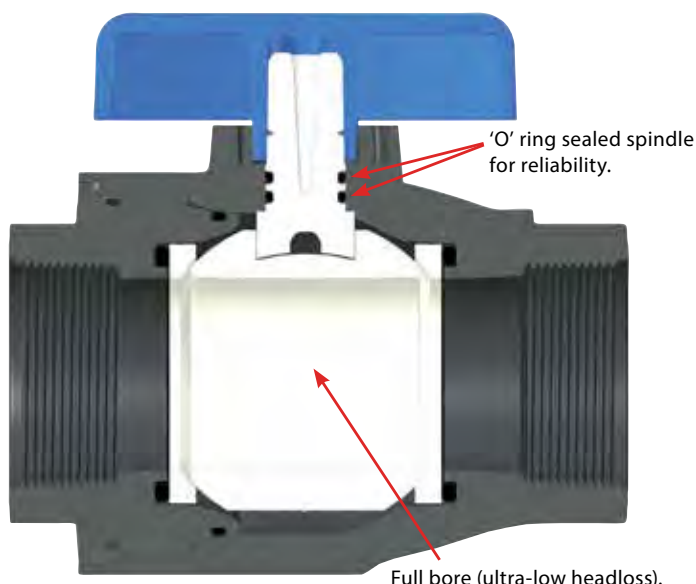

3703 Mains Stop Valve

Above & Below Ground

FI x FI



Code	d	dn	£ ea
PV0370300007	¾"	20	59.64
PV0370300010	1"	25	70.62
PV0370300013	1 ¼"	32	84.74
PV037030U0015	1 ½"	40	102.01
PV037030U0020	2"	50	149.08

3703 Mains Stop Valve

Above & Below Ground

FI x FI



Code	d	dn	£ ea
PV0370300050	50mm	40	156.31
PV0370300063	63mm	50	221.84

3703 Mains Stop Valve

c/w Drain / Test Ports

Above Ground Only

FI x FI



Code	d	dn	£ ea
PV037030F007	¾"	20	75.33
PV037030F010	1"	25	86.32
PV037030F013	1 ¼"	32	102.01
PV037030F015	1 ½"	40	112.99
PV037030F020	2"	50	172.65



9048 Universal Stop Tap DZR

Above & Below Ground

Internal 1½" FI thread
External 2" MI thread



Code	d	£ ea
PV9048020	1 1/2" FI / 2" MI	394.06
PV9048050	50	460.85
PV9048063	63	478.03

BS5433 Valves

9053 Stop Tap Gun Metal

BS5433 FI x FI



Code	d	£ ea
PV9053100	1/2"	59.58
PV9053200	3/4"	110.53
PV9053300	1"	129.73
PV9053500	1 1/2"	437.04
PV9053600	2"	607.00

9050 Universal Stop Tap DZR

Above & Below Ground



Code	d	£ ea
PV9050020	20	71.63
PV9050025	25	90.44
PV9050032	32	189.39

9051 Universal Stop Tap DZR

Above & Below Ground

Square Drive



Code	d	£ ea
PV9051528	20	71.63
PV9051529	25	90.44
PV9051530	32	189.39

WIS 4-23-04 Valves

9061 Plug Tap DZR

WIS 4-23-04 Type



Code	d	£ ea
PV9061005	25	127.08
PV9061007	32	165.33



Polymer Ball Valves

1379 Ball Valve PVC

PE x FI



Code	d	£ ea
PV1379020K	20 x 1/2"	31.12
PV1379025K	25 x 3/4"	35.74
PV1379032K	32 x 1"	48.21
PV1379040K	40 x 1 1/4"	58.08
PV1379050K	50 x 1 1/2"	79.10
PV1379063K	63 x 2"	140.36

1151 Ball Valve PVC

Double Union FI x FI



Code	d	£ ea
PV1151003K	3/8"	30.91
PV1151005K	1/2"	30.91
PV1151007K	3/4"	33.19
PV1151010K	1"	41.33
PV1151013K	1 1/4"	43.38
PV1151015K	1 1/2"	71.43
PV1151020K	2"	97.01
PV1141025K	2 1/2"	253.94
PV1141030K	3"	336.44
PV1141040K	4"	425.39

2099 Arctic Ball Valve

Ice Resistant

FI x FI



Code	d	£ ea
PV2099001	1/2"	30.36
PV2099002	3/4"	37.07
PV2099003	1"	53.90

Quick Coupling Valve & Key

Flexible, Quick & Easy



The Quick Coupling Valve allows temporary access to a water sprinkler system with the use of a valve key.

Ideal for using in livestock watering systems, sprinkler irrigation systems and landscaping irrigation.

- Single action snap-in-key opens valve for water flow into hose/sprinkler. Just snap key in place at the desired fixed valve position, and you're ready to go. No turning water mains on and off.
- Easy release of key, automatically shuts valve.
- Time and money saving.
- Highly durable and reliable.



3039 Quick Coupling Valve & Key



Code	d	£ ea
PV03039037	3/4" Valve	28.79
PV03039030	1" Valve	28.79
PV03139020	Valve Key	12.12

Valves for welding (Electrofusion connection)

1148 Ball Valve EF PVC

Double Spigot



Code	d	£ ea
PV1148020	20	44.52
PV1148025	25	49.95
PV1148032	32	54.85
PV1148040	40	73.03
PV1148050	50	85.04
PV1148063	63	109.89

1378 Ball Valve EF PVC

PE x Single Spigot



Code	d	£ ea
PV1378020	20	33.66
PV1378025	25	36.34
PV1378032	32	39.06
PV1378040	40	52.94
PV1378050	50	71.58
PV1378063	63	107.35

43620 EF Ball Valve PE

Double Spigot

(In accordance with BSEN12201 & BSEN1555)



Code	d	£ ea
PV436207025	25	228.50
PV436207032	32	211.59
PV436207040	40	263.65
PV436207050	50	316.38
PV436207063	63	333.97
PV436207075	75	351.54
PV436207090	90	615.22
PV436207110	110	703.11
PV436207125	125	790.99
PV436207160	160	1,271.15

For operating key see page 38.

Check Valves (UK Water Reg4 Approved)

9077 Double Check Valve DZR

FI x FI



Code	d	£ ea
PV9077100	1/2"	36.60
PV9077200	3/4"	75.90
PV9077300	1"	133.39
PV9077500	1 1/2"	326.34
PV9077600	2"	422.55

9078 Single Check Valve DZR

FI x FI



Code	d	£ ea
PV9078500	1 1/2"	154.42
PV9078600	2"	199.96

Check Valves (Non UK Water Reg4 Approved)

9057 Double Check Valve DZR

FI x FI



Code	d	£ ea
PV9057100	1/2"	14.96
PV9057200	3/4"	26.14
PV9057300	1"	35.52



1061 Non Return Valve PVC

FI x FI



Code	d	£ ea
PV1061003K	3/8"	51.17
PV1061005K	1/2"	51.34
PV1061007K	3/4"	63.32
PV1061010K	1"	71.97
PV1061013K	1 1/4"	90.53
PV1061015K	1 1/2"	132.29
PV1061020K	2"	185.45

1631 Air Release Valve PVC

Vertically Mounted

FI x FI



Code	d	£ ea
PV1631005K	1/2"	51.34
PV1631007K	3/4"	63.32
PV1631010K	1"	71.97
PV1631013K	1 1/4"	90.53
PV1631015K	1 1/2"	132.29
PV1631020K	2"	185.45

3047 Angle Seat Valve PP

MI x MI



Code	d	£ ea
PV03047055	1/2"	20.20
PV03047077	3/4"	22.53
PV03047110	1"	26.73
PV03047188	1 1/4"	75.89
PV03047155	1 1/2"	85.12
PV03047220	2"	105.28

3048 Angle Seat Valve PP

PE x MI Thread



Code	d	£ ea
PV03048200	20 x 1/2"	24.55
PV03048250	25 x 3/4"	25.00
PV03048320	32 x 1"	30.69
PV03948400	40 x 1 1/4"	89.94
PV03948500	50 x 1 1/2"	99.57
PV03948630	63 x 2"	125.04

9056 Bib Tap Hose Union DZR

c/w Double Check Valve



Code	d	£ ea
PV9056005	1/2"	19.90
PV9056007	3/4"	53.90

9076 Bib Tap Hose Union DZR



Code	d	£ ea
PV9076100	1/2"	13.48
PV9076200	3/4"	32.89

9070 Bib Tap DZR

Lockshield BS1010



Code	d	£ ea
PV9070100	1/2"	35.52

9071 Bib Tap DZR

Lockshield BS1010
with Check Valve



Code	d	£ ea
PV9071100	1/2"	70.84

2100 Arctic Ice Resistant

Bib Cock



Code	d	£ ea
PV2100001	1/2"	30.36
PV2100003	3/4"	46.64
PV2100004	1"	68.61

2100 Bib Cock

Lever Handle



Code	d	£ ea
PV2100005	1/2"	14.67
PV2100007	3/4"	26.98

7750 Wall Plate Elbow PP



Code	d	£ ea
PL077500020005	20 x 1/2"	16.03
PL077500025007	25 x 3/4"	21.37

1075 Pushfit Wall Plate Elbow PP



Code	d	£ ea
PP1075U0020005	20 x 1/2"	17.15
PP1075U0020007	20 x 3/4"	17.15
PP1075U0025005	25 x 1/2"	22.87
PP1075U0025007	25 x 3/4"	22.87

9055 Wall Plate Elbow DZR



Code	d	£ ea
PV9055005	20 x 1/2"	34.83
PV9055007	25 x 3/4"	43.69

1000 Wall Plate Elbow



Code	d	£ ea
PL9075020005	20 x 1/2"	20.48
PL9075025005	25 x 1/2"	21.77
PL9075025007	25 x 3/4"	27.13



Water Meter Connection & Manifolds



Connecting meters below ground

Boundary boxes, lids and meter connection points for underground installation.

3511 MCP (BG) Kit Below Ground Use

No Drain Off



(Supplied with full flow cap)


Code	d	£ ea
PV03510020	25	82.78

3513/4 Meter Boundary Box

Cast iron lid: 5 ton rated (Class B rated).

Plastic lid: 1 ton rated (Class C rated).

Includes 3511 stop valve and meter mount.

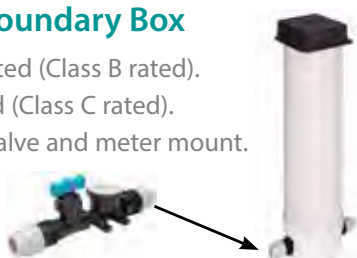

Code	d	£ ea
PD35100C	c/w cast lid	203.25
PD35100P	c/w plastic lid	156.19

Boundary Box Lid



Code	d	£ ea
PD3605001	6" surface box cast	82.21
PD3604001	9" surface box plastic	42.22

Components for 3513/4

Code	d	£ ea
PD3602001	650mm guard tube	29.32
PD3607001	foam insulation plug	4.65
PD3513A	meter box base	13.99

3543/4 Adjustable Boundary Box Standard & Contaminated (Barrier)

3/4" FI connection to barrier pipe.
25mm pushfit for connection to metric PE.
Height adjustable 500mm - 800mm.




Code	d	£ ea
PD35440B	3/4"	349.36
PD35430P	25	203.25

Below-Ground Manifolds

Our below-ground manifolds provide a complete solution for multi-use water distribution, combining flexibility and ease of installation in one unified package.

The robust header efficiently divides the incoming mains water supply into 4 or 6 individual outlets, each equipped with a pre-fitted stop tap and optional meter housing unit.

3515 Below-ground Manifold with Stop Tap

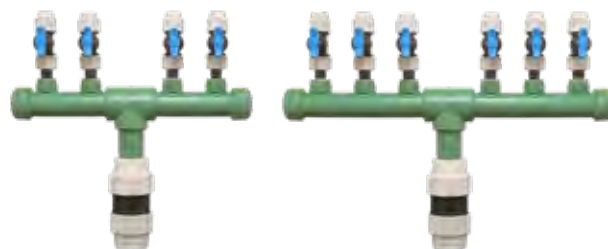

Code	d	Description	£ ea
PD3515C04ST063	63 x 25	4 Port Manifold c/w Stop Tap	757.14
PD3515C06ST063	63 x 25	6 Port Manifold c/w Stop Tap	969.28

3515 Below-ground Manifold with MCP (BG) Kit

(Supplied with full flow cap)



Code	d	Description	£ ea
PD3515C04MC063	63 x 25	4 Port Manifold c/w MCP Kit	874.10
PD3515C06MC063	63 x 25	6 Port Manifold c/w MCP Kit	1144.72

9001 Concentric Water Meter

1 1/2" BSP

ISO 4064 (class D), BS-EN 14154,
UK Water Reg4.



Code	Nominal Size	Nominal Flow Rate (m3/h)	£ ea
PD9001015	15mm	1.6	178.46

Installation Requirements

The meter can be installed in any position (horizontal, vertical or inclined).

The meter must be always full of water while operating.

Prior to the installation of a new meter, the pipeline must be flushed out.

PLASSON® MCP




For single meter connection - above ground use only

Many water meter connections are now required inside domestic properties (replacing the traditional boundary box / underground position). WATER UK & the HBF (Home Builders Federation) Meter Location Best Practice Guidelines state the stop tap and water meter should be located above ground. For a single housing unit, a standard meter manifold requires a drain port to be incorporated into the assembly.

The new PLASSON MCP (meter connection point) provides mains isolation, meter connection, drain point and back flow prevention in a compact one piece unit.

Key Features

- Monobloc design for quick and easy installation
- Quarter turn high flow mains stop valve
- 1 1/2" Class D concentric meter connection
- Approved double check valve built in
- Built in drain point
- NBR & EPDM sealing for water tight integrity
- Kiwa UK Regulation 4 (KUKreg4) approved

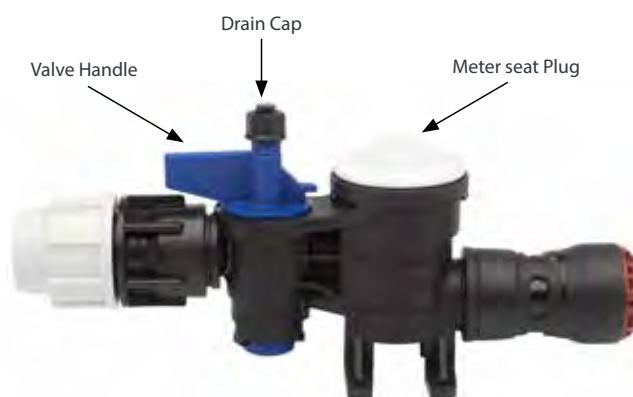


MCP - for single meter connection

Code	Description	£ ea
PM0351071025025	MCP 25mm PE x 25mm PE	154.00
PM0351071025015	MCP 25mm PE x 15mm Cu/PB/PEX	148.50
PM0351071025022	MCP 25mm PE x 22mm Cu/PB/PEX	148.50
PM0351021025022	MCP 25mm Barrier x 22mm Cu/PB/PEX	154.00
PM0351071022022	MCP 22mm Cu/PB/PEX x 22mm Cu/PB/PEX	154.00
PM0351071028028	MCP 28mm Cu/PB/PEX x 28mm Cu/PB/PEX	154.00



UUV 15mm & 20mm Meter Location Policy: Internal Meter Installation

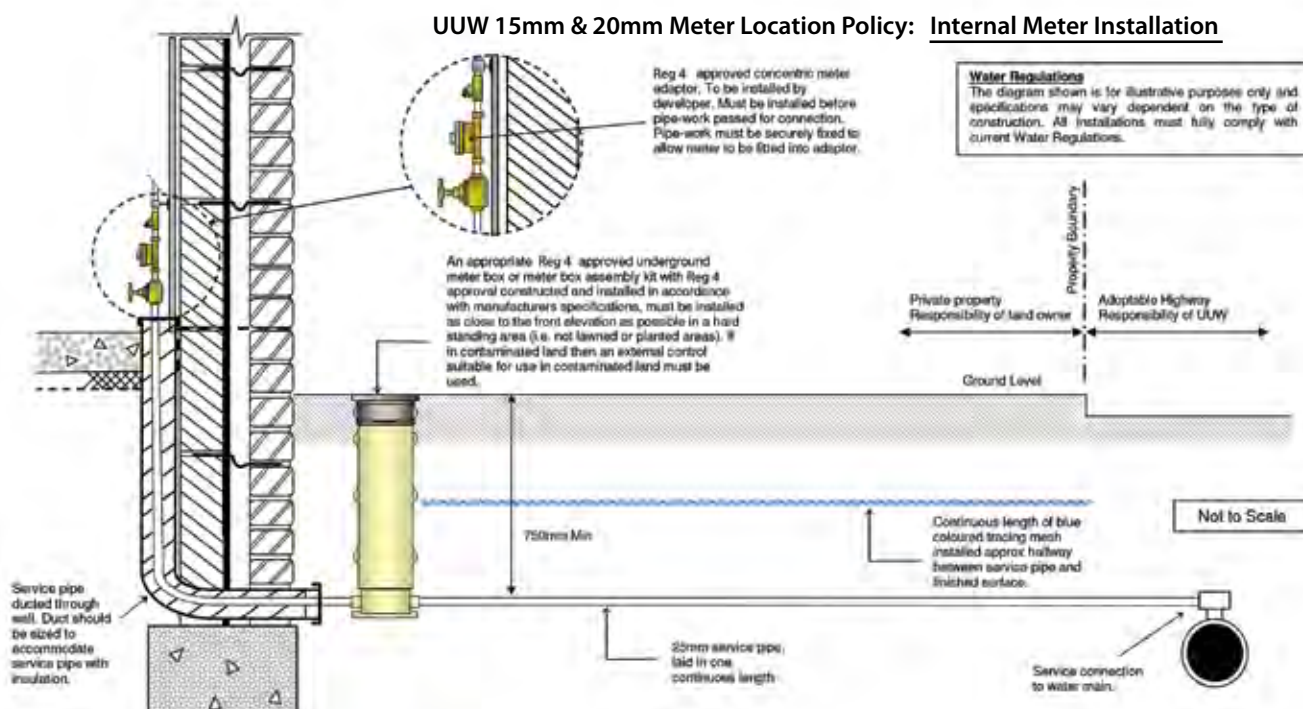

PLASSON® MCP System



The PLASSON MCP system allows the division of the mains water supply and the installation of a water meter for individual properties in multi-dwelling buildings as required by guidelines and requirements of the UK Water Utility companies and the Water Supply (Water Fittings) Regulations:

- Isolate the incoming water main / boosted water supply
- Split incoming water supply by way of manifold
- Isolate water supply to individual dwelling
- Provide connection point for class D water meter (normally supplied by Water Utility company)
- Provide backflow prevention with serviceable double check valve (ED suitable for fluid category 3)
- Provide a drain point for the property, with the individual property main isolated
- Allow connection to all proprietary plumbing pipework systems

The combination of the new MCP unit and the manifold system brings a complete new dimension to the M&E contractor and plumber providing a simple and cost effective system to this often overlooked but vitally important part of any building infrastructure. The MCP unit is manufactured from high grade engineering polypropylene, and the manifold system from PP-RCT, all components approved to UK Water Reg4 either by Kiwa KUKreg4 or WRAS approvals.

Combined with the extensive range of PLASSON fittings and Mains Stop Valves, the new PLASSON MCP system provides an unrivalled solution for all stake holders involved in the domestic and commercial mechanical services sector.



For full details on PLASSON MCP System [click here](#)



PLASSON® MCP (meter connection point)

PLASSON MCP unit


The new PLASSON MCP (meter connection point) provides mains isolation, meter connection, drain point and back flow prevention in a compact one piece unit.

Designed specifically for multi-occupancy buildings, such as apartments and high-rise, the PLASSON MCP can be fitted at each apartment, or more commonly it can simply be connected to the PLASSON multi-port manifold system located in a riser or plant room.

The MCP is supplied with connections to suit pipework on site, such as 22 and 28mm Cu/PB/PEX, MDPE or 3/4" BSPP (ISO 228) for connection to any other fitting type.

Key Features

- Quarter turn high flow mains stop valve
- 1 1/2" Class D concentric meter connection with full flow
- Approved double check valve built in under meter seat
- Drain point that isolates property from main supply while in drain position
- Space saving monobloc design for quick and easy installation
- NBR & EPDM sealing throughout for complete water tight integrity
- Kiwa UK Regulation 4 (KUKreg4) approved

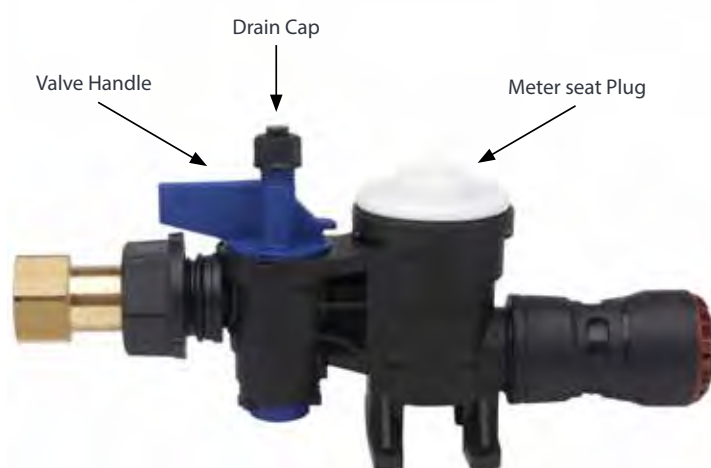

MCP - BSPP x BSPP

Code	Description	£ ea
PM0351071897007	MCP 3/4" BSPP x 3/4" BSPP	176.00




MCP - BSPP x Cu/PB/PEX

Code	Description	£ ea
PM0351071897022	MCP 3/4" BSPP x 22mm Cu/PB/PEX	167.20
PM0351071897028	MCP 3/4" BSPP x 28mm Cu/PB/PEX	167.20



MCP - BSPP x PE

Code	Description	£ ea
PM0351071897025	MCP 3/4" BSPP x 25mm PE	165.00
PM0351071897032	MCP 3/4" BSPP x 32mm PE	165.00

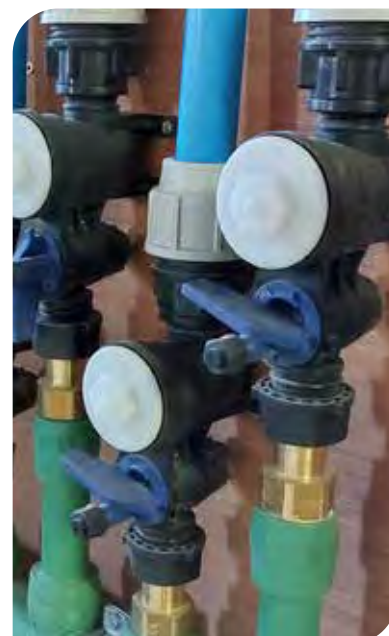

PLASSON® Multiport Manifolds

Starting July 2025 our manifold offering will be improved and updated. Please be aware before finalising your design. Contact PLASSON for details.

The PLASSON Multiport Manifold system is designed to connect incoming water mains and enable separation into individual supply pipes for connection of multiple dwellings.

An extensive range of one piece construction manifolds are available with between 2 and 16 outlets. There are two options for connecting the incoming supply, and outlets at either 130mm centres, allowing meter faces to line up, or 90mm centres alternately staggered, both meeting the water utility companies installation requirements for water meters.

End Supply Manifolds

130mm centres

Plain end



130mm Centres - Plain End	PORTS	£ ea
PM3525E 3B02	3	401.50
PM3525E 4B02	4	462.00
PM3525E 5B02	5	522.50
PM3525E 6B02	6	583.00
PM3525E 7B02	7	643.50
PM3525E 8B02	8	704.00
PM3525E 9B02	9	764.50
PM3525E 10B02	10	825.00
PM3525E 11B02	11	885.50
PM3525E 12B02	12	946.00
PM3525E 13B02	13	1,006.50
PM3525E 14B02	14	1,067.00
PM3525E 15B02	15	1,127.50
PM3525E 16B02	16	1,188.00

130mm centres

2" MI end



130mm Centres - 2" MI End	PORTS	£ ea
PM3525E 3B03	3	445.50
PM3525E 4B03	4	506.00
PM3525E 5B03	5	566.50
PM3525E 6B03	6	627.00
PM3525E 7B03	7	687.50
PM3525E 8B03	8	748.00
PM3525E 9B03	9	808.50
PM3525E 10B03	10	869.00
PM3525E 11B03	11	929.50
PM3525E 12B03	12	990.00
PM3525E 13B03	13	1,050.50
PM3525E 14B03	14	1,111.00
PM3525E 15B03	15	1,171.50
PM3525E 16B03	16	1,232.00



90mm centres

Plain end



90mm Centres - Plain End	PORTS	£ ea
PM3525E 3A02	3	462.55
PM3525E 4A02	4	543.40
PM3525E 5A02	5	624.25
PM3525E 6A02	6	705.10
PM3525E 7A02	7	785.95
PM3525E 8A02	8	866.80
PM3525E 9A02	9	947.65
PM3525E 10A02	10	1,028.50
PM3525E 11A02	11	1,109.35
PM3525E 12A02	12	1,190.20
PM3525E 13A02	13	1,271.05
PM3525E 14A02	14	1,351.90
PM3525E 15A02	15	1,432.75
PM3525E 16A02	16	1,513.60

90mm centres

2" MI end



90mm Centres - 2" MI End	PORTS	£ ea
PM3525E 3A03	3	506.55
PM3525E 4A03	4	587.40
PM3525E 5A03	5	668.25
PM3525E 6A03	6	749.10
PM3525E 7A03	7	829.95
PM3525E 8A03	8	910.80
PM3525E 9A03	9	991.65
PM3525E 10A03	10	1,072.50
PM3525E 11A03	11	1,153.35
PM3525E 12A03	12	1,234.20
PM3525E 13A03	13	1,315.05
PM3525E 14A03	14	1,395.90
PM3525E 15A03	15	1,476.75
PM3525E 16A03	16	1,557.60

Centre Supply Manifolds

130mm centres

Plain end



130mm Centres - Plain End	PORTS	£ ea
PM3525C 4B02	4	495.00
PM3525C 5B02	5	544.50
PM3525C 6B02	6	594.00
PM3525C 7B02	7	643.50
PM3525C 8B02	8	693.00
PM3525C 9B02	9	742.50
PM3525C 10B02	10	792.00
PM3525C 11B02	11	841.50
PM3525C 12B02	12	891.00
PM3525C 13B02	13	940.50
PM3525C 14B02	14	990.00
PM3525C 15B02	15	1,039.50
PM3525C 16B02	16	1,089.00

90mm centres

Plain end



90mm Centres - Plain End	PORTS	£ ea
PM3525C 4A02	4	576.40
PM3525C 5A02	5	646.25
PM3525C 6A02	6	716.10
PM3525C 7A02	7	785.95
PM3525C 8A02	8	855.80
PM3525C 9A02	9	925.65
PM3525C 10A02	10	995.50
PM3525C 11A02	11	1,065.35
PM3525C 12A02	12	1,135.20
PM3525C 13A02	13	1,205.05
PM3525C 14A02	14	1,274.90
PM3525C 15A02	15	1,344.75
PM3525C 16A02	16	1,414.60

130mm centres

2" MI end



130mm Centres - 2" MI End	PORTS	£ ea
PM3525C 2B03	2	580.25
PM3525C 4B03	4	646.25
PM3525C 5B03	5	695.75
PM3525C 6B03	6	745.25
PM3525C 7B03	7	794.75
PM3525C 8B03	8	844.25
PM3525C 9B03	9	893.75
PM3525C 10B03	10	943.25
PM3525C 11B03	11	992.75
PM3525C 12B03	12	1,042.25
PM3525C 13B03	13	1,091.75
PM3525C 14B03	14	1,141.25
PM3525C 15B03	15	1,190.75
PM3525C 16B03	16	1,240.25

90mm centres

2" MI end



90mm Centres - 2" MI End	PORTS	£ ea
PM3525C 4A03	4	668.25
PM3525C 5A03	5	723.25
PM3525C 6A03	6	778.25
PM3525C 7A03	7	833.25
PM3525C 8A03	8	888.25
PM3525C 9A03	9	943.25
PM3525C 10A03	10	998.25
PM3525C 11A03	11	1,053.25
PM3525C 12A03	12	1,108.25
PM3525C 13A03	13	1,163.25
PM3525C 14A03	14	1,218.25
PM3525C 15A03	15	1,273.25
PM3525C 16A03	16	1,328.25

Drain off cock (DOC) for manifolds

To add a DOC to any of the above manifolds, order code PM3525DOC for each manifold ordered.



Code	Description	£ ea
PM3525DOC	Drain point for PP-RCT manifold	59.40



Key Features

- One piece construction from PP-RCT
- 2 outlet to 16 outlet ports from 63mm header
- End Supply and Centre Supply options
- Plain end for connection with PLASSON fitting or 2" MI BSP connection
- 130mm straight or 90mm staggered centres to allow meter installation position as per Water Utility company requirements
- Specifically designed to work with the PLASSON MCP Meter connection point
- Available with or without drain port

PlassGas reusable

For purging and bypass applications on low and medium pressure gas mains.

Do not backfill as these fittings are for temporary use only and are recommended for a maximum 168 hour (7 day) use.



PlassGas are a unique multiple reusable fitting for the gas industry, requiring basic tooling to install.

This concept reduces onsite labour and material costs, and your **CARBON FOOTPRINT**.

Purging

A standard tapping tee now replaces the specialist dedicated purge tee, this enables the installer to simply connect a PlassGas Reusable Threaded Elbow directly onto an industry standard vent stack for everyday purging applications, time and time again.

For temporary capping off, install a PlassGas Reusable End Cap to the standard tapping tee, this can now become your first connection the following day.

Building a Bypass

By using PlassGas Reusable fittings there is no longer a requirement for single use electrofusion fittings which are later discarded along with the pipe and valves.

Simply construct your bypass with PlassGas Reusable fittings then once it's served its purpose can be disconnected, keeping valve and pipe assemblies in tact, stored and ready for the next installation. Alternatively if using a Flexi Hose system, PlassGas Reusable offers a solution to connect directly onto a standard tapping tee.

The PlassGas Reusable step by step installation guide is available to download from our website.

For product demo please visit:

<https://www.youtube.com/watch?v=6-QwdbmsXJQ>

1099 PlassGas Wrench



Code	d	£ ea
PG10990032P	for 32mm	31.02
PG10990063P	for 63mm	55.51

7960 Chamfer Tool



Code	d	£ ea
PJ189600063020P	20-63	114.84

1077 Reusable MI Elbow



Code	d	£ ea
PG1077UQ032010	32 x 1"	63.57
PG1077UQ063020	63 x 2"	142.53

1076 Reusable FI Elbow



Code	d	£ ea
PG1076UQ032010	32 x 1"	63.57
PG1076UQ063020	63 x 2"	142.53

1005 Reusable 90° Elbow



Code	d	£ ea
PG1005UQQ032	32	57.11
PG1005UQQ063	63	127.09

1001 Reusable Coupler



Code	d	£ ea
PG1001UQQ032	32	54.12
PG1001UQQ063	63	127.09

1012 Reusable End Cap



Code	d	£ ea
PG1012UQ0032	32	37.57
PG1012UQ0063	63	82.63

1072 Reusable MI Adaptor



Code	d	£ ea
PG1072UQ063020	63 x 2"	128.57

1004 Reusable 90° Tee



Code	d	£ ea
PG1004UQQ032	32	63.00
PG1004UQQ063	63	148.01

Repair clamps

The PLASSON range of Repair Clamps are designed to repair water mains pipes where corrosion or mechanical damage has caused leakage. The clamps materials are selected to give maximum service life and are designed for ease of use. All materials meet the requirements of UK Water Reg4 and DWI Reg 31 for use on potable water systems. Both types are PN16 pressure rated & have a waffle type seal ensuring optimum seal. The design of the clamps reduces the size of excavation required and each have an excellent tolerance range.



Stainless Steel

- Stainless steel construction with ductile clamping jaws.
- Can be used on live mains.
- Captive bolts with nuts that do not require removal to use the clamp.

6800 Repair Clamp

Stainless

(76mm - 1 bolt)



Code	d	£ ea
PK6800200	21-25 x 76	17.13
PK6800300	26-30 x 76	19.24
PK6800400	33-37 x 76	20.35
PK6800500	42-45 x 76	20.70
PK6800600	48-51 x 76	21.27
PK6800700	60-65 x 76	34.91

6800 Repair Clamp

Stainless

(200mm - 3 bolt)



Code	d	£ ea
PK6800750	78-88 x 200	181.06
PK6800800	88-98 x 200	188.54
PK6800850	92-103 x 200	198.46
PK6800875	108-118 x 200	202.64
PK6800900	114-126 x 200	206.42
PK6800100	168-182 x 200	239.92

6800 Repair Clamp

Stainless

(300mm - 4 bolt)



Code	d	£ ea
PK6800110	210-223 x 300	353.49
PK6800120	222-234 x 300	356.19
PK6800130	243-255 x 300	383.32
PK6800140	273-285 x 300	523.93
PK6800150	285-297 x 300	523.93

Ductile Iron

- Ductile iron construction with epoxy coating and stainless bridging plates.
- Two part body separates so it can be used without cutting the pipe.
- Captive bolts with heads retained in recesses. Only one tool required for tightening.

6801 Repair Clamp

Ductile Iron

(200mm - 4 bolt)



Code	d	£ ea
PK6801100	92-103 x 200	259.74
PK6801200	115-125 x 200	275.67
PK6801300	141-154 x 200	293.05
PK6801400	166-181 x 200	316.68
PK6801500	216-226 x 200	543.55

Materials Chart for Ductile Iron

Component	Materials
Clamp Body	Ductile Iron GJS 400-15 UNI EN 1563
Clamp Coating	PPA 571 ES Blue 536
Bridging Plates	Stainless Steel AISI 304 18.8
Waffle Seal	EDPM APE 55N Shore 53 + or -5 water Reg. 4 approved material
Bolts	High Tensile Steel, Galvanised M12 & M16

Materials Chart for Stainless Steel

Component	Materials
Clamp Shell	Stainless Steel AISI 304 18.8
Clamp Jaws	EN-GJS-400-15 acc. to UNI EN 1563 norms
Waffle Seal	EDPM APE 55N Shore 53 + or -5 water Reg.4 approved material
Bolts	High Tensile Steel, Galvanised M14 (multi bolt)

Threaded

A range of quality BSP threaded fittings made from Polypropylene and rated to 16 bar. Ideal replacement for gunmetal and bronze that will not corrode. We recommend the use of PTFE tape on all threaded fittings (see page 39).

5017 Threaded Socket



Code	d	£ ea
PT050107005	1/2"	3.16
PT050107007	3/4"	4.61
PT050107010	1"	5.74
PT050107013	1 1/4"	6.30
PT050107015	1 1/2"	7.36
PT050107020	2"	16.45
PT050107030	3" (PVC)*	40.00

5067 Threaded Nipple



Code	d	£ ea
PT050607005	1/2"	2.64
PT050607007	3/4"	2.94
PT050607010	1"	3.49
PT050607013	1 1/4"	5.32
PT050607015	1 1/2"	6.97
PT050607020	2"	10.34
PT050607030	3" (PVC)*	30.68

5117 Threaded Reducing Socket



Code	d	£ ea
PT051107007005	3/4" x 1/2"	3.78

5077 Threaded Cap



Code	d	£ ea
PT050707005	1/2"	2.21
PT050707007	3/4"	2.37
PT050707010	1"	3.21
PT050707013	1 1/4"	3.78
PT050707015	1 1/2"	5.74
PT050707020	2"	8.18

5065 Reducing Nipple



Code	d	£ ea
PT050605007005	3/4" x 1/2"	2.94
PT050605010005	1" x 1/2"	3.49
PT050605010007	1" x 3/4"	3.49
PT050605013005	1 1/4" x 1/2"	5.32
PT050605013007	1 1/4" x 3/4"	5.32
PT050605013010	1 1/4" x 1"	5.32
PT050605015005	1 1/2" x 1/2"	6.97
PT050605015007	1 1/2" x 3/4"	6.97
PT050605015010	1 1/2" x 1"	6.97
PT050605015013	1 1/2" x 1 1/4"	6.97
PT050605020005	2" x 1/2"	10.34
PT050605020007	2" x 3/4"	10.34
PT050605020010	2" x 1"	10.34
PT050605020013	2" x 1 1/4"	10.34
PT050605020015	2" x 1 1/2"	10.34

5177 Threaded Plug



Code	d	£ ea
PT051707003	3/8"	2.10
PT051707005	1/2"	2.21
PT051707007	3/4"	2.37
PT051707010	1"	3.22
PT051707013	1 1/4"	3.78
PT051707015	1 1/2"	5.74
PT051707020	2"	9.05

5047 90° Threaded Tee



Code	d	£ ea
PT050407005	1/2"	4.79
PT050407007	3/4"	5.24
PT050407010	1"	7.73
PT050407013	1 1/4"	11.23
PT050407015	1 1/2"	13.21
PT050407020	2"	14.43

5027 Reducing Bush



Code	d	£ ea
PT050207005003	1/2" x 3/8" (PVC)*	3.04
PT050207007003	3/4" x 3/8" (PVC)*	3.09
PT050207007005	3/4" x 1/2"	2.94
PT050207010005	1" x 1/2"	3.22
PT050207010007	1" x 3/4"	3.22
PT050207013005	1 1/4" x 1/2"	4.16
PT050207013007	1 1/4" x 3/4"	4.16
PT050207013010	1 1/4" x 1"	4.16
PT050207015005	1 1/2" x 1/2"	5.06
PT050207015007	1 1/2" x 3/4"	5.06
PT050207015010	1 1/2" x 1"	5.06
PT050207015013	1 1/2" x 1 1/4"	5.06
PT050207020005	2" x 1/2"	7.84
PT050207020007	2" x 3/4"	7.84
PT050207020010	2" x 1"	7.84
PT050207020013	2" x 1 1/4"	7.84
PT050207020015	2" x 1 1/2"	7.84
PT050207025020	2 1/2" x 2"	10.54
PT050207030010	3" x 1"	17.14
PT050207030013	3" x 1 1/4"	17.14
PT050207030015	3" x 1 1/2"	17.14
PT050207030020	3" x 2"	17.14
PT050207030025	3" x 2 1/2"	17.14
PT050207040020	4" x 2"	17.31
PT050207040030	4" x 3"	17.31

5057 90° Threaded Elbow



Code	d	£ ea
PT050507005	1/2"	3.61
PT050507007	3/4"	4.79
PT050507010	1"	5.95
PT050507013	1 1/4"	8.27
PT050507015	1 1/2"	9.49
PT050507020	2"	11.96

5157 Male/Female Threaded Elbow



Code	d	£ ea
PT051507005	1/2"	4.02
PT051507007	3/4"	4.96
PT051507010	1"	6.14

* PVC items PN10

5169 PP Tank Connector



Code	d	£ ea
PT0516V9005	1/2"	10.75
PT0516V9007	3/4"	12.74
PT0516V9010	1"	14.51
PT0516V9015	1 1/2"	22.81
PT0516V9020	2"	34.02

5168 PVC Tank Connector



Code	d	£ ea
PT05168200	25 x 3/4"	22.63
PT05168300	32 x 1"	33.01

5167 Threaded Riser



Code	d	£ ea
PT051607005	1/2"	4.16
PT051607007005	3/4" x 1/2"	5.49
PT051607007	3/4"	5.49
PT051607010	1"	8.91
PT051607013	1 1/4"	9.32
PT051607015013	1 1/2" x 1 1/4"	10.10
PT051607015	1 1/2"	10.10

5361 Male Hose Adaptor (PVC)



Code	d	£ ea
PT05361005	1/2"BSP x 20mm NB	3.64
PT05361007	3/4"BSP x 25mm NB	4.52
PT05361010	1"BSP x 30mm NB	4.79
PT05361020	2"BSP x 60mm NB	10.71

5362 Female Hose Adaptor (PVC)



Code	d	£ ea
PT05362007	3/4"FEM x 16mm NB	9.38
PT05362010	1"FEM x 20mm NB	9.38

Tools & accessories

7960 Chamfer Tool



Code	d	£ ea
PJ189600063020P	20-63	114.84

60125 Pipe Shears



Code	d	£ ea
PJ53000005	20-32	67.66
PJ53000001	20-63	162.68

60123 Pipe Squeeze Tool



Code	d	£ ea
PJ60121632	16-32	92.97
PJ60123263	32-63	156.10

60124 Water Valve Key

Universal



Code	d	£ ea
PJ60124		71.37



7990 Mechanical Wrench

for PLASSON mechanical fittings



Code	d	£ ea
PJ07990001	16-40	10.88
PJ07990005	40-75	68.38
PJ07990000	63-125	94.47

1099 Pushfit Wrench

for PLASSON pushfit fittings



Code	d	£ ea
PJ10990004P	20-32	41.56
PJ10990002P	40-63	71.75

7992 Strap Wrench

Universal



Code	d	£ ea
PJ792001	20-90	56.96

7991 Tapper Assembly Tool

for use with 16540 & 49630



See p19 & p43

Code	d	£ ea
PJ2920200		82.59

4363 Operating Key

for use with EF Ball Valve 43620



See p25

Code	d	£ ea
PJ4363		130.81

1247 EF Hand Scraper



Code	d	£ ea
PJ53002001	1 1/2"	54.73
PJ53002003	2 1/2"	78.75

6000 PTFE Tape



Code	d	£ ea
PJ07960040		1.67

F80 Silicone Grease Lubricant

(UK Water Reg4)



Code	d	£ ea
PJ8029030	30ml (tub)	12.90
PJ8030500	500ml (spray)	31.08

6101 Protective Tapes



Code	d	£ ea
PJAT500 (aluminium)	50 x 45m	37.59
PJPT50 (petrolatum)	50 x 10m	22.01

4899 EF Wipes Tub



Code	d	£ ea
PJ4899		46.71

4902A Marker Pen



Code	d	£ ea
PJF2040		12.33

60120 Pipe Clip

Metric Pushfix



Code	d	£ ea
PJ60120020	20	0.67
PJ60120025	25	0.70
PJ60120032	32	0.85
PJ60120050	50	1.50
PJ60120063	63	1.68

EF specialist tools

A full range of Specialist EF Tooling is available:

- Clamp kits for saddles and in line welding
- Squeeze off & re rounding tools
- Pipe cutting and core cutting equipment
- Manual and powered scrappers

For more information please contact your local account manager.



Electrofusion

PLASSON electrofusion fittings are specifically designed for reliable, high performance pipe joining and long system life. All fittings are BS EN 12201 and BS EN 1555 approved and are fitted with 4.0mm pins. PLASSON electrofusion fittings can be used with PLASSON's computerised SmartFuse System control box, Fusamatic control boxes, barcode reading and by manual control boxes.

490104 EF Coupler PN16



20mm up to 75mm

90mm up to 400mm

Code	d	£ ea
PF490104020	20	10.25
PF490104025	25	10.25
PF490104032	32	10.25
PF490104040	40	15.35
PF490104050	50	15.81
PF490104063	63	19.00
PF490104075	75	29.15
PF490104090	90	29.43
PF490104110	110	45.09
PF490104125	125	51.67
PF490104140	140	66.26
PF490104160N	160	80.78
PF490104180N	180	95.34
PF490104200N	200	135.27
PF490104225N	225	153.40
PF490104250	250	221.00
PF490104280	280	334.40
PF490104315	315	370.62
PF490104355	355	677.55
PF490103400	400	740.85
PF490103450	450	1,119.84
PF490103500	500	2,118.63
PF490103560	560	3,019.06
PF490103630N	630	4,736.67
PF490103710	710	6,446.70
PF490103800	800*	8,625.86
PF490103900	900*	12,301.74
PF4901031000	1000	22,007.65

4901L4 EF Long Coupler PN16



Code	d	£ ea
PF4901L4032	32	15.03
PF4901L4040	40	18.12
PF4901L4050	50	22.79
PF4901L4063	63	26.92

460104 EF LightFit Coupler PN10



Code	d	£ ea
PF460104040	40	15.35
PF460104050	50	15.81
PF460104063	63	17.67
PF460104075	75	26.80
PF460104090	90	28.92
PF460104110	110	37.06
PF460104125	125	46.28
PF460104140	140	49.83
PF460104160	160	54.41
PF460104180	180	76.26
PF460104200	200	98.56
PF460104225	225	126.41
PF460104250	250	175.66
PF460104280	280	255.38
PF460104315	315	290.51
PF460104355	355	411.30
PF460104400	400	567.17
PF460103450N	450	938.25
PF460103500	500	1,755.44
PF460103560N	560	2,512.09
PF460103630N	630	3,631.94
PF460103710N	710	4,956.09
PF460103800N	800*	6,204.57
PF460103900N	900*	7,868.44
PF4601031000	1000	17,874.59
PF4601031200	1200	24,348.01

4601S3 EF Super Lightfit Coupler PN6.4



Code	d	£ ea
PF4601S3500	500	1,302.43
PF4601S3560	560	1,747.61
PF4601S3630	630	2,371.80
PF4601S3710	710	3,227.65
PF4601S3800	800	4,034.58
PF4601S3900	900	6,583.50
PF4601S31000	1000	10,278.76

* PLASSON 800mm and 900mm PN16 and PN10 couplers are 42 volt fittings.

450104 EF Coupler PN25



Code	d	£ ea
PF450104050	50	20.26
PF450104063	63	21.55
PF450104090	90	39.16
PF450104110	110	52.59
PF450104125	125	62.52
PF450104160	160	92.91
PF450104180	180	109.62
PF450104200	200	155.57
PF450104250	250	254.17
PF450104280	280	384.57
PF450104315	315	426.21
PF450103355	355	681.13



491104 EF Reducing Coupler



25 x 20mm up to 110 x 90mm



125 x 90mm up to 180 x 125mm

Code	d x d1	£ ea
PF491104025020	25 x 20	10.30
PF491104032020	32 x 20	10.30
PF491104032025	32 x 25	12.03
PF491104040025	40 x 25	21.10
PF491104040032	40 x 32	21.10
PF491104050025	50 x 25	30.45
PF491104050032	50 x 32	30.45
PF491104050040	50 x 40	30.45
PF491104063032	63 x 32	30.37
PF491104063040	63 x 40	30.37
PF491104063050	63 x 50	30.37
PF491104075063	75 x 63	34.58
PF491104090050	90 x 50	39.06
PF491104090063	90 x 63	39.06
PF491104090075	90 x 75	39.06
PF491104110063	110 x 63	54.93
PF491104110090	110 x 90	54.93
PF491104125090	125 x 90	78.44
PF491104125110	125 x 110	85.69
PF491104160090	160 x 90	132.12
PF491104160110	160 x 110	132.12
PF491104160125	160 x 125	132.12
PF491104180125	180 x 125	144.68

491204 EF End Cap



20mm up to 75mm



90mm up to 315mm

Code	Size d	£ ea
PF491204020	20	18.21
PF491204025	25	19.49
PF491204032	32	21.34
PF491204040	40	24.81
PF491204050	50	36.29
PF491204063	63	41.05
PF491204075	75	74.99
PF491204090	90	84.51
PF491204110	110	121.44
PF491204125	125	136.32
PF491204140	140	155.86
PF491204160	160	205.44
PF491204180	180	268.32
PF491204200	200	326.26
PF491204225	225	343.62
PF491204250	250	412.83
PF491204315	315	930.45

490504 EF 90° Elbow



Code	d	£ ea
PF490504020	20	23.95
PF490504025	25	23.95
PF490504032	32	23.95
PF490504040	40	34.21
PF490504050	50	46.95
PF490504063	63	50.04
PF490504075	75	67.82
PF490504090	90	71.41
PF490504110	110	108.90
PF490504125	125	123.18
PF490504140	140	159.06
PF490504160	160	228.51
PF490504180	180	280.28
PF490504200	200	481.48
PF490504225	225	575.09
PF490504250	250	714.86

490604 EF 45° Elbow



Code	d	£ ea
PF490604032	32	22.81
PF490604040	40	32.40
PF490604050	50	37.44
PF490604063	63	49.95
PF490604075	75	67.69
PF490604090	90	74.72
PF490604110	110	110.45
PF490604125	125	123.93
PF490604140	140	159.06
PF490604160	160	228.33
PF490604180	180	281.48
PF490604200	200	481.48
PF490604225	225	575.09
PF490604250	250	714.86

490804 EF 22.5° Elbow

Code	Size d	£ ea
PF490804090	90	64.26
PF490804110	110	81.63
PF490804125	125	119.43
PF490804160	160	211.01
PF490804180	180	280.28

4947C4 EF Adjustable Elbow

Adjustment angle 0° to 24°



Code	d	£ ea
PF4947C4090	90	209.75
PF4947C4110	110	248.28
PF4947C4125	125	307.43
PF4947C4160	160	441.75
PF4947C4180	180	564.29
PF4947C4200	200	769.35
PF4947C4225	225	975.06
PF4947C4250	250	1,354.42

4947D4 EF Adjustable Elbow One Sided

Adjustment angle 0° to 12°



Code	d x D1	£ ea
PF4947D4090	90 x 90	194.77
PF4947D4110	110 x 110	211.67
PF4947D4125	125 x 125	245.41
PF4947D4160	160 x 160	381.45
PF4947D4180	180 x 180	455.03
PF4947D4200	200 x 200	610.95
PF4947D4225	225 x 225	774.32
PF4947D4250	250 x 250	1,075.55

491504 EF 90° Duck Foot Elbow



Code	d	£ ea
PF491504090	90	178.54

490904 EF 180° Elbow



Code	d	£ ea
PF490904025	25	57.82
PF490904032	32	69.71
PF490904040	40	86.72

492404 EF Two Outlet Tee



Code	d	£ ea
PF492404040025	40 x 25 x 25 x 40	62.52
PF492404040032	40 x 32 x 32 x 40	62.52
PF492404050025	50 x 25 x 25 x 50	74.00
PF492404050032	50 x 32 x 32 x 50	74.00
PF492404063025	63 x 25 x 25 x 63	88.64
PF492404063032	63 x 32 x 32 x 63	88.64
PF492404063040	63 x 40 x 40 x 63	88.64

490404 EF 90° Tee



20mm up to 75mm

90mm up to 250mm

Code	d	£ ea
PF490404020	20 x 20 x 20	22.50
PF490404025	25 x 25 x 25	22.26
PF490404032	32 x 32 x 32	23.95
PF490404040	40 x 40 x 40	37.11
PF490404050	50 x 50 x 50	45.27
PF490404063	63 x 63 x 63	50.85
PF490404075	75 x 75 x 75	76.55
PF490404090	90 x 90 x 90	87.75
PF490404110	110 x 110 x 110	131.23
PF490404125	125 x 125 x 125	168.76
PF490404160	160 x 160 x 160	278.58
PF490404180	180 x 180 x 180	312.00
PF490404200	200 x 200 x 200	579.54
PF490404225	225 x 225 x 225	658.56
PF490404250	250 x 250 x 250	871.83

499404 EF Flanged Tee



Code	d x d1	£ ea
PF499404090080	90 x 80 x 90	232.20
PF499404110080	110 x 80 x 110	263.08
PF499404110100	110 x 100 x 110	275.18
PF499404125080	125 x 80 x 125	286.81
PF499404125100	125 x 100 x 125	299.87
PF499404160080	160 x 80 x 160	459.98
PF499404160100	160 x 100 x 160	486.01
PF499404180080	180 x 80 x 180	560.96
PF499404180100	180 x 100 x 180	574.73
PF499404200080	200 x 80 x 200	1,251.71
PF499404200100	200 x 100 x 200	1,256.61
PF499404225080	225 x 80 x 225	1,363.30
PF499404225100	225 x 100 x 225	1,404.54
PF499404250080	250 x 80 x 250	1,762.65
PF499404250100	250 x 100 x 250	1,803.80

496304 EF Tapping Tee



40mm up to 63mm

90mm up to 180mm

200mm up to 250mm

Code	Size d x d1	£ ea
PF496304040032	40 x 32	80.33
PF496304050032	50 x 32	80.33
PF496304063032N	63 x 32	80.33
PF496304063063	63 x 63	127.72
PF496304090025	90 x 25	80.33
PF496304090032	90 x 32	80.33
PF496304090063	90 x 63	127.72

491404 EF Reducing Tee



20mm up to 75mm

90mm up to 250mm

Code	d	£ ea
PF491404025020	25 x 20 x 25	28.02
PF491404032020	32 x 20 x 32	31.66
PF491404032025	32 x 25 x 32	33.23
PF491404040025	40 x 25 x 40	35.21
PF491404040032	40 x 32 x 40	36.96
PF491404050020	50 x 20 x 50	40.36
PF491404050025	50 x 25 x 50	42.42
PF491404050032	50 x 32 x 50	42.42
PF491404063020	63 x 20 x 63	48.44
PF491404063032	63 x 32 x 63	48.44
PF491404063040	63 x 40 x 63	46.13
PF491404063050	63 x 50 x 63	48.44
PF491404075063	75 x 63 x 75	73.37
PF491404090063	90 x 63 x 90	98.37
PF491404110063	110 x 63 x 110	138.03
PF491404110090	110 x 90 x 110	138.03
PF491404125090	125 x 90 x 125	179.88
PF491404125110	125 x 110 x 125	179.88
PF491404160090	160 x 90 x 160	265.28
PF491404160110	160 x 110 x 160	252.62
PF491404160125	160 x 125 x 160	252.62
PF491404180090	180 x 90 x 180	512.35
PF491404180110	180 x 110 x 180	370.38
PF491404180125	180 x 125 x 180	512.35
PF491404180140	180 x 140 x 180	370.38
PF491404180160	180 x 160 x 180	512.35
PF491404200090	200 x 90 x 200	629.42
PF491404200110	200 x 110 x 200	651.61
PF491404200160	200 x 160 x 200	1,014.67
PF491404225090	225 x 90 x 225	715.13
PF491404225110	225 x 110 x 225	735.50
PF491404225160	225 x 160 x 225	1,211.60
PF491404250090	250 x 90 x 250	946.85
PF491404250110	250 x 110 x 250	972.95
PF491404250160	250 x 160 x 250	1,553.95

496304 EF Tapping Tee contd.

Code	Size d x d1	£ ea
PF496304110032	110 x 32	80.33
PF496304110063	110 x 63	127.72
PF496304125032	125 x 32	80.33
PF496304125063	125 x 63	127.72
PF496304160032	160 x 32	80.33
PF496304160063	160 x 63	127.72
PF496304180032	180 x 32	110.66
PF496304180063	180 x 63	127.72
PF496304200032	200 x 32	201.48
PF496304200063	200 x 63	201.48
PF496304225032	225 x 32	201.48
PF496304225063	225 x 63	201.48
PF496304250032	250 x 32	201.48
PF496304250063	250 x 63	253.87

7991 Tapper Assembly Tool for use with 496304
see page 38.



492104 EF Male Transition Coupler

(BSPT thread)



Code	Type	d x R	£ ea
PF492104020005	A	20 x 1/2"	46.60
PF492104025007	A	25 x 3/4"	48.05
PF492104032005	A	32 x 1/2"	48.05
PF492104032007	A	32 x 3/4"	48.05
PF492104032010N	B	32 x 1"	48.05
PF492104032013	A	32 x 1 1/4"	60.65
PF492104032015	A	32 x 1 1/2"	65.10
PF492104040010N	B	40 x 1"	57.92
PF492104040013N	B	40 x 1 1/4"	57.92
PF492104040015	A	40 x 1 1/2"	61.36
PF492104040020N	B	40 x 2"	83.25
PF492104050010	A	50 x 1"	65.71
PF492104050013	A	50 x 1 1/4"	67.41
PF492104050015N	B	50 x 1 1/2"	69.38
PF492104050020N	B	50 x 2"	86.64
PF492104063013	A	63 x 1 1/4"	100.71
PF492104063015	A	63 x 1 1/2"	92.93
PF492104063020N	B	63 x 2"	95.66
PF492104075020	A	75 x 2"	138.05
PF492104075025	A	75 x 2 1/2"	138.05

493104 EF Female Transition Coupler

(BSPT thread)



Code	Type	d x Rp	£ ea
PF493104020005	A	20 x 1/2"	42.90
PF493104025007	A	25 x 3/4"	49.86
PF493104032007	A	32 x 3/4"	56.01
PF493104032010N	B	32 x 1"	56.83
PF493104040010	A	40 x 1"	69.22
PF493104040013	A	40 x 1 1/4"	69.22
PF493104040015	A	40 x 1 1/2"	73.27
PF493104050015	A	50 x 1 1/2"	84.21
PF493104050020	A	50 x 2"	97.33
PF493104063015	A	63 x 1 1/2"	96.91
PF493104063020N	B	63 x 2"	106.01

494104 EF Female Free Nut Coupler

(BSPP thread)



Code	d x G	£ ea
PF494104025007	25 x 3/4"	61.09
PF494104032010	32 x 1"	71.85
PF494104050010	50 x 1"	99.54
PF494104063020	63 x 2"	126.60

492107 EF Weldable Transition

Male Adaptor

(BSPT thread)



Code	Type	d x R	£ ea
PF492107020005	A	20 x 1/2"	32.49
PF492107025007	A	25 x 3/4"	38.36
PF492107032007	A	32 x 3/4"	47.14
PF492107032010N	B	32 x 1"	47.14
PF492107040010	A	40 x 1"	60.57
PF492107040013	A	40 x 1 1/4"	59.10
PF492107040015	A	40 x 1 1/2"	63.82
PF492107050010	A	50 x 1"	67.73
PF492107050015N	B	50 x 1 1/2"	64.82
PF492107050020	A	50 x 2"	75.70
PF492107063015	A	63 x 1 1/2"	85.92
PF492107063020N	B	63 x 2"	84.17
PF492107075025	A	75 x 2 1/2"	121.02

493107 EF Weldable Transition

Female Adaptor

(BSPT thread)




Code	Type	d x Rp	£ ea
PF493107020005	A	20 x 1/2"	56.23
PF493107025007	A	25 x 3/4"	63.79
PF493107032007	A	32 x 3/4"	74.29
PF493107032010N	B	32 x 1"	83.09
PF493107040013	A	40 x 1 1/4"	73.89
PF493107050015	A	50 x 1 1/2"	117.78
PF493107050020	A	50 x 2"	117.78
PF493107063015	A	63 x 1 1/2"	118.33
PF493107063020N	B	63 x 2"	124.26

PLASSON® PA Threads

Coming soon, our high-performance glass reinforced PA (Polyamide) threaded fittings.

Providing a durable and robust connection for customers who favour plastic over metal threads with exceptional strength and resilience for every piping application.

- Corrosion resistant
- Fitting can be rotated even after assembly
- Durable, reliable, and lightweight
- PN16 pressure rating

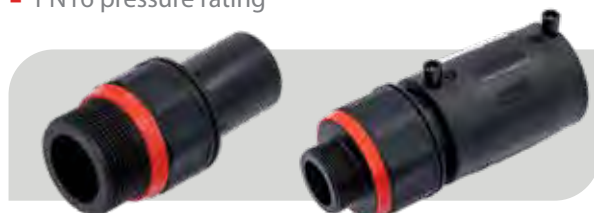

Specialist EF Saddles

PLASSON saddles are uniquely designed to allow cost effective connections and branches from large diameter PE pipework. Simple and easy to install with confidence and suitable for a large range of SDR Pipes, (please check website for suitability at each size) manufactured to BS EN12201 and EN1555 makes them the perfect solution for both water and gas applications.

Simple Clamping Systems

Our unique clamping systems have been engineered to ensure PLASSON saddles are quick and easy to use.

Our OneBolt system for saddles to suit pipes up to 315mm remove the need for any specialist equipment.

Our LD and XL saddles use a unique and simple clamping system. Simply pick the correct saddle plate and attach this to the tension straps around the pipework. Tighten until the indicators touch, signals that the saddle is secured and ready for electrofusion.

Embedded heating wires ensure large weld zone

All PLASSON saddles are designed with large weld zones to give confidence to the installer. The embedded wires overlap the cut out area to ensure the maximum surface weld area is created.

Built-in test point

Each saddle has an injection moulded test point built into the body of the outlet. The test point provides a quick and simple way to test weld integrity of the saddle prior to drilling.

The connection to a standard pressure test pump is by 16mm push-fit fitting. Ensure 3x cooling period prior to testing and drilling.

Maximum Bore

The full bore of the saddle is opened by using the PLASSON core drill. All saddles can be welded in place on pressurised (live) or de-pressurised mains (dead).



Quality & Approvals

Pressure rated PN16 (water), PE100 SDR11 (gas).
PLASSON EF fittings are suitable for pipelines SDR7.4 to SDR41.
(Please check individual fitting for suitability)

PLASSON Electrofusion fittings are certified to EN 1555 and EN 12201, and meet with Water Supply (Water Fittings) Regulations 1999, section 4.



Underclamp Saddles (UC)

4958 Underclamp Spigot Saddles

Pipe size 63mm - 250mm

Spigot outlet up to 90mm



Code	Type	d x d1	ea
PF495804063032	UC	63 x 32	88.70
PF495804090032	UC	90 x 32	88.70
PF495804110032	UC	110 x 32	88.70
PF495804125032	UC	125 x 32	98.02
PF495804140032	UC	140 x 32	123.50
PF495804160032	UC	160 x 32	137.64
PF495804180032	UC	180 x 32	121.73
PF495804110040	UC	110 x 40	88.70
PF495804110050	UC	110 x 50	88.70
PF495804125050	UC	125 x 50	98.02
PF495804140050	UC	140 x 50	123.50
PF495804160050	UC	160 x 50	137.64
PF495804180050	UC	180 x 50	123.01
PF495804063063	UC	63 x 63	88.70
PF495804090063	UC	90 x 63	88.70
PF495804110063	UC	110 x 63	90.17
PF495804125063	UC	125 x 63	98.02
PF495804140063	UC	140 x 63	123.50
PF495804160063	UC	160 x 63	108.98
PF495804180063	UC	180 x 63	121.73
PF495804200063	UC	200 x 63	132.45
PF495804225063	UC	225 x 63	132.45
PF495804250063	UC	250 x 63	135.67
PF495804090090	UC	90 x 90	129.12
PF495804110090	UC	110 x 90	129.12

493804 EF Transition Saddles

Pipe size 63mm - 800mm

Threaded outlets 1 1/4" to 2"



Type UC

63mm up to 180mm
Outlets 1 1/4" and 1 1/2"



Type UC

90mm up to 250mm
Outlet 2"



Type M

Multi 2"

Code	Type	d x G	£ ea
PF493804063013	UC	63 x 1 1/4"	97.96
PF493804090015	UC	90 x 1 1/2"	129.67
PF493804090020	UC	90 x 2"	155.98
PF493804110015	UC	110 x 1 1/2"	137.27
PF493804110020	UC	110 x 2"	172.32
PF493804125015	UC	125 x 1 1/2"	180.07
PF493804125020	UC	125 x 2"	184.06
PF493804160020	UC	160 x 2"	205.30
PF493804180020	UC	180 x 2"	178.39
PF493804200020	UC	200 x 2"	226.04
PF493804225020	UC	225 x 2"	252.08
PF493804250020	UC	250 x 2"	233.01
PF493804400020	M	280-400 x 2"	581.48
PF493804710020	M	450-800 x 2"	644.51

Sensor Saddles

Sensor saddle provides a simple and reliable solution for providing a through wall connection into PE pipes.

- Designed for instrumentation connections
- Permanent welded fixing
- PN16 pressure rating
- Suitable for SDR7.4 to SDR26 pipes.
- Brass and stainless versions available
- Can be installed on live pipework

4938 Sensor Saddles



Brass thread

Stainless thread

Code	Type	d x Rp**	Voltage	£ ea
PF493803400005	Brass	110-400 x 1/2"	30v	256.86
PF4938S3400005	S'steel	110-400 x 1/2"	30v	297.28
PF493803900005	Brass	450-1200 x 1/2"	31v	460.38
PF4938S3900005	S'steel	450-1200 x 1/2"	31v	502.11
PF493803400007	Brass	110-400 x 3/4"	31v	271.85
PF4938S3400007	S'steel	110-400 x 3/4"	31v	306.41
PF493803900007	Brass	450-1200 x 3/4"	30v	480.76
PF4938S3900007	S'steel	450-1200 x 3/4"	30v	516.58
PF493803400010	Brass	110-400 x 1"	30v	295.30
PF4938S3400010	S'steel	110-400 x 1"	30v	335.95
PF493803900010	Brass	450-1200 x 1"	31v	506.26
PF4938S3900010	S'steel	450-1200 x 1"	31v	548.30



One Bolt Saddles (OB)

Available for all pipe sizes from 125mm - 250mm with an range of spigot outlets 90mm - 160mm and flanged outlets from 80mm - 150mm with PN16 coated backing rings.

Large Diameter Saddles (LD)

Available for all pipe sizes from 280mm - 1200mm with an range of spigot outlets 90mm - 160mm and flanged outlets from 80mm - 150mm with PN16 coated backing rings. Pipe sizes 280mm - 400mm and 450mm - 800mm use multi-size type saddle. Pipe sizes 900mm - 1200mm use dedicated type saddle. LD saddles require a PLASSON LD fitting kit to be used for installation.



Outlets 90-160mm spigot & 80-150mm flanged

4958 Spigot Saddles

90mm Spigot (di 73mm)

Code	Type	d x d1	£ ea
PF4958X4125090T	OB	125 x 90	346.86
PF4958X4140090T	OB	140 x 90	357.79
PF4958X4160090T	OB	160 x 90	376.57
PF4958X4180090T	OB	180 x 90	396.43
PF4958X4200090T	OB	200 x 90	479.50
PF4958X4225090T	OB	225 x 90	519.43
PF4958X4250090T	OB	250 x 90	559.86
PF495804280090	UC	280 x 90	313.21
PF495804315090	UC	315 x 90	406.43
PF495804400090T	M LD	280-400 x 90	552.21
PF495804710090T	M LD	450-800 x 90	599.43

110mm Spigot (di 89mm)

Code	Type	d x d1	£ ea
PF4958X4125110T	OB	125 x 110	365.71
PF4958X4140110T	OB	140 x 110	376.71
PF4958X4160110T	OB	160 x 110	395.64
PF4958X4180110T	OB	180 x 110	415.43
PF4958X4200110T	OB	200 x 110	498.43
PF4958X4225110T	OB	225 x 110	538.29
PF4958X4250110T	OB	250 x 110	559.86
PF495804400110T	M LD	280-400 x 110	685.93
PF495804710110T	M LD	450-800 x 110	753.50
PF495803900110T	LD	900 x 110	4,673.57
PF4958031000110T	LD	1000 x 110	6,075.64
PF4958031200110T	LD	1200 x 110	6,987.00

125mm Spigot (di 102mm)

Code	Type	d x d1	£ ea
PF495804400125T	M LD	280-400 x 125	831.29
PF495804710125T	M LD	450-800 x 125	871.36
PF495803900125T	LD	900 x 125	4,797.79
PF4958031000125T	LD	1000 x 125	6,379.43
PF4958031200125T	LD	1200 x 125	7,336.29

160mm Spigot (di 131mm)

Code	Type	d x d1	£ ea
PF4958X4225160T	OB	225 x 160	629.79
PF4958X4250160T	OB	250 x 160	638.21
PF495804400160T	M LD	280-400 x 160	1,596.07
PF495804710160T	M LD	450-800 x 160	1,764.43
PF495803900160T	LD	900 x 160	5,037.71
PF4958031000160T	LD	1000 x 160	6,698.43
PF4958031200160T	LD	1200 x 160	7,703.29

4959 Flanged Saddles

80mm Flange (di 73mm)

Code	Type	d x DN	£ ea
PF4959X4125080T	OB	125 x 80	635.57
PF4959X4160080T	OB	160 x 80	665.29
PF4959X4180080T	OB	180 x 80	685.14
PF4959X4200080T	OB	200 x 80	768.21
PF4959X4225080T	OB	225 x 80	808.14
PF4959X4250080T	OB	250 x 80	847.81
PF495904400080T	M LD	280-400 x 80	847.81
PF495904710080T	M LD	450-800 x 80	888.14

100mm Flange (di 89mm)

Code	Type	d x DN	£ ea
PF4959X4125100T	OB	125 x 100	767.29
PF4959X4160100T	OB	160 x 100	797.21
PF4959X4180100T	OB	180 x 100	817.00
PF4959X4200100T	OB	200 x 100	900.00
PF4959X4225100T	OB	225 x 100	939.86
PF4959X4250100T	OB	250 x 100	1,023.00
	Made with 125mm spigot saddle		

100mm Flange (di 102mm)

Code	Type	d x DN	£ ea
PF495904400100T	M LD	280-400 x 100	1,087.50
PF495904710100T	M LD	450-800 x 100	1,155.07
PF495903900100T	LD	900 x 100	5,075.14
PF4959031000100T	LD	1000 x 100	6,665.14
PF4959031200100T	LD	1200 x 100	7,622.00

150mm Flange (di 131mm)

Code	Type	d x DN	£ ea
PF4959X4225150T	OB	225 x 150	1,057.14
PF4959X4250150T	OB	250 x 150	1,057.14
PF495904400150T	M LD	280-400 x 150	2,023.43
PF495904710150T	M LD	450-800 x 150	2,191.79
PF495903900150T	LD	900 x 150	5,465.07
PF4959031000150T	LD	1000 x 150	7,125.79
PF4959031200150T	LD	1200 x 150	8,130.64

XL Diameter Saddles (XL)

Available for all pipe sizes from 400mm to 1200mm with an range of spigot outlets 180mm - 400mm and flanged outlets from 200mm - 400mm with PN16 coated backing rings.

XL saddles require a PLASSON XL strap set, the appropriate sized clamp plate, rounding ring and/or pressing tool to be used for installation.

PLASSON saddles are suitable for gas and water applications drilling both under pressure and dead.



4958 Spigot Saddles

180mm Spigot (di 147mm)

Code	Type	d x d1	£ ea
PF495803400180T	XL	400 x 180	3,395.96
PF495803450180T	XL	450 x 180	5,131.68
PF495803500180T	XL	500 x 180	6,291.14
PF495803560180T	XL	560 x 180	6,579.00
PF495803630180T	XL	630 x 180	6,579.00
PF495803710180T	XL	710 x 180	7,648.07
PF495803800180T	XL	800 x 180	9,251.71
PF495803900180T	XL	900 x 180	9,457.29
PF4958031000180T	XL	1000 x 180	10,855.36
PF4958031200180T	XL	1200 x 180	12,500.07

225mm Spigot (di 184mm)

Code	Type	d x d1	£ ea
PF495803450225TN	M XL	400-450 x 225	3,476.29
PF495803630225TN	M XL	500-630 x 225	3,748.86
PF495803710225T	XL	710 x 225	8,733.57
PF495803800225T	XL	800 x 225	9,251.71
PF495803900225T	XL	900 x 225	9,457.29
PF4958031000225T	XL	1000 x 225	10,855.36
PF4958031200225T	XL	1200 x 225	12,500.07

280mm Spigot (di 230mm)

Code	Type	d x d1	£ ea
PF495803450280T	XL	450 x 280	7,565.86
PF495803500280T	XL	500 x 280	7,161.07
PF495803560280T	XL	560 x 280	8,178.57
PF495803630280T	XL	630 x 280	8,178.57
PF495803710280T	XL	710 x 280	9,475.93
PF495803800280T	XL	800 x 280	10,038.14
PF495803900280T	XL	900 x 280	7,293.86
PF4958031000280T	XL	1000 x 280	8,387.93
PF4958031200280T	XL	1200 x 280	9,646.07

355mm Spigot (di 292mm)

Code	Type	d x d1	£ ea
PF495803500355T	XL	500 x 355	10,952.36
PF495803560355T	XL	560 x 355	13,158.00
PF495803630355T	XL	630 x 355	13,158.00
PF495803710355T	XL	710 x 355	13,078.29
PF495803800355T	XL	800 x 355	13,766.57
PF495803900355T	XL	900 x 355	15,143.21
PF4958031000355T	XL	1000 x 355	17,414.71
PF4958031200355T	XL	1200 x 355	20,026.93

200mm Spigot (di 164mm)

Code	Type	d x d1	£ ea
PF495803450200TN	M XL	400-450 x 200	3,157.50
PF495803630200TN	M XL	500-630 x 200	3,718.00
PF495803710200T	XL	710 x 200	8,733.57
PF495803800200T	XL	800 x 200	9,251.71
PF495803900200T	XL	900 x 200	9,457.29
PF4958031000200T	XL	1000 x 200	10,855.36
PF4958031200200T	XL	1200 x 200	12,500.07

250mm Spigot (di 205mm)

Code	Type	d x d1	£ ea
PF495803355250T	M XL	315-355 x 250	2,664.50
PF495803450250TN	M XL	400-450 x 250	3,673.16
PF495803630250T	M XL	500-630 x 250	3,768.36
PF495803710250T	XL	710 x 250	8,733.57
PF495803800250T	XL	800 x 250	9,251.71
PF495803900250T	XL	900 x 250	6,722.36
PF4958031000250T	XL	1000 x 250	7,730.79
PF4958031200250T	XL	1200 x 250	8,890.43

315mm Spigot (di 259mm)

Code	Type	d x d1	£ ea
PF495803450315T	XL	450 x 315	7,977.07
PF495803500315T	XL	500 x 315	8,424.86
PF495803560315T	XL	560 x 315	9,621.79
PF495803630315T	XL	630 x 315	9,621.79
PF495803710315T	XL	710 x 315	10,065.86
PF495803800315T	XL	800 x 315	10,583.93
PF495803900315T	XL	900 x 315	11,842.21
PF4958031000315T	XL	1000 x 315	13,618.50
PF4958031200315T	XL	1200 x 315	15,661.29

400mm Spigot (di 329mm)

Code	Type	d x d1	£ ea
PF495803560400T	XL	560 x 400	13,980.43
PF495803630400T	XL	630 x 400	13,980.43
PF495803710400T	XL	710 x 400	14,062.57
PF495803800400T	XL	800 x 400	14,802.79
PF495803900400T	XL	900 x 400	16,283.07
PF4958031000400T	XL	1000 x 400	18,725.43
PF4958031200400T	XL	1200 x 400	21,534.29

4959 Flanged Saddles

200mm Flange (di 184mm)

Code	Type	d x DN	£ ea
PF495903450200TN	M XL	400-450 x 200	3,594.29
PF495903630200TN	M XL	500-630 x 200	4,154.79
PF495903710200T	XL	710 x 200	9,170.36
PF495903800200T	XL	800 x 200	9,688.50
PF495903900200T	XL	900 x 200	9,894.07
PF4959031000200T	XL	1000 x 200	11,292.14
PF4959031200200T	XL	1200 x 200	12,936.86

300mm Flange (di 257mm)

Code	Type	d x DN	£ ea
PF495903355300T	M XL	315-355 x 300	4,998.00
PF495903450300T	XL	450 x 300	8,758.00
PF495903500300T	XL	500 x 300	9,205.79
PF495903560300T	XL	560 x 300	10,402.71
PF495903630300T	XL	630 x 300	10,402.71
PF495903710300T	XL	710 x 300	10,846.79
PF495903800300T	XL	800 x 300	11,364.86
PF495903900300T	XL	900 x 300	12,623.14
PF4959031000300T	XL	1000 x 300	14,399.43
PF4959031200300T	XL	1200 x 300	16,442.21

250mm Flange (di 204mm)

Code	Type	d x DN	£ ea
PF495903355250T	M XL	315-355 x 250	3,376.14
PF495903450250TN	M XL	400-450 x 250	4,303.85
PF495903630250T	M XL	500-630 x 250	4,480.00
PF495903710250T	XL	710 x 250	9,445.21
PF495903800250T	XL	800 x 250	9,963.36
PF495903900250T	XL	900 x 250	7,434.00
PF4959031000250T	XL	1000 x 250	8,442.43
PF4959031200250T	XL	1200 x 250	9,602.07

400mm Flange (di 327mm)

Code	Type	d x DN	£ ea
PF495903560400T	XL	560 x 400	15,724.50
PF495903630400T	XL	630 x 400	15,760.93
PF495903710400T	XL	710 x 400	15,806.64
PF495903800400T	XL	800 x 400	16,777.14
PF495903900400T	XL	900 x 400	18,027.14
PF4959031000400T	XL	1000 x 400	20,461.29
PF4959031200400T	XL	1200 x 400	23,016.93



Flex Restraint

The restraint is a flexible bar, which is fused to the pipe by electrofusion to create a welded shoulder that can restrain the axial movement of pipes in various applications:

- Anchoring the pipe to a concrete wall such as a manhole or tank.
- Blocking pipe movement after slip-lining.

49009 EF Flex Restraint



Code	Size	£ ea
PF49009999	140-1600	242.97
PF49009998	160-1600	257.50

Repair Saddle

The repair saddle is a simple and efficient way to repair PE pipework. The repair saddle fits all 250mm to 900mm pipe.

The saddle can cover and repair damaged lengths of 70mm & 230mm. Suitable for PE pipes with a wall thickness of 14.7mm and above.

4952 Repair Saddle



Repair Saddle	Type	d	Damage length	£ ea
PF495204900070	R	250 - 900	70	1,613.07
PF4952039000230	R	400 - 900	230	3,168.40

Spigot fittings

Long Spigot Fittings

PE100 Fittings with long spigots SDR11/17 black

Injection moulded, for butt-welding and electrofusion socket welding.

Material

PE100, black, UK Water Reg4 approved.

Geometric Properties

Outside diameter and wall thickness according to EN 1555 and EN 12201.

Tolerances of z-sizes depend on the dimension. Up to d/D 160 = +/- 3 mm and from d/D 180 = +/- 10 mm.

Type

Suitable for butt-welding and electrofusion socket welding.



Stub Flange Adaptor Long

*	SDR11 code	D (mm)	£ ea
*	PS233307F015	25	4.72
*	PS233308F015	32	4.81
*	PS233309F015	40	6.56
*	PS233310F015	50	7.08
*	PS233311F015	63	8.31
*	PS233312F015	75	10.48
*	PS233313F015	90	13.81
*	PS233314F015	110	17.29
*	PS233315F015	125	21.32
*	PS233316F015	140	27.43
*	PS233317F015	160	30.58
*	PS233318F015	180	48.24
*	PS233319F015	200	55.13
*	PS233320F015	225	59.24
*	PS233321F015	250	124.67
*	PS233322F015	280	164.23
*	PS233323F015	315	207.52
*	PS233324F015	355	347.09
	PS233325F015	400	822.58
	PS233326F015	450	1,471.94
	PS233327F015	500	1,667.74
	PS233328F035	560	2,113.63
	PS233329F015	630	3,140.62

*	SDR17 code	D (mm)	£ ea
*	PS233411F015	63	8.48
*	PS233412F015	75	10.66
*	PS233413F015	90	13.81
*	PS233414F015	110	17.13
*	PS233415F015	125	21.32
*	PS233416F015	140	27.61
*	PS233417F015	160	30.92
*	PS233418F015	180	48.58
*	PS233419F015	200	54.69
*	PS233420F015	225	59.24
*	PS233421F015	250	94.70
*	PS233422F015	280	148.25
*	PS233423F015	315	193.74
*	PS233424F015	355	295.91
	PS233425F015	400	522.02
*	PS233426F015	450	1,366.49
	PS233427F015	500	1,386.33
	PS233428F035	560	1,594.87
	PS233429F015	630	1,906.42

490209 Full Face Flange

90 SDR11

*	Code	d	£ ea
*	PF490209090	90	70.97




Backing Rings:

The galvanised backing rings 63mm to 315mm have been replaced by epoxy coated as shown below. Please note, new codes for the complete range.



Backing Rings PN10/16 32-315

- Epoxy Coated



*	PN10/16 Code	D (mm)	£ ea
*	PS60030100	D32 DN25 (Galv)	25.60
*	PS60050100	D50 DN40 (Galv)	28.61
*	PS60050100DFE	D63 DN50	29.40
*	PS60070100DFE	D75 DN65	38.75
*	PS60080100DFE	D90 DN80	43.69
*	PS60110100DFE	D110 DN100	46.04
*	PS60120100DFE	D125 DN100	46.04
*	PS60140100DFE	D140 DN125	75.89
*	PS60160100DFE	D160 DN150	78.53
*	PS60180100DFE	D180 DN150	78.53
*	PS60200100DFE	D200 DN200	127.53
*	PS60220100DFE	D225 DN200	127.53
*	PS60250100DFE	D250 DN250	221.79
*	PS60280100DFE	D280 DN250	221.79
*	PS60300100DFE	D315 DN300	360.76

- Black epoxy coated DI backing rings
- For use on PE flanges
- Drilled to ISO/DIN 2501
- Drilled PN 16 EN1092



Backing Rings PN10/16 20-180

- Polypropylene Encapsulated

*	PN10/16 code	D (mm)	£ ea
	PS914106E135	D20 DN15	32.36
	PS914107E115	D25 DN20	22.12
*	PS914108E115	D32 DN25	30.38
*	PS914109E115	D40 DN32	33.37
*	PS914110E115	D50 DN40	38.57
*	PS914111E115	D63 DN50	40.06
*	PS914112E115	D75 DN65	45.18
*	PS914313E115	D90 DN80	48.25
*	PS914314E115	D110 DN100	58.01
*	PS914315E115	D125 DN100	58.01
*	PS914316E115	D140 DN125	73.27
*	PS914317E115	D160 DN150	90.19
*	PS914318E115	D180 DN150	90.19

Backing Rings PN16 200-400

- Polypropylene Encapsulated

*	PN16 code	D (mm)	£ ea
*	PS914319E325	D200 DN200	172.61
*	PS914320E325	D225 DN200	172.61
*	PS914321E325	D250 DN250	243.33
*	PS914322E325	D280 DN250	262.20
*	PS914323E325	D315 DN300	309.64
	PS914324E325	D355 DN350	612.37
	PS914325E325	D400 DN400	720.32


Backing Rings PN10 200-630

- Polypropylene Encapsulated

*	PN10 code	D (mm)	£ ea
	PS914319E215	D200 DN200	126.40
*	PS914320E215	D225 DN200	129.64
	PS914321E215	D250 DN250	207.71
	PS914322E215	D280 DN250	195.67
	PS914323E215	D315 DN300	258.08
	PS914324E215	D355 DN350	540.65
	PS914325E215	D400 DN400	604.70
	PS914326E235	D450 DN500	1,596.99
	PS914327E235	D500 DN500	1,596.99
	PS914328E235	D560 DN600	2,740.13
	PS914329E235	D630 DN600	2,740.13

Blind flange PN10/16 25-180

- Polypropylene Encapsulated



*	PN10/16 code	D (mm)	£ ea
	PS914407E135	25	185.36
	PS914408E135	32	190.08
	PS914409E135	40	196.21
	PS914410E135	50	230.62
	PS914411E135	63	259.97
	PS914412E135	75	293.03
	PS914413E135	90	317.43
	PS914414E135	110/125	400.31
	PS914416E135	140	530.10
	PS914417E135	160/180	717.27

Blind flange PN10 200-400

- Polypropylene Encapsulated

*	PN10 code	D (mm)	£ ea
	PS914419E235	200/225	760.72
	PS914421E235	250/280	973.85
	PS914423E235	315	1,410.29
	PS914424E235	355	2,922.35
	PS914425E235	400	3,211.52

* Stocked item

Spigot Reducer Long



*	SDR11 code	D (mm)	£ ea
*	PS2323080715	32-25	3.40
	PS2323090635	40-20	18.81
	PS2323090715	40-25	4.95
	PS2323090815	40-32	4.75
*	PS2323100715	50-25	6.29
*	PS2323100815	50-32	6.13
*	PS2323100915	50-40	5.97
*	PS2323110735	63-25	16.15
*	PS2323110815	63-32	8.92
*	PS2323110915	63-40	8.92
*	PS2323111015	63-50	8.92
	PS2323120915	75-40	15.03
*	PS2323121015	75-50	15.03
*	PS2323121115	75-63	15.03
*	PS2323131015	90-50	20.70
*	PS2323131115	90-63	20.70
*	PS2323131215	90-75	20.70
	PS2323141035	110-50	25.73
*	PS2323141115	110-63	26.20
*	PS2323141215	110-75	27.52
*	PS2323141315	110-90	27.52
*	PS2323151115	125-63	31.63
	PS2323151215	125-75	33.21
*	PS2323151315	125-90	33.21
*	PS2323151415	125-110	33.21
	PS2323161215	140-75	50.23
*	PS2323161315	140-90	50.23
*	PS2323161415	140-110	50.23
*	PS2323161515	140-125	47.86
*	PS2323171315	160-90	57.22
*	PS2323171415	160-110	63.87
*	PS2323171515	160-125	63.87
*	PS2323171615	160-140	63.87
*	PS2323181335	180-90	75.16
	PS2323181415	180-110	75.16
*	PS2323181515	180-125	63.83
	PS2323181635	180-140	81.62
*	PS2323181715	180-160	77.84
	PS2323191435	200-110	129.09
	PS2323191515	200-125	95.07
*	PS2323191715	200-160	90.44
*	PS2323191835	200-180	129.09
*	PS2323201335	225-90	288.23
	PS2323201415	225-110	119.67
	PS2323201535	225-125	287.44
*	PS2323201715	225-160	134.88
*	PS2323201815	225-180	134.88
*	PS2323201935	225-200	195.25
*	PS2323211715	250-160	228.72
*	PS2323211815	250-180	231.57
*	PS2323211915	250-200	231.57
*	PS2323212015	250-225	231.57
	PS2323221815	280-180	317.03
	PS2323221915	280-200	287.93
	PS2323222015	280-225	337.29
	PS2323222115	280-250	352.09

[illegible]

* Stocked item

Spigot Reducer Long



*	SDR11 code	D (mm)	£ ea
	PS2323232015	315-225	412.20
	PS2323232115	315-250	422.83
	PS2323232215	315-280	422.83
*	PS2323242115	355-250	455.73
	PS2323242215	355-280	780.15
*	PS2323242315	355-315	736.56
	PS2323252215	400-280	1,102.52
	PS2323252315	400-315	1,120.92
	PS2323252415	400-355	1,094.31
	PS2323262315	450-315	1,592.20
	PS2323262415	450-355	2,087.48
	PS2323262515	450-400	2,077.31
	PS2323272415	500-355	2,077.31
	PS2323272515	500-400	2,855.27
	PS2323272615	500-450	2,548.43
	PS2323292415	630-355	3,436.90
	PS2323292515	630-400	3,648.67
	PS2323292615	630-450	3,648.67
	PS2323292715	630-500	3,436.87

*	SDR17 code	D (mm)	£ ea
*	PS2324232015	315-225	359.79
*	PS2324232115	315-250	456.74
*	PS2324232215	315-280	502.35
*	PS2324242115	355-250	678.62
	PS2324242215	355-280	730.49
*	PS2324242315	355-315	702.61
	PS2324252215	400-280	907.90
	PS2324252315	400-315	953.71
*	PS2324252415	400-355	1,068.31
*	PS2324262315	450-315	1,728.71
*	PS2324262415	450-355	1,527.44
	PS2324262515	450-400	1,604.81
	PS2324272415	500-355	2,242.70
	PS2324272515	500-400	1,981.32
	PS2324272615	500-450	1,779.28
	PS2324292415	630-355	3,393.03
	PS2324292515	630-400	3,393.03
	PS2324292615	630-450	3,393.03
	PS2324292715	630-500	3,162.59

Spigot End Cap Long



*	SDR11 code	D (mm)	£ ea
	PS2443070015	25	4.48
*	PS2443080015	32	4.48
	PS2443090015	40	5.09
*	PS2443100015	50	6.23
*	PS2443110015	63	11.00
*	PS2443120015	75	22.08
*	PS2443130015	90	26.82
*	PS2443140015	110	35.38
*	PS2443150015	125	41.49
*	PS2443160015	140	54.42
*	PS2443170015	160	57.41
*	PS2443180015	180	78.89
*	PS2443190015	200	98.55
*	PS2443200015	225	118.11
	PS2443210015	250	164.97
*	PS2443220015	280	233.71
	PS2443230015	315	317.36
	PS2443240015	355	467.39
	PS2443250015	400	824.96
	PS2443260015	450	1,151.11
	PS2443270015	500	1,489.72
	PS2443290015	630	2,759.11

*	SDR17 code	D (mm)	£ ea
*	PS2444110015	63	10.40
	PS2444120015	75	20.70
	PS2444130015	90	23.42
*	PS2444140015	110	31.57
	PS2444150015	125	37.54
	PS2444160015	140	46.76
*	PS2444170015	160	51.19
	PS2444180015	180	70.59
	PS2444190015	200	87.98
	PS2444200015	225	105.02
*	PS2444210015	250	142.08
	PS2444220015	280	221.13
*	PS2444230015	315	295.91
*	PS2444240015	355	467.39
	PS2444250015	400	731.75
	PS2444260015	450	766.94
	PS2444270015	500	1,102.46
	PS2444290015	630	2,177.60

* Stocked item

Spigot Elbow 90 Long



*	SDR11 code	D (mm)	£ ea
	PS2413079015	25	4.49
*	PS2413089015	32	4.49
*	PS2413099015	40	5.12
*	PS2413109015	50	9.17
*	PS2413119015	63	15.03
*	PS2413129015	75	22.01
*	PS2413139015	90	23.67
*	PS2413149015	110	39.75
	PS2413159015	125	60.12
	PS2413169015	140	68.65
*	PS2413179015	160	82.18
*	PS2413189015	180	134.79
	PS2413199015	200	153.57
*	PS2413209015	225	203.95
*	PS2413219015	250	342.97
*	PS2413229015	280	551.78
*	PS2413239015	315	694.54
	PS2413249015	355	1,450.59
	PS2413259015	400	2,059.79
	PS2413269015	450	3,120.00
	PS2413279015	500	4,068.42

*	SDR17 code	D (mm)	£ ea
	PS2414119015	63	14.80
	PS2414129015	75	21.33
*	PS2414139015	90	23.86
	PS2414149015	110	39.03
	PS2414159015	125	56.28
	PS2414169015	140	69.29
*	PS2414179015	160	84.04
*	PS2414189015	180	100.45
	PS2414199015	200	138.75
*	PS2414209015	225	157.34
*	PS2414219015	250	292.88
*	PS2414229015	280	442.51
*	PS2414239015	315	553.49
*	PS2414249015	355	1,089.79
	PS2414259015	400	1,461.22
	PS2414269015	450	2,215.32
	PS2414279015	500	3,085.12

Spigot Elbow 45 Long



*	SDR11 code	D (mm)	£ ea
	PS2413074515	25	4.48
*	PS2413084515	32	4.48
*	PS2413094515	40	5.12
	PS2413104515	50	9.17
*	PS2413114515	63	15.27
*	PS2413124515	75	22.63
*	PS2413134515	90	23.71
	PS2413144515	110	39.75
	PS2413154515	125	60.12
	PS2413164515	140	66.06
	PS2413174515	160	87.98
*	PS2413184515	180	105.82
	PS2413194515	200	137.50
	PS2413204515	225	166.91
*	PS2413214515	250	341.56
*	PS2413224515	280	521.40
	PS2413234515	315	645.94
	PS2413244515	355	1,089.79
	PS2413254515	400	1,461.22
	PS2413264515	450	2,215.32
	PS2413274515	500	2,940.14

*	SDR17 code	D (mm)	£ ea
	PS2414114515	63	14.25
	PS2414124515	75	23.30
*	PS2414134515	90	23.08
	PS2414144515	110	38.96
	PS2414154515	125	53.56
	PS2414164515	140	65.62
*	PS2414174515	160	83.17
	PS2414184515	180	90.97
	PS2414194515	200	124.58
	PS2414204515	225	149.35
*	PS2414214515	250	279.65
	PS2414224515	280	431.48
*	PS2414234515	315	553.49
*	PS2414244515	355	521.27
	PS2414254515	400	646.62
	PS2414264515	450	1,532.53
	PS2414274515	500	2,003.52

* Stocked item

Spigot Elbow 30 Long



*	SDR11 code	D (mm)	£ ea
	PS2413123015	75	29.60
	PS2413133015	90	42.19
	PS2413143015	110	63.44
	PS2413153015	125	104.53
	PS2413163015	140	113.27
	PS2413173015	160	120.02
	PS2413183015	180	172.91
	PS2413193015	200	227.85
	PS2413203015	225	289.49

*	SDR17 code	D (mm)	£ ea
	PS2414123015	75	34.25
	PS2414133015	90	43.62
	PS2414143015	110	56.43
	PS2414153015	125	88.39
	PS2414163015	140	114.46
	PS2414173015	160	128.21
	PS2414183015	180	144.91
	PS2414193015	200	174.43
	PS2414203015	225	262.81

Spigot Equal Tee 90 Long



*	SDR11 code	D (mm)	£ ea
	PS2513079015	25	6.45
	PS2513089015	32	7.13
	PS2513099015	40	9.16
*	PS2513109015	50	11.81
*	PS2513119015	63	15.90
*	PS2513129015	75	26.74
*	PS2513139015	90	41.49
*	PS2513149015	110	53.03
	PS2513159015	125	78.98
*	PS2513169015	140	124.93
*	PS2513179015	160	143.11
*	PS2513189015	180	198.23
	PS2513199015	200	282.62
*	PS2513209015	225	351.65
*	PS2513219015	250	574.44
	PS2513229015	280	745.18
	PS2513239015	315	1,112.82
	PS2513249015	355	1,439.88
	PS2513259015	400	1,839.97
	PS2513269015	450	2,573.85
	PS2513279015	500	3,785.47

*	SDR17 code	D (mm)	£ ea
	PS2514119015	63	23.69
	PS2514129015	75	30.05
*	PS2514139015	90	35.11
*	PS2514149015	110	49.98
*	PS2514159015	125	70.59
	PS2514169015	140	107.28
*	PS2514179015	160	124.25
*	PS2514189015	180	175.62
*	PS2514199015	200	249.94
*	PS2514209015	225	298.35
*	PS2514219015	250	377.17
	PS2514229015	280	673.50
*	PS2514239015	315	831.28
	PS2514249015	355	1,186.65
	PS2514259015	400	1,438.36
	PS2514269015	450	2,155.49
	PS2514279015	500	2,861.23

* Stocked item

Spigot Red Tee Long



*	SDR11 code	D (mm)	£ ea
*	PS2523110815	63-32	21.71
*	PS2523131135	90-63	48.28
	PS2523141115	110-63	72.74
*	PS2523141315	110-90	83.12
	PS2523151115	125-63	105.16
	PS2523151215	125-75	111.06
	PS2523151315	125-90	109.33
	PS2523151415	125-110	99.33
	PS2523161115	140-63	159.78
	PS2523161215	140-75	158.99
	PS2523161315	140-90	161.73
	PS2523161415	140-110	164.03
	PS2523171115	160-63	183.08
	PS2523171215	160-75	188.86
	PS2523171315	160-90	187.98
	PS2523171415	160-110	194.11
	PS2523181215	180-75	292.01
	PS2523181315	180-90	301.21
	PS2523181415	180-110	305.00
	PS2523181515	180-125	305.38
	PS2523181615	180-140	301.35
	PS2523181715	180-160	279.60
	PS2523191115	200-63	347.97
	PS2523191215	200-75	348.36
	PS2523191315	200-90	351.20
*	PS2523191415	200-110	356.24
	PS2523191515	200-125	359.54
	PS2523191715	200-160	371.98
	PS2523201115	225-63	460.52
	PS2523201215	225-75	420.13
	PS2523201315	225-90	435.40
	PS2523201415	225-110	458.16
	PS2523201515	225-125	469.01
	PS2523201615	225-140	481.84
	PS2523201715	225-160	438.82
	PS2523211315	250-90	614.15
*	PS2523211415	250-110	614.15
	PS2523211515	250-125	614.15
	PS2523211715	250-160	658.80
	PS2523221415	280-110	928.60
	PS2523221715	280-160	936.78
	PS2523231415	315-110	1,243.95
*	PS2523231715	315-160	1,204.68
	PS2523232115	315-250	1,316.39
	PS2523232215	315-280	1,316.39

*	SDR17 code	D (mm)	£ ea
	PS2524110815	63-32	22.13
	PS2524141115	110-63	66.92
	PS2524141315	110-90	77.13
*	PS2524151115	125-63	92.08
	PS2524151215	125-75	94.91
	PS2524151315	125-90	94.91
	PS2524151415	125-110	88.06
	PS2524161115	140-63	137.74
	PS2524161215	140-75	142.45
	PS2524161315	140-90	142.62
	PS2524161415	140-110	145.21
*	PS2524171115	160-63	155.29
	PS2524171215	160-75	156.01
*	PS2524171315	160-90	158.99
	PS2524171415	160-110	163.24
	PS2524181215	180-75	242.19
	PS2524181315	180-90	243.05
*	PS2524181415	180-110	239.58
	PS2524181515	180-125	242.59
	PS2524181615	180-140	237.34
	PS2524181715	180-160	250.46
	PS2524191115	200-63	269.10
	PS2524191215	200-75	269.10
*	PS2524191315	200-90	270.75
	PS2524191415	200-110	277.44
*	PS2524191515	200-125	279.73
	PS2524191715	200-160	287.36
	PS2524201115	225-63	334.36
	PS2524201215	225-75	348.52
*	PS2524201315	225-90	346.16
*	PS2524201415	225-110	343.08
	PS2524201515	225-125	361.12
	PS2524201615	225-140	364.98
	PS2524201715	225-160	350.57
	PS2524211315	250-90	467.05
	PS2524211415	250-110	472.11
	PS2524211515	250-125	488.30
*	PS2524211715	250-160	493.21
*	PS2524221415	280-110	605.65
	PS2524221715	280-160	605.65
*	PS2524231415	315-110	868.98
	PS2524231715	315-160	868.98
	PS2524232115	315-250	1,350.79
	PS2524232215	315-280	1,350.79

* Stocked item

Spigot Reducing Tee 90 Long

Tee equal with welded Reducer.



*	SDR11 code	D1-D2 (mm)	£ ea
	PS2523242115	355-250	3,147.99
	PS2523242215	355-280	3,488.69
	PS2523242315	355-315	3,508.79
	PS2523252215	400-280	4,240.35
	PS2523252315	400-315	4,297.11
	PS2523252415	400-355	4,365.83
	PS2523272415	500-355	6,849.94
	PS2523272515	500-400	6,916.65
	PS2523272615	500-450	7,049.96

*	SDR17 code	D1-D2 (mm)	£ ea
	PS2524242115	355-250	2,627.89
	PS2524242215	355-280	2,698.81
	PS2524242315	355-315	3,177.12
	PS2524252215	400-280	3,300.80
	PS2524252315	400-315	3,336.04
	PS2524252415	400-355	3,423.59
	PS2524272415	500-355	5,746.44
	PS2524272515	500-400	5,746.44
	PS2524272615	500-450	5,939.00

Spigot Branch 45 Long



*	SDR11 code	D (mm)	£ ea
	PS2513094515	40	11.02
	PS2513104515	50	19.05
*	PS2513114515	63	112.40
	PS2513124515	75	149.08
*	PS2513134515	90	234.34
*	PS2513144515	110	375.12
*	PS2513154515	125	411.96
	PS2513174515	160	548.21
	PS2513184515	180	731.04
	PS2513194515	200	893.97
	PS2513204515	225	1,224.70
*	PS2513214515	250	1,753.62
	PS2513224515	280	POA
	PS2513234515	315	2,724.08

*	SDR17 code	D (mm)	£ ea
	PS2514094515	40	6.13
	PS2514104515	50	20.23
*	PS2514114515	63	30.46
	PS2514124515	75	53.76
*	PS2514134515	90	91.93
	PS2514144515	110	122.23
	PS2514154515	125	227.85
*	PS2514174515	160	376.77
	PS2514184515	180	493.34
*	PS2514194515	200	551.51
*	PS2514204515	225	867.60
*	PS2514214515	250	1,158.96
	PS2514224515	280	1,655.23
	PS2514234515	315	2,159.20

Spigot Red Br 45 Long



*	SDR17 code	D (mm)	£ ea
	PS2534121115	75-63	57.38

PE100 Y Long



*	SDR11 code	D (mm)	£ ea
	PS2543090815	40-32	12.05
	PS2543100915	50-40	16.67

* Stocked item

PE100-Brass Trans. long female



*	SDR11 code	D (mm)	£ ea
	PS2M13064335	20 x 1/2	26.48
	PS2M13074535	25 x 3/4	29.23
*	PS2M13084635	32 x 1	39.73
	PS2M13094735	40 x 1 1/4	51.54
	PS2M13104835	50 x 1 1/2	64.78
	PS2M13115035	63 x 2	86.49
	PS2M13125335	75 x 2 1/2	156.71
*	PS2M13135535	90 x 3	192.49
*	PS2M13145735	110 x 4	256.25
	PS2M13155735	125 x 4	306.65

PE100-Brass Trans. long male



*	SDR11 code	D (mm)	£ ea
	PS2M13067335	20 x 1/2	26.48
	PS2M13077535	25 x 3/4	29.23
*	PS2M13087635	32 x 1	39.73
	PS2M13097635	40 x 1	51.54
	PS2M13097735	40 x 1 1	51.54
	PS2M13107835	50 x 1	64.78
	PS2M13118035	63 x 2	86.49
	PS2M13128335	75 x 2 1/2	156.71
	PS2M13148735	110 x 4	306.66
	PS2M13158735	125 x 4	306.65

PE100-Stainless Steel Transition Union long female



*	SDR11 code	D (mm)	£ ea
	PS2V53074515	25 x 3/4	44.11
	PS2V53084615	32 x 1	56.24
	PS2V53094715	40 x 1 1/4	68.79
	PS2V53104815	50 x 1 1/2	83.15
	PS2V53115015	63 x 2	125.32
	PS2V53125315	75 x 2 1/2	178.35
	PS2V53135515	90 x 3	268.36
	PS2V53135715	90 x 4	331.20
	PS2V53145715	110 x 4	374.12

PE100-Stainless Steel Transition Union long male



*	SDR11 code	D (mm)	£ ea
	PS2V53077515	25 x 3/4	44.11
	PS2V53087615	32 x 1	58.39
	PS2V53097715	40 x 1 1/4	74.68
	PS2V53107815	50 x 1 1/2	91.63
	PS2V53118015	63 x 2	137.75
	PS2V53128315	75 x 2 1/2	204.77
	PS2V53138515	90 x 3	331.20
	PS2V53138715	90 x 4	207.71
	PS2V53148715	110 x 4	428.88

PE100-Steel Transition long



*	SDR11 code	D (mm)	£ ea
	PS2S13070035	25 x 3/4	59.51
	PS2S13080035	32 x 1	61.79
	PS2S13090035	40 x 1 1/4	72.80
	PS2S13100035	50 x 1 1/2	79.02
	PS2S13110035	63 x 2	88.00
	PS2S13120035	75 x 2 1/2	198.58
	PS2S13130035	90 x 3	252.14
	PS2S13140035	110 x 4	525.12
	PS2S13150035	125 x 4	600.47
	PS2S13160035	140 x 5	656.39
	PS2S13170035	160 x 6	840.64
	PS2S13180035	180 x 6	880.58
	PS2S13190035	200 x 8	1,076.64
	PS2S13200035	225 x 8	1,140.67
	PS2S13210035	250 x 10	1,945.24
	PS2S13220035	280 x 10	2,863.91
	PS2S13230035	315 x 12	3,182.09

Spigot Union long



*	SDR11 code	D (mm)	£ ea
	PS2353070015	25	30.86
	PS2353080015	32	39.75
	PS2353090015	40	51.63
	PS2353100015	50	44.95
	PS2353110015	63	64.46
	PS2353120015	75	88.17
	PS2353130015	90	110.12
	PS2353140015	110	147.10

* Stocked item

Short Spigot Fittings

PE100 Fittings with short spigots SDR11/17 black

injection moulded, for butt-welding.

Material

PE100, black, UK Water Reg4 approved.

Geometric Properties

Outside diameter and wall thickness according to EN 1555 and EN 12201.

Tolerances of z-sizes depend on the dimension. Up to d/D 160 = +/- 3 mm

and from d/D 180 = +/- 10 mm.

Type

Suitable for butt-welding.

Stub Flange Adaptor short



*	SDR11 code	D (mm)	£ ea
	PS233507F015	25	6.38
	PS233508F015	32	13.13
	PS233509F015	40	18.58
	PS233510F015	50	17.00
*	PS233511F015	63	17.63
	PS233512F015	75	21.02
*	PS233513F015	90	26.14
*	PS233514F015	110	38.96
*	PS233515F015	125	38.96
	PS233516F015	140	60.14
*	PS233517F015	160	73.91
*	PS233518F015	180	90.34
	PS233519F015	200	135.07
	PS233520F015	225	140.18
*	PS233521F015	250	193.30
*	PS233522F015	280	232.98
*	PS233523F015	315	345.61
*	PS233524F015	355	596.07
*	PS233525F015	400	752.14
*	PS233526F015	450	907.97
*	PS233527F015	500	976.06
*	PS233528F035	560	1,361.95
*	PS233529F015	630	2,420.98
	PS233530F035	710	2,747.46
	PS233531F035	800	3,582.40
	PS233532F035	900	5,681.62
	PS233533F035	1000	6,237.94

*	SDR17 code	D (mm)	£ ea
	PS233610F035	50	10.87
	PS233611F035	63	13.38
	PS233612F015	75	23.69
*	PS233613F015	90	25.11
*	PS233614F015	110	35.65
*	PS233615F015	125	34.07
	PS233616F015	140	44.70
*	PS233617F015	160	57.77
*	PS233618F015	180	63.68
	PS233619F015	200	103.50
	PS233620F015	225	105.86
	PS233621F015	250	143.01
*	PS233622F015	280	186.47
*	PS233623F015	315	253.76
*	PS233624F015	355	455.48
*	PS233625F015	400	591.58
*	PS233626F015	450	783.15
*	PS233627F015	500	851.24
*	PS233628F035	560	1,146.30
*	PS233629F015	630	1,620.84
	PS233630F035	710	1,702.45
	PS233631F035	800	2,349.37
	PS233632F035	900	3,087.08
	PS233633F035	1000	4,085.88

For backing rings please see page 51.

* Stocked item

Spigot Reducer short



*	SDR11 code	D (mm)	£ ea
	PS2325070635	25-20	8.50
	PS2325080635	32-20	9.92
	PS2325080715	32-25	6.11
	PS2325090635	40-20	11.33
	PS2325090715	40-25	4.87
	PS2325090815	40-32	6.23
	PS2325100715	50-25	9.57
	PS2325100815	50-32	8.82
	PS2325100915	50-40	8.82
	PS2325110815	63-32	10.76
	PS2325110915	63-40	11.29
	PS2325111015	63-50	11.97
	PS2325120935	75-40	19.29
	PS2325121035	75-50	19.29
	PS2325121135	75-63	19.29
	PS2325131015	90-50	18.01
*	PS2325131115	90-63	25.12
	PS2325131235	90-75	21.47
	PS2325141035	110-50	27.37
	PS2325141115	110-63	28.56
	PS2325141235	110-75	27.37
	PS2325141315	110-90	36.41
	PS2325151135	125-63	34.17
	PS2325151215	125-75	41.65
	PS2325151315	125-90	37.31
	PS2325151435	125-110	35.15
	PS2325161235	140-75	41.27
	PS2325161335	140-90	42.63
	PS2325161435	140-110	42.63
	PS2325161535	140-125	42.63
	PS2325171335	160-90	49.94
	PS2325171415	160-110	66.19
	PS2325171535	160-125	49.94
	PS2325171615	160-140	77.77
	PS2325181335	180-90	78.29
	PS2325181435	180-110	73.72
	PS2325181515	180-125	99.22
	PS2325181635	180-140	62.67
	PS2325181715	180-160	106.12
	PS2325191515	200-125	117.02
	PS2325191635	200-140	176.31
*	PS2325191715	200-160	131.68
	PS2325192035	200-180	139.59
	PS2325201415	225-110	141.25
	PS2325201635	225-140	204.50
	PS2325201715	225-160	153.66
	PS2325201815	225-180	169.29
	PS2325201935	225-200	151.57
	PS2325211715	250-160	183.49
	PS2325211815	250-180	197.63
	PS2325211915	250-200	211.75
	PS2325212015	250-225	227.91
	PS2325221815	280-180	299.32
	PS2325221915	280-200	319.04
	PS2325222015	280-225	325.35
*	PS2325222115	280-250	360.49

*	SDR17 code	D (mm)	£ ea
	PS2326100935	50-40	11.89
	PS2326110835	63-32	14.21
	PS2326110935	63-40	14.21
	PS2326111035	63-50	14.21
	PS2326120935	75-40	17.86
	PS2326121035	75-50	18.46
	PS2326121135	75-63	18.46
	PS2326131015	90-50	18.55
	PS2326131115	90-63	15.85
	PS2326131235	90-75	20.56
	PS2326141035	110-50	26.10
	PS2326141115	110-63	26.17
	PS2326141215	110-75	28.11
	PS2326141315	110-90	26.40
	PS2326151135	125-63	33.51
	PS2326151215	125-75	32.76
	PS2326151315	125-90	31.04
	PS2326151435	125-110	33.51
	PS2326161235	140-75	40.68
	PS2326161335	140-90	40.68
	PS2326161435	140-110	40.68
	PS2326161535	140-125	40.68
	PS2326171335	160-90	46.06
	PS2326171415	160-110	51.51
	PS2326171535	160-125	47.41
	PS2326171615	160-140	62.73
	PS2326181335	180-90	74.46
	PS2326181435	180-110	68.12
	PS2326181515	180-125	83.59
	PS2326181635	180-140	61.46
	PS2326181715	180-160	108.12
	PS2326191515	200-125	116.34
	PS2326191635	200-140	168.01
	PS2326191715	200-160	131.68
	PS2326191835	200-180	132.95
	PS2326201415	225-110	148.86
	PS2326201635	225-140	200.53
	PS2326201715	225-160	111.03
	PS2326201815	225-180	172.88
	PS2326201935	225-200	144.38
*	PS2326211715	250-160	185.14
*	PS2326211815	250-180	205.33
	PS2326211915	250-200	212.29
*	PS2326212015	250-225	227.38
	PS2326221815	280-180	282.79
	PS2326221915	280-200	318.53
	PS2326222015	280-225	311.58
	PS2326222115	280-250	355.18

* Stocked item

Spigot Reducer short contd.



*	SDR11 code	D (mm)	£ ea
	PS2325231935	315-200	343.06
	PS2325232015	315-225	378.57
*	PS2325232115	315-250	400.10
*	PS2325232215	315-280	454.91
	PS2325242035	355-225	511.37
	PS2325242115	355-250	506.21
	PS2325242215	355-280	541.13
*	PS2325242315	355-315	609.10
	PS2325252215	400-280	664.43
	PS2325252315	400-315	684.32
*	PS2325252415	400-355	791.77
	PS2325262335	450-315	866.47
	PS2325262435	450-355	913.25
	PS2325262535	450-400	726.50
	PS2325272435	500-355	1,398.47
	PS2325272535	500-400	1,219.02
	PS2325272635	500-450	1,015.33
	PS2325282535	560-400	1,662.95
	PS2325282635	560-450	1,325.50
	PS2325282735	560-500	1,118.76
	PS2325292635	630-450	2,082.50
	PS2325292735	630-500	1,781.46
	PS2325292835	630-560	1,583.91

*	SDR17 code	D (mm)	£ ea
	PS2326231935	315-200	326.60
*	PS2326232015	315-225	379.56
*	PS2326232115	315-250	409.09
	PS2326232215	315-280	450.87
	PS2326242035	355-225	511.37
*	PS2326242115	355-250	482.58
	PS2326242215	355-280	538.81
*	PS2326242315	355-315	596.76
	PS2326252215	400-280	678.40
*	PS2326252315	400-315	690.14
*	PS2326252415	400-355	798.50
*	PS2326262335	450-315	699.20
	PS2326262435	450-355	702.79
*	PS2326262535	450-400	650.60
	PS2326272435	500-355	1,167.42
	PS2326272535	500-400	1,015.33
	PS2326272635	500-450	881.56
	PS2326282535	560-400	1,364.89
	PS2326282635	560-450	1,082.18
	PS2326282735	560-500	915.07
	PS2326292635	630-450	1,699.37
	PS2326292735	630-500	1,480.50
	PS2326292835	630-560	1,298.06
	PS2326302835	710-560	1,774.43
	PS2326302935	710-630	1,624.36
	PS2326313035	800-710	2,397.21
	PS2326323135	900-800	4,570.79
	PS2326333235	1000-900	5,997.82

PE100 Transition short male



*	SDR11 code	D (mm)	£ ea
	PS2615077315	25 x 1/2	2.76
	PS2615077515	25 x 3/4	2.28
	PS2615087515	32 x 3/4	3.07
	PS2615087615	32 x 1	4.17
	PS2615097615	40 x 1	5.12
	PS2615097715	40 x 1 1/4	4.95
	PS2615107715	50 x 1 1/4	6.13
	PS2615107815	50 x 1 1/2	4.64
	PS2615117815	63 x 1 1/2	8.18
	PS2615118015	63 x 2	12.65

* Stocked item

PE100 Bend 90 short



*	SDR11 code	D (mm)	£ ea
	PS2425069035	20	7.33
	PS2425079035	25	7.56
	PS2425089035	32	7.77
	PS2425099035	40	10.16
	PS2425109035	50	12.72
	PS2425119035	63	18.10
	PS2425129035	75	24.88
	PS2425139035	90	36.26
	PS2425149035	110	68.86
	PS2425159035	125	97.05
	PS2425169035	140	129.80
	PS2425179035	160	158.07
	PS2425189035	180	187.15
	PS2425199035	200	278.91
	PS2425209035	225	332.75
	PS2425219035	250	640.43
	PS2425229035	280	832.74
	PS2425239035	315	1,149.63
	PS2425249035	355	3,932.34

*	SDR17 code	D (mm)	£ ea
	PS2426109035	50	12.12
	PS2426119035	63	16.74
	PS2426129035	75	24.45
	PS2426139035	90	31.92
	PS2426149035	110	67.14
	PS2426159035	125	85.31
	PS2426169035	140	123.90
	PS2426179035	160	136.68
	PS2426189035	180	168.99
	PS2426199035	200	209.29
	PS2426209035	225	257.90
	PS2426219035	250	435.47
	PS2426229035	280	565.95
	PS2426239035	315	781.89

Spigot Elbow 90 short



*	SDR11 code	D (mm)	£ ea
	PS2415079015	25	9.77
	PS2415089015	32	11.33
	PS2415099015	40	7.63
	PS2415109015	50	17.00
	PS2415119015	63	17.23
	PS2415129015	75	24.08
	PS2415139015	90	50.06
	PS2415149015	110	55.97
	PS2415159015	125	85.17
	PS2415169015	140	121.13
	PS2415179015	160	120.74
	PS2415189015	180	218.80
	PS2415199015	200	265.79
	PS2415209015	225	355.06
	PS2415219015	250	555.59
*	PS2415229015	280	673.59
	PS2415239015	315	858.47

*	SDR17 code	D (mm)	£ ea
	PS2416129015	75	28.25
	PS2416139015	90	31.33
	PS2416149015	110	48.00
	PS2416159015	125	67.85
	PS2416169015	140	110.74
	PS2416179015	160	99.09
	PS2416189015	180	173.39
	PS2416199015	200	224.39
	PS2416209015	225	269.34
	PS2416219015	250	430.30
	PS2416229015	280	547.25
	PS2416239015	315	702.79

* Stocked item

[illegible]

*	SDR17 code	D (mm)	£ ea
	PS2516109035	50	13.83
	PS2516119035	63	18.46
	PS2516129015	75	32.68
	PS2516139035	90	54.58
	PS2516149015	110	90.48
	PS2516159015	125	86.28
	PS2516169015	140	125.69
	PS2516179015	160	117.02
	PS2516189015	180	164.73
	PS2516199015	200	202.79
	PS2516209015	225	263.87
	PS2516219015	250	489.87
	PS2516229015	280	629.90
	PS2516239015	315	919.55

*	SDR17 code	D (mm)	£ ea
	PS2526141115	110-63	57.86
	PS2526141315	110-90	63.21
	PS2526171415	160-110	151.44
	PS2526191735	200-160	571.63
	PS2526201415	225-110	319.63
	PS2526201515	225-125	319.25
	PS2526201715	225-160	334.36

Seamless Pipe Bends

PE100 Fittings SDR11/17 black UK Water Reg4 approved: With long spigots, for butt-welding and electrofusion socket welding. Outside diameter and wall thickness according to EN 1555 and EN 12201.

Angles: Tolerances +/- 3°

Suitable for butt-welding and electrofusion socket-welding.

Seamless Pipe Bends 90 degree



*	SDR11 code	D (mm)	£ ea
	PS2433119025	63	182.61
	PS2433129025	75	202.84
	PS2433139025	90	215.67
	PS2433149025	110	294.60
	PS2433159025	125	338.28
	PS2433169025	140	388.74
	PS2433179025	160	452.49
	PS2433189025	180	747.19
	PS2433199025	200	907.36
	PS2433209025	225	1,076.58
	PS2433219025	250	1,339.86
	PS2433229025	280	1,678.06
	PS2433239025	315	2,082.47
	PS2433249025	355	3,115.35
	PS2433259025	400	3,786.32
	PS2433269025	450	5,351.28
	PS2433279025	500	8,048.69
	PS2433289025	560	10,069.04
	PS2433299025	630	14,234.51
	PS2433309025	710	27,369.88
	PS2433319025	800	30,102.80
	PS2433329025	900	63,525.30

*	SDR17 code	D (mm)	£ ea
	PS2434119025	63	164.66
	PS2434129025	75	169.15
	PS2434139025	90	180.40
	PS2434149025	110	227.00
	PS2434159025	125	268.85
	PS2434169025	140	310.34
	PS2434179025	160	340.49
	PS2434189025	180	544.59
	PS2434199025	200	655.33
	PS2434209025	225	771.74
	PS2434219025	250	1,001.47
	PS2434229025	280	1,162.76
	PS2434239025	315	1,517.88
	PS2434249025	355	2,103.08
	PS2434259025	400	3,086.23
	PS2434269025	450	4,367.67
	PS2434279025	500	6,268.78
	PS2434289025	560	8,550.62
	PS2434299025	630	10,665.58
	PS2434309025	710	18,199.03
	PS2434319025	800	28,667.38
	PS2434329025	900	39,085.54

Seamless Pipe Bends 60 degree



*	SDR11 code	D (mm)	£ ea
	PS2433116025	63	184.17
	PS2433126025	75	193.00
	PS2433136025	90	212.92
	PS2433146025	110	283.43
	PS2433156025	125	314.83
	PS2433166025	140	355.06
	PS2433176025	160	405.50
	PS2433186025	180	677.82
	PS2433196025	200	821.16
	PS2433206025	225	980.23
	PS2433216025	250	1,175.11
	PS2433226025	280	1,437.29
	PS2433236025	315	1,744.09
	PS2433246025	355	3,220.66
	PS2433256025	400	3,864.81
	PS2433266025	450	4,748.54
	PS2433276025	500	7,034.93
	PS2433286025	560	9,071.51
	PS2433296025	630	11,658.09
	PS2433306025	710	26,040.41
	PS2433316025	800	26,591.61
	PS2433326025	900	63,525.30

*	SDR17 code	D (mm)	£ ea
	PS2434116025	63	159.85
	PS2434126025	75	170.09
	PS2434136025	90	174.81
	PS2434146025	110	224.08
	PS2434156025	125	254.32
	PS2434166025	140	290.13
	PS2434176025	160	311.44
	PS2434186025	180	497.29
	PS2434196025	200	601.57
	PS2434206025	225	713.66
	PS2434216025	250	882.08
	PS2434226025	280	1,009.36
	PS2434236025	315	1,301.66
	PS2434246025	355	2,075.77
	PS2434256025	400	3,143.35
	PS2434266025	450	3,778.54
	PS2434276025	500	5,480.05
	PS2434286025	560	7,002.50
	PS2434296025	630	8,734.23
	PS2434306025	710	16,806.61
	PS2434316025	800	26,591.61
	PS2434326025	900	39,085.54

* Stocked item

Seamless Pipe Bends 45 degree



*	SDR11 code	D (mm)	£ ea
	PS2433114525	63	180.40
	PS2433124525	75	197.16
	PS2433134525	90	212.92
	PS2433144525	110	283.43
	PS2433154525	125	314.83
	PS2433164525	140	355.06
	PS2433174525	160	405.50
	PS2433184525	180	677.82
	PS2433194525	200	831.94
	PS2433204525	225	980.23
	PS2433214525	250	1,175.11
	PS2433224525	280	1,437.29
	PS2433234525	315	1,744.09
	PS2433244525	355	3,220.66
	PS2433254525	400	3,864.81
	PS2433264525	450	4,748.54
	PS2433274525	500	7,034.93
	PS2433284525	560	9,071.51
	PS2433294525	630	11,658.09
	PS2433304525	710	24,122.60
	PS2433314525	800	25,724.48
	PS2433324525	900	54,997.24

*	SDR17 code	D (mm)	£ ea
	PS2434114525	63	156.86
	PS2434124525	75	166.94
	PS2434134525	90	182.77
	PS2434144525	110	224.08
	PS2434154525	125	254.32
	PS2434164525	140	290.13
	PS2434174525	160	311.44
	PS2434184525	180	503.89
	PS2434194525	200	609.51
	PS2434204525	225	713.66
	PS2434214525	250	884.99
	PS2434224525	280	1,009.36
	PS2434234525	315	1,537.88
	PS2434244525	355	2,075.77
	PS2434254525	400	3,143.35
	PS2434264525	450	3,778.54
	PS2434274525	500	5,480.05
	PS2434284525	560	7,002.50
	PS2434294525	630	8,734.23
	PS2434304525	710	16,806.61
	PS2434314525	800	25,724.48
	PS2434324525	900	30,666.00

Seamless Pipe Bends 30 degree



*	SDR11 code	D (mm)	£ ea
	PS2433113025	63	180.40
	PS2433123025	75	197.16
	PS2433133025	90	212.92
	PS2433143025	110	283.43
	PS2433153025	125	318.93
	PS2433163025	140	355.06
	PS2433173025	160	410.86
	PS2433183025	180	677.82
	PS2433193025	200	831.94
	PS2433203025	225	993.14
	PS2433213025	250	1,175.11
	PS2433223025	280	1,437.29
	PS2433233025	315	1,767.16
	PS2433243025	355	3,263.08
	PS2433253025	400	3,864.81
	PS2433263025	450	4,748.54
	PS2433273025	500	7,034.93
	PS2433283025	560	9,071.51
	PS2433293025	630	11,658.09
	PS2433303025	710	24,122.60
	PS2433313025	800	25,724.48
	PS2433323025	900	54,997.24

*	SDR17 code	D (mm)	£ ea
	PS2434113025	63	156.86
	PS2434123025	75	166.94
	PS2434133025	90	174.81
	PS2434143025	110	224.08
	PS2434153025	125	254.32
	PS2434163025	140	290.13
	PS2434173025	160	311.44
	PS2434183025	180	497.29
	PS2434193025	200	609.51
	PS2434203025	225	713.66
	PS2434213025	250	884.99
	PS2434223025	280	1,022.57
	PS2434233025	315	1,301.66
	PS2434243025	355	2,075.77
	PS2434253025	400	3,143.35
	PS2434263025	450	3,778.54
	PS2434273025	500	5,480.05
	PS2434283025	560	7,002.50
	PS2434293025	630	8,734.23
	PS2434303025	710	16,806.61
	PS2434313025	800	25,724.48
	PS2434323025	900	30,666.00

* Stocked item

Seamless Pipe Bends 22 degree



*	SDR11 code	D (mm)	£ ea
	PS2433112225	63	180.40
	PS2433122225	75	197.16
	PS2433132225	90	212.92
	PS2433142225	110	287.13
	PS2433152225	125	314.83
	PS2433162225	140	355.06
	PS2433172225	160	405.50
	PS2433182225	180	677.82
	PS2433192225	200	831.94
	PS2433202225	225	980.23
	PS2433212225	250	1,175.11
	PS2433222225	280	1,437.29
	PS2433232225	315	1,744.09
	PS2433242225	355	3,220.66
	PS2433252225	400	3,864.81
	PS2433262225	450	4,748.54
	PS2433272225	500	5,480.05
	PS2433282225	560	9,071.51
	PS2433292225	630	11,658.09
	PS2433302225	710	24,122.60
	PS2433312225	800	25,724.48
	PS2433322225	900	54,997.24

*	SDR17 code	D (mm)	£ ea
	PS2434112225	63	156.86
	PS2434122225	75	166.94
	PS2434132225	90	174.81
	PS2434142225	110	224.08
	PS2434152225	125	254.32
	PS2434162225	140	293.98
	PS2434172225	160	311.44
	PS2434182225	180	497.29
	PS2434192225	200	609.51
	PS2434202225	225	723.02
	PS2434212225	250	884.99
	PS2434222225	280	1,022.57
	PS2434232225	315	1,318.83
	PS2434242225	355	2,075.77
	PS2434252225	400	3,143.35
	PS2434262225	450	3,778.54
	PS2434272225	500	5,480.05
	PS2434282225	560	7,002.50
	PS2434292225	630	8,734.23
	PS2434302225	710	16,806.61
	PS2434312225	800	25,724.48
	PS2434322225	900	30,666.00

Seamless Pipe Bends 11 degree



*	SDR11 code	D (mm)	£ ea
	PS2433111125	63	180.40
	PS2433121125	75	197.16
	PS2433131125	90	212.92
	PS2433141125	110	283.43
	PS2433151125	125	314.83
	PS2433161125	140	355.06
	PS2433171125	160	405.50
	PS2433181125	180	677.82
	PS2433191125	200	821.16
	PS2433201125	225	980.23
	PS2433211125	250	1,175.11
	PS2433221125	280	1,437.29
	PS2433231125	315	1,744.09
	PS2433241125	355	3,220.66
	PS2433251125	400	3,864.81
	PS2433261125	450	4,748.54
	PS2433271125	500	7,034.93
	PS2433281125	560	8,783.82
	PS2433291125	630	11,658.09
	PS2433301125	710	24,122.60
	PS2433311125	800	25,724.48
	PS2433321125	900	54,997.24

*	SDR17 code	D (mm)	£ ea
	PS2434111125	63	156.86
	PS2434121125	75	166.94
	PS2434131125	90	174.81
	PS2434141125	110	224.08
	PS2434151125	125	254.32
	PS2434161125	140	290.13
	PS2434171125	160	311.44
	PS2434181125	180	497.29
	PS2434191125	200	601.57
	PS2434201125	225	723.02
	PS2434211125	250	884.99
	PS2434221125	280	1,009.36
	PS2434231125	315	1,301.66
	PS2434241125	355	2,075.77
	PS2434251125	400	3,143.35
	PS2434261125	450	3,778.54
	PS2434271125	500	5,480.05
	PS2434281125	560	6,997.93
	PS2434291125	630	8,734.23
	PS2434301125	710	16,806.61
	PS2434311125	800	25,724.48
	PS2434321125	900	30,666.00

* Stocked item

Specialist Electrofusion Solutions



A comprehensive guide packed full of features and benefits of PLASSON's Specialist EF Products.

This user friendly guide covers all the essential details of our products, including installation methods, but in a straight forward manner enabling you to make an informed decision before you enquire further about these specialist EF products.

The brochure covers the following large diameter products:

- Large Bore Saddles, both with spigot or flanged outlets
- Repair saddle
- Specialist Installation Tools
- Hot Tap Drills
- LD Couplers
- Sensor Saddle
- Flex Restraint
- Spigot Fittings



For full details on PLASSON Specialist EF Solutions [click here](http://www.plasson.co.uk)

Metric Fittings 20mm - 110mm and Imperial Fittings 1/2" - 2"



Insert liner into pipe (metric 20mm-63mm only) and slacken nut until half the thread is visible.



Push pipe into body, through the nut, split ring, and 'O' ring.



Tighten nut firmly: Hand tight on pipe 20mm (1/2") - 32mm (1"), on pipe 40mm (1 1/4") and above use a PLASSON wrench.

Note: For diameters 40mm and above, chamfering and lubrication of the pipe will ease insertion (use silicon lubricant).
Metric fitting shown for illustrative purposes. Imperial fittings have black nuts.

Metric Fittings - 125mm



Draw the nut, collars, and 'O' ring over the end of the pipe to a distance of approx. 250mm (put the white split ring to one side for later use).



Insert the pipe into the body of the fitting until it meets the interior stop. Then draw the 'O' ring and collars close to the body of the fitting.



Tighten the nut with a PLASSON wrench until the 'O' ring and collars enter the fitting and reach their end position. Unscrew nut from fitting.



Open the white split ring and mount onto pipe with larger side against the collar ensuring that both parts meet the body of the fitting. Screw the nut tightly onto the fitting using a PLASSON wrench.

Metric Fittings - 160mm

- Undo and take out nuts & bolts.
- Take the two shell halves apart, remove the exposed sleeve & 'O' ring and place over the pipe end.
- Push the body of the fitting completely home over the pipe end.
- Place the two shell halves with grip rings over the pipe & fitting body.
- Insert bolts, washers, and nuts and tighten until the shells are in contact with each other.



PLASSON® Barrier



Remove nut and grip ring from fitting and mount brown nut onto the pipe and assemble grip ring flush with the pipe end.



Push the barbed end of the adaptor into the pipe until it meets the stop (a mallet may be required). Then push the plain end of the adaptor into the fitting until it meets the stop.



Screw nut tightly towards the body of the fitting using a PLASSON wrench.

PlasSaddle



The two clamps of the saddle wrap around the pipe and snap together. The saddle is now retained on the pipe and the installer is free to keep working.



Saddle body is positioned in place and connected to the clamps by hand tightening of the retaining nut. No small parts (nuts, bolts) that may fall and disappear in the trench are involved.



Use PLASSON mechanical spanner to rotate the nut another 1/2 turn and firmly secure the saddle in place. The outlet is then rotated and secured in the desired direction by tightening the grey nut.



Tapping of either live or unpressurised PE and PVC pipe mains is achieved by operating the integral cutter with a 12mm hex drive.

Plass4 Universal Fittings



Prepare the pipe by removing any unsound material adhering to the pipe then cut and deburr pipe as necessary.



Slide the universal end of the fitting onto the pipe end until it reaches the internal fins and a resistant point is felt. NOTE: DO NOT force pipe end past the internal fins as this may impair joint.



Tighten the black nut using a PLASSON wrench or similar. Assemble the Metric PE joint as per the standard fitting instructions.

Note: If reusing the fitting, ensure the metal teeth are located in the grip ring, and the pipe end does not pass the location of the internal fins.

Slide N' Seal Universal Slip Coupler



Mark pipe insertion depth. (approximately half the fitting length). Undo nuts 1 to 2 turns while ensuring they remain on the fitting.



Insert each pipe to the marking.



Tighten each nut firmly with a PLASSON wrench while holding the body with another wrench. The threads should no longer be visible.

Pushfit Universal



Prepare the pipe by removing any unsound material adhering to the pipe then cut and deburr pipe as necessary.




Push the pipe into the fitting up to the internal stop.



Tighten firmly using a PLASSON wrench or similar.

Pushfit assembly

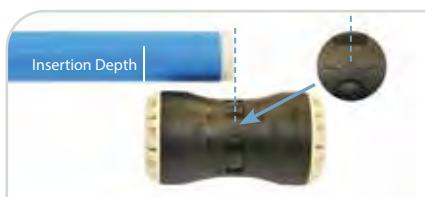

Insert liner into pipe then measure and mark correct insertion depth against fitting as shown.



Push pipe into fitting up to the mark ensuring the pipe has been pushed passed the internal 'O' ring.



Make sure the mark on the pipe is inline with the end of the fitting.

Note: For assembly of Cu/PB/PEX, follow instructions above but ensure pipe manufacturers liner is fitted where applicable as per their instructions.

Pushfit disassembly



Using the Pushfit wrench, turn the nut anticlockwise to release pipe from fitting.



If the fitting is to be reused, the split ring, grip ring, and nut MUST be inserted in the order shown.




The Cu/PB/PEX fitting may be undone to facilitate the withdrawal of the pipe, but the metal grip ring cannot be removed and reused. A new fitting will be required.

Copper Adaptor Set table X and Y (7438)



Remove nut from fitting and discard white split ring (except 35, 42, and 54mm copper, where the white split ring is used as a spacer). Push black rubber seal into fitting body and assemble components in the order shown above.

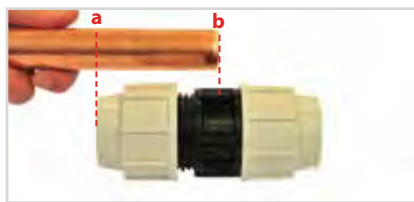

Place nut onto fitting leaving half the thread visible. Cut the copper pipe square and remove all burrs and sharp edges. Mark pipe at "a" when the pipe end reaches the centre of the body of the fitting, as shown by "b" above.



Push and twist the pipe through the nut, adaptor and metal ring into the body of the fitting, until the mark is in line with the end of the nut as shown. Tighten the nut with a PLASSON wrench.

Note: Lubrication of the pipe end will ease insertion (use silicon lubricant). Once tightened, the metal grip ring cannot be reused.

Imperial & Irish Pipe Adaptor (7786 / 7787 / 7788 / 7789 / 7995 / 7996)



Remove nut from fitting and discard white split ring (unless using 1 1/2" pipe). Mount nut on pipe and assemble red split ring flush with the pipe end (reuse white split ring for 1 1/2" pipe).



Push the barbed end of the adaptor into the pipe until it meets the stop. Then push the plain end of the adaptor into the fitting until it meets the stop.



Screw nut tightly towards the body of the fitting. Use a PLASSON wrench for 1" pipe and above.

Universal Pipe Adaptor (7896/7898)



Prepare pipe by ensuring that the end is free from grease and roughen outer surface with wire wool or similar. Remove nut from end of fitting and mount onto pipe, discard white split ring.



Push adaptor into fitting to the stop. Also push and twist the pipe into the fitting until it meets the internal stop.



Screw the nut tightly towards the body of the fitting. Final tightening with a PLASSON wrench is essential. **The installations MUST be anchored against end loading.**

Lead Adaptor (7782)



Remove nut from fitting and discard white split ring. Mount nut onto pipe followed by brown split ring and seal ring.



These components should be positioned 20mm from the pipe end.



Push pipe into the body of the fitting and tighten firmly with a PLASSON wrench (it is important that the pipe is NOT pushed fully up to the stop inside the fitting).

Note: This product seals on the outside of the pipe and it is therefore important that the external part of the pipe (where the seal is made) is in good condition. If external pipe is of poor quality it may be preferable to use the Plass4 Universal fitting.

PlassGas Reusable

PlassGas has been designed for multiple re-use when carrying out purging and bypass, replacing electrofusion fittings that are discarded after use. PlassGas can be dissassembled and reused multiple times.

For temporary use and are recommended for max 168 hour (7 day) use on low pressure and medium pressure gas systems.



Prior to use and without dismantling check for any sign of damage. Visually inspect the internal sealing ring for dirt or debris, this can be removed by rinsing with water and then drying.



Ensure the spigot or pipe end is clean and free from surface scratches or damage. When using 63mm pipe, use the Plasson chamfer tool for ease of insertion.



Prior to insertion, ensure that the locking nut is fully tightened onto the main body. Mark with a marker in the closed position.



Using the depth gauge on the PLASSON wrench, mark the spigot/pipe end. This shows the minimum depth required. The main body has a center stop so it cannot be over inserted. 32mm min depth 45mm or to stop. 63mm min depth 90mm or to stop.



Apply a leak detection fluid directly onto the sealing ring, as lubrication will ease the insertion.



Loosen the locking nut two or three turns, then slide onto the spigot/pipe. Once you have reached the center stop, or passed the minimum depth marker, re tighten the locking nut until the mark on the locking nut meets the mark on the main body.

Once the application has been completed and the fitting is no longer required on the spigot/pipe, loosen the locking nut sufficiently and slide off. Retighten and store for the next use.

Electrofusion

For EF joints ensure clean, dry working conditions and prepare pipe with appropriate tools to ensure removal of 0.2mm of surface of the pipe in the weld area.

For full jointing instructions please visit our [website: **plasson.co.uk**](https://www.plasson.co.uk/downloads/action/show_file/f/120)
https://www.plasson.co.uk/downloads/action/show_file/f/120



General note for all installations:

Before installation of all fittings, ensure that the end of the pipe to be inserted into the fitting is free of scratches and other imperfections and that both the pipe and the fitting itself are free of sand, mud, stones, etc. Where applicable ensure that split ring and grip ring teeth are sharp and bite into the pipe, to avoid pullouts if fittings are reused. If uncertain, replace the split ring and grip ring. Do not over tighten nuts when closing. Do not use wrenches or spanners with handle lengths longer than 46 cm. Alternatively replace split ring and grip ring where applicable. On MI and FI fittings and on PLASSON threaded fittings use PTFE to seal the thread. Do not use thread seal pastes.

Mechanical and Pushfit Fittings

Materials: Mechanical & pushfit fittings

Body: Polypropylene, high grade copolymer

Nut: High Grade Polypropylene

Split Ring and Grip Ring: Acetal (POM)

Liner: Acetal (POM)

Seal: Nitrile rubber (NBR)

Reinforcing Ring: Stainless steel on all female offtakes from 1¼" up to 4"

Threaded Fittings

Body: Polypropylene, high grade copolymer. Reinforcing Ring: Stainless steel. Brass Threads: CW617

Flanges

Flange dimensions in accordance with: BS EN 1092-1: 2018

All PLASSON products – MI and FI Threads

All threads conform to ISO - 7/1, BS 21, DIN 2999, NEN 3258, AS 1722 Part 1.

All external (male) threads are tapered. All internal (female) threads ≤ 3" are parallel. (unless stated)

Operating Temperatures

The fittings are not to be used with hot water, although they withstand the same temperature as the polyethylene pipe itself. The fittings and valves will withstand sub-zero temperatures.

Chemical Resistance

PLASSON fittings are supplied, as standard, with polyacetal split and grip rings and NBR seals which are suitable for water. For aggressive chemical applications CPVC split rings and EPDM or FPM 'O' rings can be supplied to produce a better chemical resistance.

Operating Pressures & Quality Certificates

PLASSON mechanical and pushfit fittings are tested and approved according to ISO 17885. For detailed pressure classification see table below. For WRAS approvals, please visit <http://www.wras.co.uk/directory/>.

For KIWA REG 4 approvals please visit <https://www.kiwa.com/gb/en/about-kiwa/water-products/>.

Product Code	Body Type	Pressure Rating	Stainless Steel Reinforcing Ring	From Pipe Diameter	To Pipe Diameter	From Thread	To Thread	From Outlet Size	To Outlet Size
Mechanical & Pushfit									
All Fittings	All Fitting Types	16.0							
Exception:									
Starts with 17	All 160mm Fittings	10.0							
Starts with 7 & 87	All Fittings with 3" Female Thread	10.0							
Starts with 7 & 87	All Fittings with 4" Thread	6.0							
77017	Plas4 (Universal)	10.0		50	50			35	50
7045	Slip Tee	12.5		40	63				
7120	End Plug	12.5		20	63				
7220	Compression Flange Adaptor	12.5		125	125				
7250	Threaded Adaptor	12.5		75	75	1 1/2"	3"		
7640/87640	45° Tee	8.0		63	110				
Mechanical Saddles									
16077	Saddle Single Outlet	12.5	YES	20	63	1/2"	1 1/2"		
16077	Saddle Single Outlet	12.5	YES	75	180	1/2"	3/4"		
16077	Saddle Single Outlet	10.0	YES	75	180	1"	2"		
Valves									
3047/3048	Angle Seat Valve	8.0							
3405	Threaded Stoptap	10.0				3/4"	1"		
3407	Stoptap	16.0		20	32				
3703	Mains Stop Valve	16.0				3/4"	2"		
PLASSON Threaded									
All Fittings	All Fitting Types	16.0							
Exception:									
Starts with 5	All Fitting Types	10.0				3/8"	3/8"		
5017	Threaded Socket	10.0				3"	3"		
5067	Threaded Nipple	10.0				3"	3"		

Electrofusion Fittings

Fitting Pressure Rating and Pipe Compatibility

PLASSON Fittings weld to PE80, PE100, PE100-RC and PEX-A pipes. Check that the pipe SDR is compatible with the PLASSON fittings. The range of compatible pipe SDR's for each specific fitting is defined on the fitting barcode label. For questions regarding general pipe SDR compatibility refer to PLASSON literature or contact your local PLASSON representative.

The following is a general guideline for PLASSON EF product pipe. SDR compatibility (in any case of discrepancy between the figure below and the figure on the barcode label, always refer to the barcode data).

Material

All PLASSON Electrofusion fittings are produced from material class PE100 which conform to international standards for potable water and natural or suitable manufactured gas systems.

Standards

PLASSON Electrofusion fittings are Certified to:

- EN12201:3 for Water
- EN1555:3 for Gas
- All Plasson EF fittings comply with DWi Regulation 31 for water quality and are approved (up to 315mm) to UK Water Reg4.

PLASSON's standard Electrofusion Fittings:

- PN 16 (Water)
- PE100 SDR11 (Gas)
- Up to 75mm (inclusive) are Weldable to Pipes SDR 11
- Elbows and Tees of main diameter 40mm-75mm SDR 11 to 17
- 90mm & Up are Weldable to Pipes SDR 11 to 17
- 63-75mm Tapping Saddles and Valves are suitable for SDR 11 to 17
- 225mm elbows SDR 11 to 21
- 250mm elbows SDR 11 to 26
- Tapping Saddles 90mm and above SDR 11 to 17
- Tapping Saddles below 90mm SDR 11

LightFit:

- PN 10 (Water)
- PE100 SDR17 (Gas)
- 40mm to 50mm are Weldable to Pipes SDR 11 to 17
- 63>90mm are Weldable to Pipes SDR 11 to 26
- 110mm>1000mm are Weldable to Pipes SDR 11 to SDR33 and in some cases SDR41 (see website for details)

Super Lightfit: available for pipe sizes 500>1000mm, suitable for pipework SDR17 to 41.

High Pressure Couplers: PN25 couplers available for pipe sizes 50mm to 355mm, for pipework SDR7 to 11.

Dimensional suitability:

Measure the pipe external diameter toward the pipe end using a Pi tape. The pipe external diameter must be within the tolerances defined in International standards such as EN 1555-2 and EN 12201-2. Measure the pipe external diameter toward the pipe end using a Pi tape to determine suitability.

Electrofusion, welding and cooling times are specified on the individual products. Welding times can also be recognised by appropriately equipped control boxes through the red pin connector or barcode.

Pin Size: 4.0mm

Voltage: 40V unless stated

Control box current capacity: <400mm 60/80amp / >400mm 80/110amp

Generators must be suitable for current load and be equipped with an automatic voltage regulator.

Due to design considerations, we recommend the use of Controllers with barcode reading facilities for the following products:

- Couplers above 400mm
- Flex Restraint
- Sensor Saddle

Notes

Whereas the products shown in this catalogue illustrate and describe the current state of their development, PLASSON reserves the right at all times to make such technical alterations as it shall see fit to its products. Although every care has been taken in the preparation of the information, specifications and other data included in this catalogue, we cannot rule out inadvertent errors or omissions. Purchasers should take into account possible deviations or variations which will not substantially diminish the functionality or performance of the products, and, in many cases, are designed to improve the same.

PLASSON® is the Registered Trademark of Plasson Ltd. or Plasson Maagan Michael Industries Ltd. PLASSON's products are protected by patents, trademark, design and copyright laws. Plasson UK Ltd Terms & Conditions apply to the exclusion of all other terms. A copy can be found on our website: www.plasson.co.uk

Sales Director

Victoria Fiddies
victoria.fiddies@plasson.co.uk
07788 185672

Business Development Manager - MCP

Adam Gatrell
adam.gatrell@plasson.co.uk
07786 156954

Customer Support Manager

Ruby Henry
ruby.henry@plasson.co.uk
07788 185676

Technical Support

Adam Cafer
adam.cafer@plasson.co.uk
07788 185674

Area Sales Managers**Scotland, & North East**

Aidan Brown
aidan.brown@plasson.co.uk
07788 185671

**North West & West Yorkshire**

TBC
sales@plasson.co.uk
07788 185673

**East**

Claire Burchell
claire.burchell@plasson.co.uk
07841 066309

**West Midlands & South Wales**

Harry Slade
harry.slade@plasson.co.uk
07788 185669

**South West**

Nick James
nick.james@plasson.co.uk
07788 185675

**South East**

Simon Denly
simon.denly@plasson.co.uk
07788 185670

**PLASSON UK Sales Office, Burgess Hill**

sales@plasson.co.uk
01444 244446



Tel: 01444 244446
Web: plasson.co.uk
Email: sales@plasson.co.uk