


Below-Ground Manifolds

Our below-ground manifolds provide a complete solution for multi-use water distribution, combining flexibility and ease of installation in one unified package.

The robust header efficiently divides the incoming mains water supply into 4 or 6 individual outlets, each equipped with a pre-fitted stop tap and optional meter housing unit.

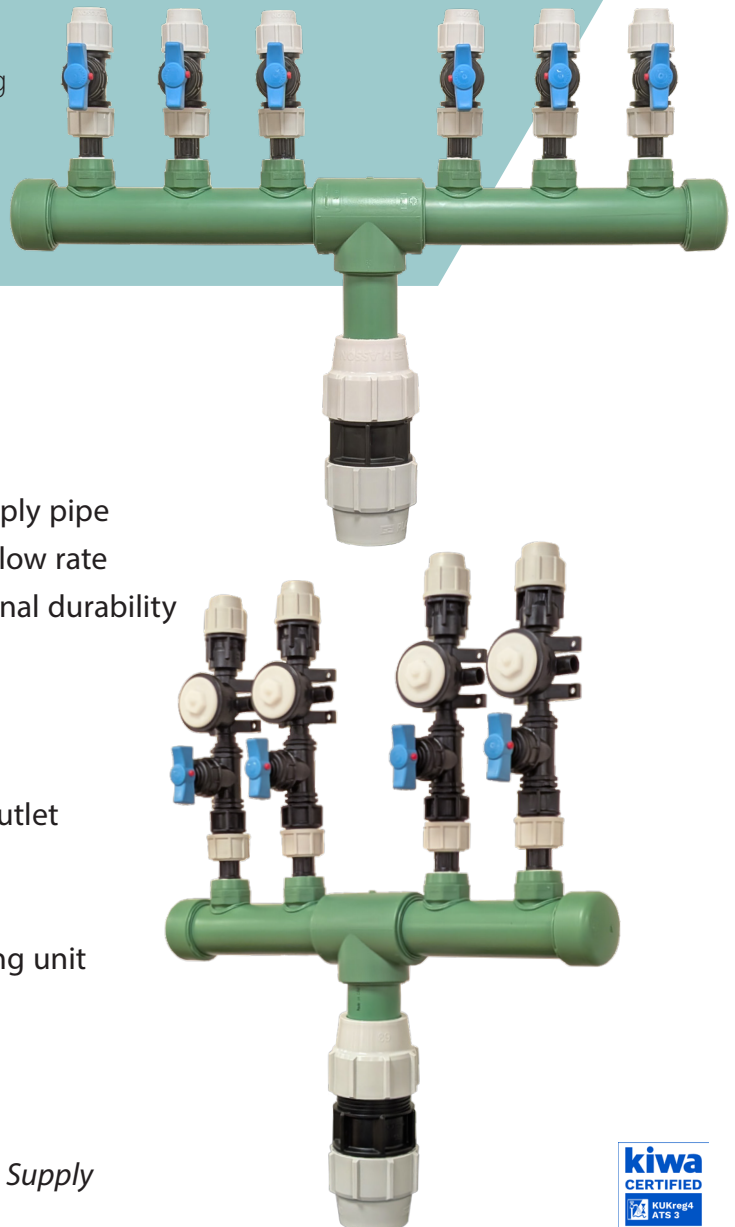

KEY FEATURES

Manifold


- Connection to incoming 63mm PE mains supply pipe
- 63mm header with 50mm NB for maximum flow rate
- High-grade PP-RCT construction for exceptional durability
- Available in 4 and 6 outlet configurations

Individual Outlets

- Pre-installed screw-down stop tap on each outlet
- 25mm PE pipe outlet connection
- Watertight NBR sealing throughout
- Optional 1½" Class D concentric meter housing unit

*All products and materials comply with the Water Supply
(Water Fittings) Regulations 1999*



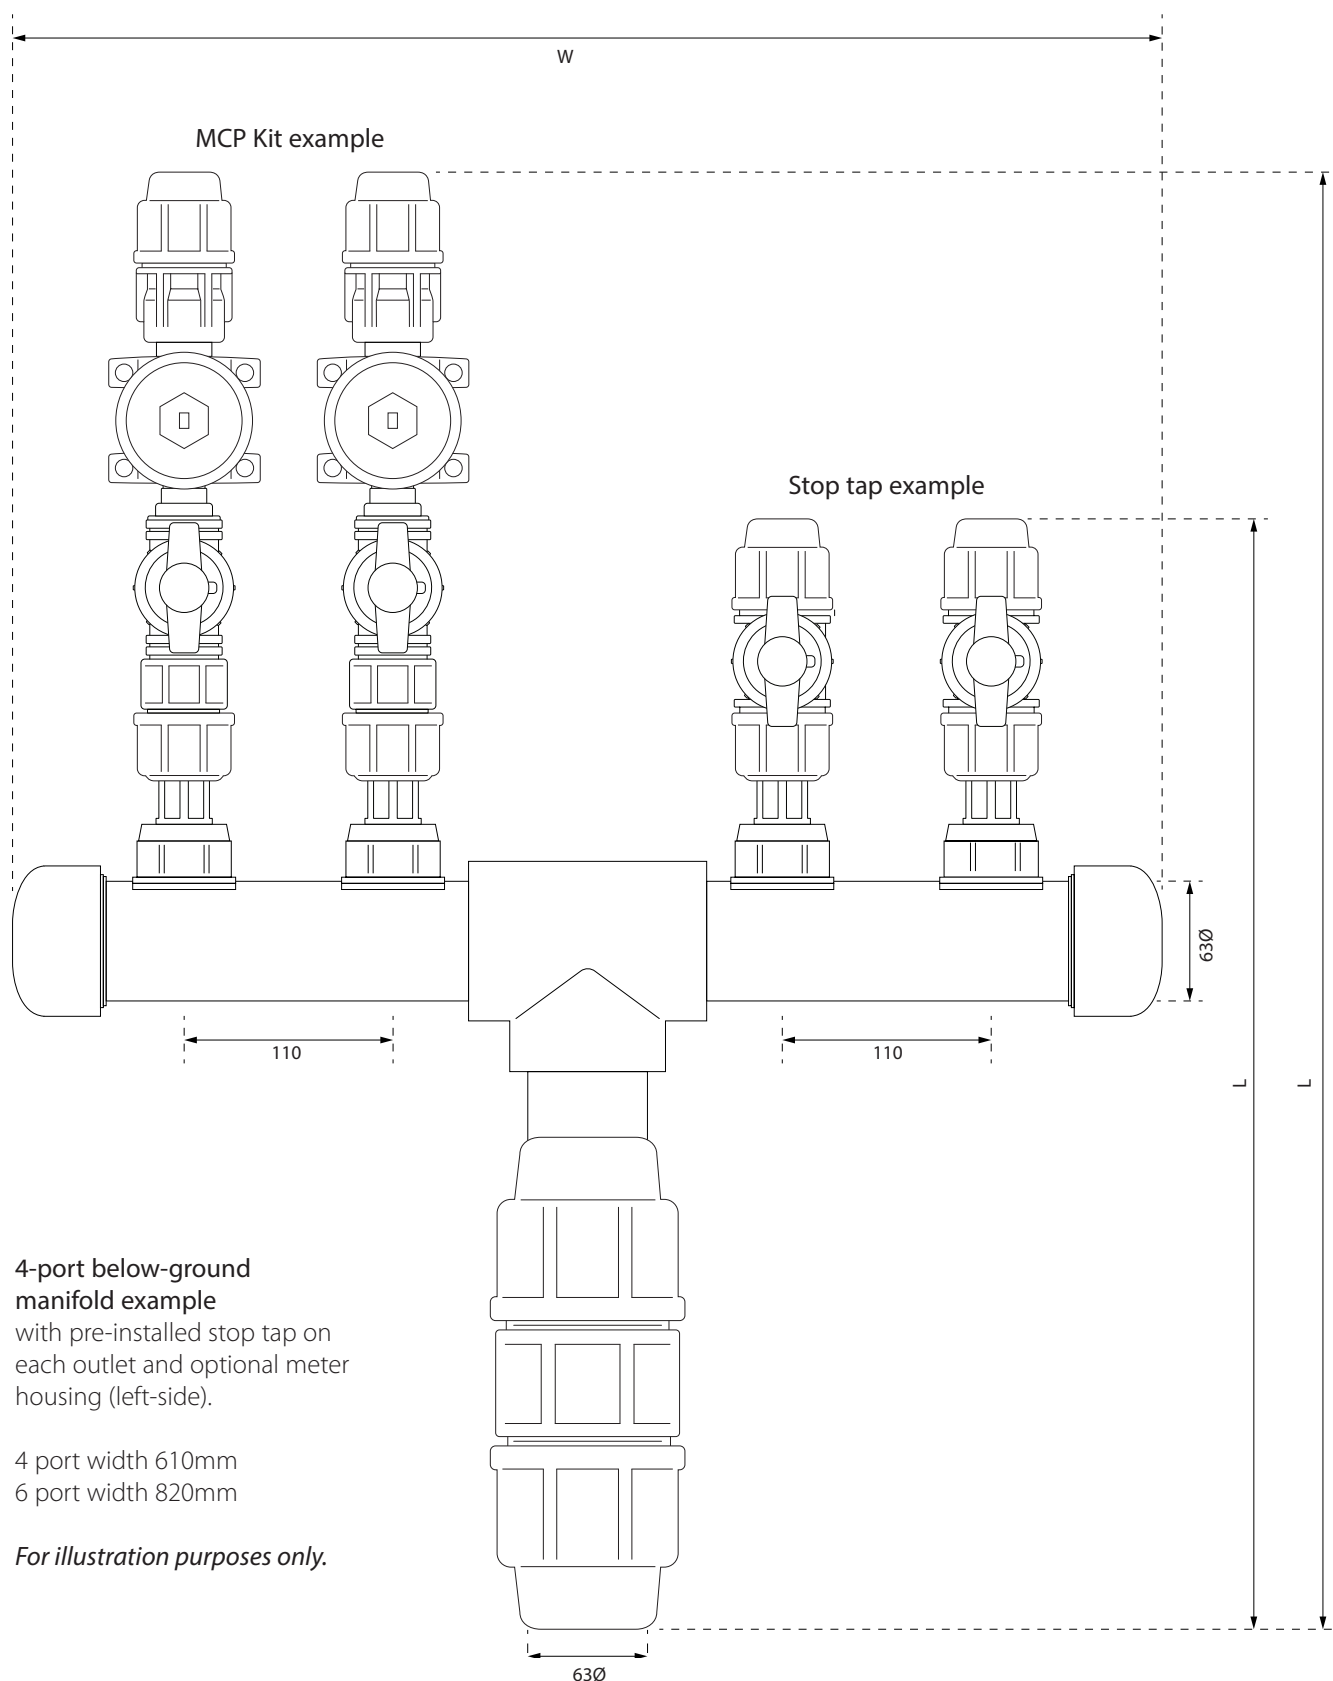

4-port below-ground manifold example
with pre-installed stop tap on each outlet and optional meter housing (left-side).

4 port width 610mm
6 port width 820mm

For illustration purposes only.

| Part Number | No. of ports | Description | Width (W) Overall mm | Length (L) Overall mm |
|----------------|--------------|---|-------------------------|--------------------------|
| PD3515C04ST063 | 4 | 4 Port Manifold 63mm inlet c/w Stop Tap 25mm outlet | 610 | 580 |
| PD3515C06ST063 | 6 | 6-Port Manifold 63mm inlet c/w Stop Tap 25mm outlet | 820 | 580 |
| PD3515C04MC063 | 4 | 4-Port Manifold 63mm inlet c/w MCP Kit 25mm outlet | 610 | 760 |
| PD3515C06MC063 | 6 | 6-Port Manifold 63mm inlet c/w MCP Kit 25mm outlet | 820 | 760 |

These measurements are an approximate, please allow a small tolerance