

LEXINGTON













APPLICATIONS

- Corridors
- Exits
- Escape routes

CONSTRUCTION


- Robust steel body
- White gloss powder coated finish
- Polycarbonate legend panel
- Supplied complete with arrow-down legend as shown
- Lithium Iron Phosphate (LiFePO4) 3.2V 1500mAh battery (not suitable for use below 0°C)

TECHNICAL DETAILS

- 3 hours operation on battery power after mains power failure
- Can be installed as maintained or non-maintained. Details in instructions.
- Momentary manual test button fitted
- 30m maximum viewing distance
- Self-test version, compliant with BS5266 available. Suffix STM3 as listed

OPTIONS

LEGENDS Alternative legends available as listed - to be ordered as separate items. For "man running through door", use suffix V2, as listed.

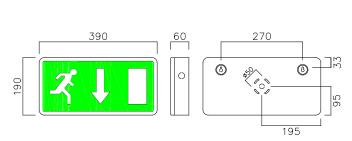

ORDER CODE	DESCRIPTION
NLE/M3	Lexington LED Exit Box Maintained 3Hr
NLE/STM3	Lexington LED Exit Box Maintained 3Hr Self Test
ATTACHMENTS	
NLE/LE/Down	Lexington Legend Down
NLE/LE/LEFT	Lexington Legend Left
NLE/LE/RIGHT	Lexington Legend Right
NLE/LE/UP	Lexington Legend Up
NLE/V2/LE/DOWN	Lexington V2 Legend Down
NLE/V2/LE/LEFT	Lexington V2 Legend Left
NLE/V2/LE/RIGHT	Lexington V2 Legend Right
NLE/V2/LE/UP	Lexington V2 Legend Up (Ahead)