

# FAT



## Mechanical data:

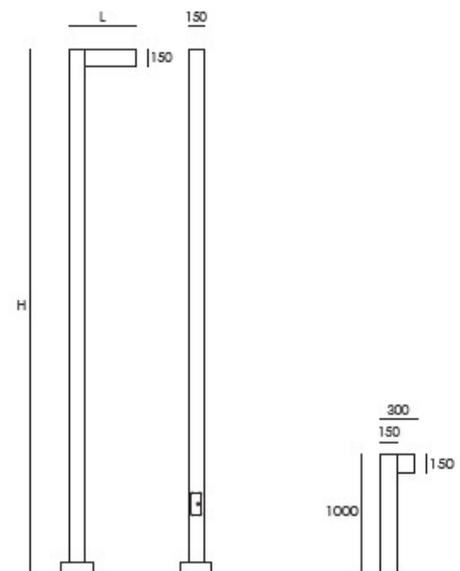
Mounting: on the ground / foundation required  
 Casing: aluminium  
 Power supply: inside

## Optical data:

Light distribution: symmetrical, street or park  
 Lighting: direct

## Other data:

Contains light source: yes  
 Type of source: LED  
 Application: parks, estates, surroundings of office buildings  
 On request: fuse connector, DALI, A 1-10V








Available in four dimensions, the FAT luminaire provides a well efficient outdoor lighting solution for various applications in places such as parks, cycle paths, residential streets and even main roads and boulevards. The luminaire offers three optics to choose from.

## Gallery



**C - color**

						
cold white 03 matt 93 glossy	warm white 10 matt 91 glossy	light grey 06 matt 96 glossy	grey 07 matt 97 glossy	grey graphite 80 matt 84 glossy	anthracite 70 matt 76 glossy	black 05 matt 95 glossy

**L - lenses to choose:**

- 02 - asymmetric floodlighting distribution
- 03 - street lighting distribution
- 04 - park lighting distribution

\* for power supply cable from 4mm<sup>2</sup> to 25mm<sup>2</sup> (for power supply cable up to 4mm<sup>2</sup> fuse connector included)

Catalogue code	Light source	Light flux	Power	Color temperature	CRI/RA	Weight	Dimensions
5496.804.LC	LED	8000lm	62W	4000K	≥ 80	39,0kg	L=800, W=150, H=600mm