


TOTEM



general data:

luminaire body :	aluminum
mounting type:	foundation
ingress protection IP:	65
operating temperature range:	from -40° to +40°
lifetime L80B10 :	100 000h
impact protection IK:	10

electrical data:


nominal voltage:	220-240V AC
nominal frequency:	50-60Hz
luminaire nominal power:	6W, 13W
protection class :	I
connection:	connector in a box
wiring:	through
dimming:	ON-OFF, DALI
power supply:	inside the luminaire

optical data:

optical system:	lens
material:	silicon
light emission:	direct
light distribution:	symmetrical



lighting data:

light source:	LED
luminous flux from luminaire 13W, 25W:	1455lm, 2798lm
luminous efficacy from luminaire 13W, 25W:	112lm/W, 112lm/W
colour temperature:	3000K, 4000K
colour rendering index:	CRI>80
colour tolerance SDCM:	SDCM<3
tolerance of luminous flux:	+/-10%

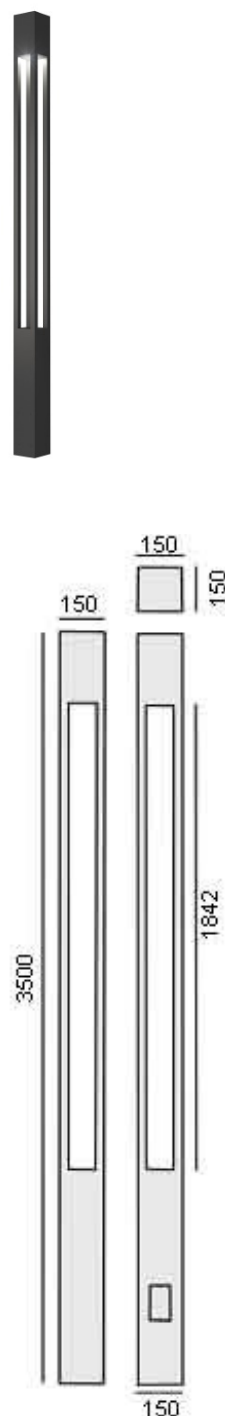

This is a range of bollards/light poles designed to maintain a uniform design. The totem is distinguished by an interesting, intriguing shape. In addition, the light coming out is directed in four directions. The direct way of lighting allow you to create unique lighting arrangements, perfectly emphasize the surroundings of the building. Luminaire made of aluminum. Ingress protection IP65, Impact protection IK10, protection class I.

Photometric body

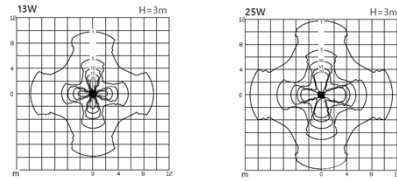


Gallery



E- electronics

O- On- Off

D- DALI

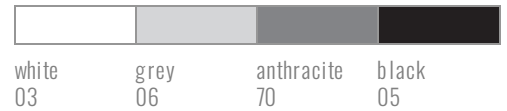

C - colour

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Box dimensions
9248.03EC	1396lm	13W	112lm/W	3000K	≥80	24 kg	17 0x17 0x3520mm
9248.04EC	1455lm	13W	112lm/W	4000K	≥80	24 kg	17 0x17 0x3520mm
9249.03EC	2686lm	25W	96lm/W	3000K	≥80	24 kg	17 0x17 0x3520mm
9249.04EC	2798lm	25W	96lm/W	4000K	≥80	24 kg	17 0x17 0x3520mm

Accessories

foundation

catalog number: 1300.1000



foot cover

catalog number: 90.26C

