




DAIKIN AURORA

Central Air Conditioning Heat Pump (HP)
Singlezone Non-Ducted, Floor Placement
AHRI Cert #+: **218026593**

Outdoor Unit Model #+: **RXP09AVJU***
Indoor Model #+: **FVXV09AVJUW***

- 🔥 Maximum Heating Capacity (Btu/h) @5°F: **12,000**
- 🔥 Rated Heating Capacity (Btu/h) @47°F+: **12,000**
- ❄️ Rated Cooling Capacity (Btu/h) @95°F+: **9,000**

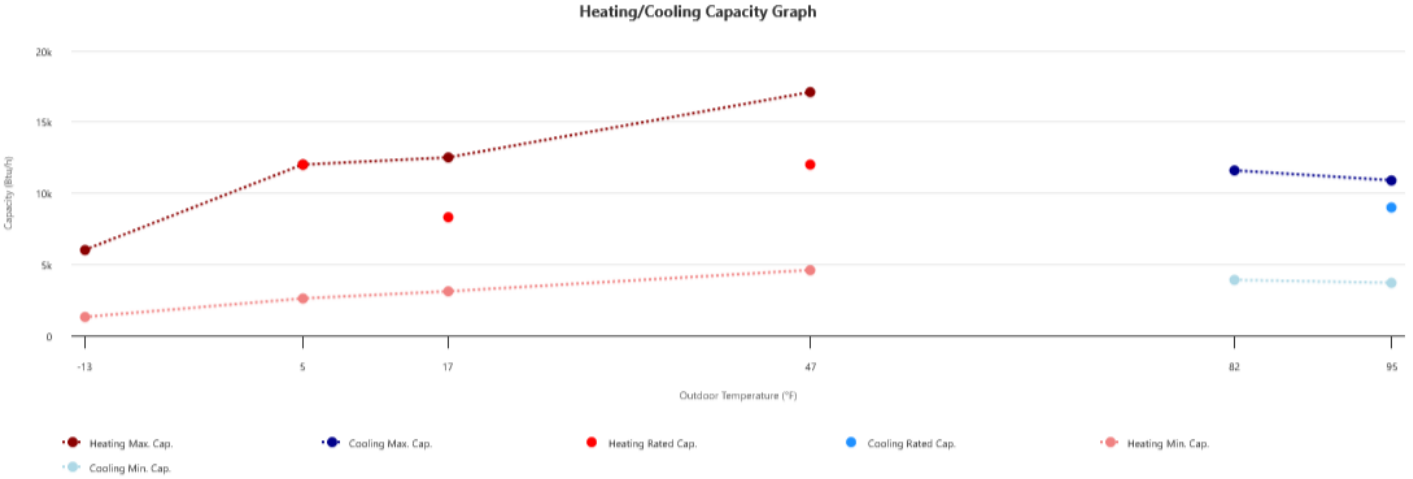

Information Tables

Brand	DAIKIN
Series	AURORA
Ducting Configuration	Singlezone Non-Ducted, Floor Placement
AHRI Certificate #*	218026593
Outdoor Unit Model #*	RXP09AVJU*
Indoor Model #*	FVXV09AVJUW*
Indoor Unit Type*	Mini-Splits
Furnace Model #	
EER*	
SEER*	
HSPF (Region IV)*	
EER2*	12
SEER2*	19.5
HSPF2 (Region IV)*	9.7
HSPF2 (Region V)	8.5
ENERGY STAR V6.1	✘
ENERGY STAR V6.1 Cold Climate	✘
ENERGY STAR V5.0	✘
Federal Tax Credit Eligibility North	
Federal Tax Credit Eligibility South	
CEE Tier 1 Path A (2025)	✔
CEE Tier 1 Path B (2025)	✔
Capacity Maintenance (Rated 17°F/Rated 47°F)	69%
Capacity Maintenance (Rated 5°F/Rated 47°F)	100%
Capacity Maintenance (Max 5°F/Rated 47°F)	100%
Variable Capacity	✔
Integration	
Connectivity	
Operational Diagnostics	
Refrigerant	R-32
Created At	2026-03-06
Updated At	2026-05-08
Sold In*	USA, Canada

Performance Specs

Heating / Cooling	Outdoor Dry Bulb	Indoor Dry Bulb				
			Unit	Min	Rated*	Max
Cooling	95°F	80°F	Btu/h*	3,700	9,000	10,900
			kW	0.29	0.75	0.91
			COP	3.74	3.52	3.51
Cooling	82°F	80°F	Btu/h*	3,900	-	11,600
			kW	0.26	-	0.77
			COP	4.4	-	4.42
Heating	47°F	70°F	Btu/h*	4,600	12,000	17,100
			kW	0.29	0.98	1.67
			COP	4.65	3.59	3
Heating	17°F	70°F	Btu/h*	3,100	8,300	12,500
			kW	0.2	0.87	1.75
			COP	4.54	2.8	2.09
Heating	5°F	70°F	Btu/h*	2,600	12,000	12,000
			kW	0.17	1.95	1.95
			COP	4.48	1.8	1.8
Heating	-13°F	70°F	Btu/h*	1,300	-	6,000
			kW	0.12	-	1.42
			COP	3.17	-	1.24