



DAIKIN AURORA

Central Air Conditioning Heat Pump (HP)

Singlezone Non-Ducted, Floor Placement

AHRI Cert #+: 218026595


Outdoor Unit Model #+: RXP12AVJU*

Indoor Model #+: FVXV12AVJUW*

🔥 Maximum Heating Capacity (Btu/h) @5°F: 14,000

🔥 Rated Heating Capacity (Btu/h) @47°F: 14,000

❄️ Rated Cooling Capacity (Btu/h) @95°F: 12,000

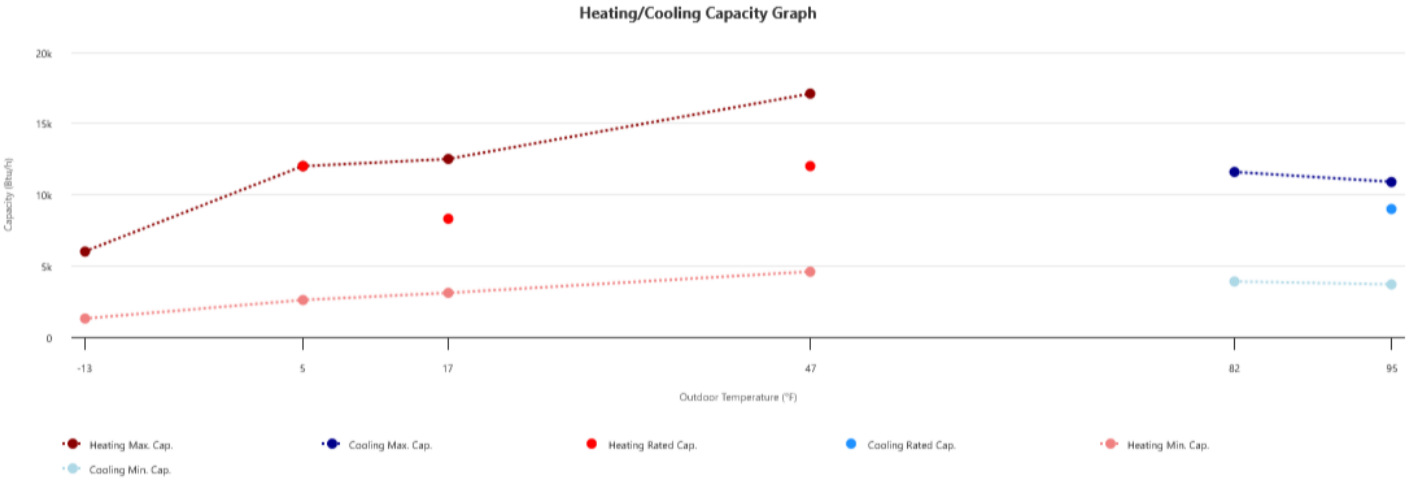

Information Tables

Brand	DAIKIN
Series	AURORA
Ducting Configuration	Singlezone Non-Ducted, Floor Placement
AHRI Certificate #*	218026595
Outdoor Unit Model #*	RXP12AVJU*
Indoor Model #*	FVXV12AVJUW*
Indoor Unit Type*	Mini-Splits
Furnace Model #	
EER*	
SEER*	
HSPF (Region IV)*	
EER2*	10.5
SEER2*	19.5
HSPF2 (Region IV)*	9.5
HSPF2 (Region V)	8.1
ENERGY STAR V6.1	✘
ENERGY STAR V6.1 Cold Climate	✘
ENERGY STAR V5.0	✘
Federal Tax Credit Eligibility North	
Federal Tax Credit Eligibility South	
CEE Tier 1 Path A (2025)	✔
CEE Tier 1 Path B (2025)	✘
Capacity Maintenance (Rated 17°F/Rated 47°F)	67%
Capacity Maintenance (Rated 5°F/Rated 47°F)	100%
Capacity Maintenance (Max 5°F/Rated 47°F)	100%
Variable Capacity	✔
Integration	
Connectivity	
Operational Diagnostics	
Refrigerant	R-32
Created At	2026-03-06
Updated At	2026-05-08
Sold In*	USA, Canada

Performance Specs

Heating / Cooling	Outdoor Dry Bulb	Indoor Dry Bulb				
			Unit	Min	Rated*	Max
Cooling	95°F	80°F	Btu/h*	3,700	12,000	12,600
			kW	0.29	1.14	1.2
			COP	3.74	3.08	3.08
Cooling	82°F	80°F	Btu/h*	3,900	-	13,400
			kW	0.26	-	1.05
			COP	4.4	-	3.74
Heating	47°F	70°F	Btu/h*	4,600	14,000	19,900
			kW	0.29	1.14	1.95
			COP	4.65	3.6	2.99
Heating	17°F	70°F	Btu/h*	3,000	9,400	13,200
			kW	0.19	0.98	1.82
			COP	4.63	2.81	2.13
Heating	5°F	70°F	Btu/h*	2,400	14,000	14,000
			kW	0.16	2.28	2.28
			COP	4.4	1.8	1.8
Heating	-13°F	70°F	Btu/h*	1,100	-	6,600
			kW	0.12	-	1.71
			COP	2.69	-	1.13