



DAIKIN AURORA

Central Air Conditioning Heat Pump (HP)

Singlezone Non-Ducted, Floor Placement

AHRI Cert #+: 218026597


Outdoor Unit Model #+: RXP15AVJU*

Indoor Model #+: FVXV15AVJUW*

🔥 Maximum Heating Capacity (Btu/h) @5°F: 18,000

🔥 Rated Heating Capacity (Btu/h) @47°F+: 18,000

❄️ Rated Cooling Capacity (Btu/h) @95°F+: 15,000

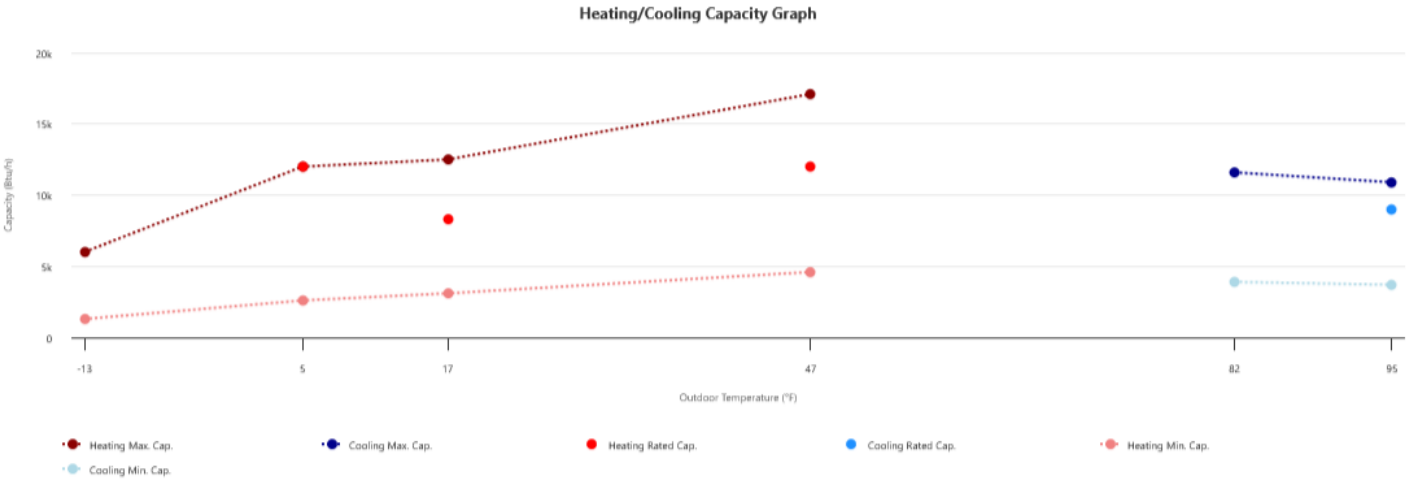

Information Tables

| | |
|--|--|
| Brand | DAIKIN |
| Series | AURORA |
| Ducting Configuration | Singlezone Non-Ducted, Floor Placement |
| AHRI Certificate #* | 218026597 |
| Outdoor Unit Model #* | RXP15AVJU* |
| Indoor Model #* | FVXV15AVJUW* |
| Indoor Unit Type* | Mini-Splits |
| Furnace Model # | |
| EER* | |
| SEER* | |
| HSPF (Region IV)* | |
| EER2* | 12 |
| SEER2* | 19.5 |
| HSPF2 (Region IV)* | 9.5 |
| HSPF2 (Region V) | 8 |
| ENERGY STAR V6.1 | ✘ |
| ENERGY STAR V6.1 Cold Climate | ✘ |
| ENERGY STAR V5.0 | ✘ |
| Federal Tax Credit Eligibility North | |
| Federal Tax Credit Eligibility South | |
| CEE Tier 1 Path A (2025) | ✔ |
| CEE Tier 1 Path B (2025) | ✔ |
| Capacity Maintenance (Rated 17°F/Rated 47°F) | 75% |
| Capacity Maintenance (Rated 5°F/Rated 47°F) | 100% |
| Capacity Maintenance (Max 5°F/Rated 47°F) | 100% |
| Variable Capacity | ✔ |
| Integration | |
| Connectivity | |
| Operational Diagnostics | |
| Refrigerant | R-32 |
| Created At | 2026-03-06 |
| Updated At | 2026-05-08 |
| Sold In* | USA, Canada |

Performance Specs

| Heating / Cooling | Outdoor Dry Bulb | Indoor Dry Bulb | Unit | Min | Rated* | Max |
|-------------------|------------------|-----------------|--------|-------|--------|--------|
| | | | | | | |
| Cooling | 95°F | 80°F | Btu/h* | 6,100 | 15,000 | 19,100 |
| | | | kW | 0.45 | 1.25 | 1.66 |
| | | | COP | 3.97 | 3.52 | 3.37 |
| Cooling | 82°F | 80°F | Btu/h* | 6,500 | - | 20,200 |
| | | | kW | 0.4 | - | 1.48 |
| | | | COP | 4.76 | - | 4 |
| Heating | 47°F | 70°F | Btu/h* | 7,300 | 18,000 | 20,400 |
| | | | kW | 0.59 | 1.76 | 1.93 |
| | | | COP | 3.63 | 3 | 3.1 |
| Heating | 17°F | 70°F | Btu/h* | 5,400 | 13,500 | 18,600 |
| | | | kW | 0.44 | 1.58 | 2.67 |
| | | | COP | 3.6 | 2.5 | 2.04 |
| Heating | 5°F | 70°F | Btu/h* | 4,700 | 18,000 | 18,000 |
| | | | kW | 0.39 | 2.93 | 2.93 |
| | | | COP | 3.53 | 1.8 | 1.8 |
| Heating | -13°F | 70°F | Btu/h* | 3,300 | - | 12,600 |
| | | | kW | 0.31 | - | 2.35 |
| | | | COP | 3.12 | - | 1.57 |