



Submittal Data Sheet

Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump
FTXQ09ASBU9RXQ09ASBU9

FEATURES

- Flare less joint
- 15A Circuit Breaker
- Removable Drain Pan
- Daikin Swing compressor with Inverter
- Indoor Unit Quiet Operation
- Auto Defrost, Auto Fan Speed and Suto Restart (after power failure)
- Program Dry function
- Wide Angle Louvers and Vertical Auto Swing
- Energy Saving Function
- Sleep Mode
- Mold Proof Air Filter

BENEFITS

- Easier, Faster and more reliable installtion with Flareless joint
- 15A circuit breaker only needs one space in Electrical Panel.
- Precharged for up to 50'
- 12 year Warranty
- R-32 is Easy, Proven, Efficient and Available
- Simple maintenance
- Reduced power consumption
- Addordable cost saving solution
- Blue fin protection increases life span of outdoor unit.

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump
FTXQ09ASBU9RXQ09ASBU9

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTXQ09ASBU9	Indoor Unit Name:	Daikin Oterra 115V R-32 -- 9K Indoor High Wall Unit
Outdoor Unit Model No.	RXQ09ASBU9	Outdoor Unit Name:	Daikin Oterra 115V Heat Pump Ductless ODU 0.75 Ton
Rated Cooling Capacity (Btu/hr):	9,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	8,140	Rated Piping Length(ft):	50
Max/Min Cooling Capacity (Btu/hr):	10,500 / 2,800	Rated Height Difference (ft):	50.00
Cooling Input Power (kW):	1.110	Heating Input Power (kW):	1.18
SEER2 (Non-Ducted/Ducted):	20.00 /	HSPF2 (Non-Ducted/Ducted):	9.0 /
EER2 (Non-Ducted/Ducted):	12.00 /		
Rated Heating Capacity (Btu/hr):	10,900	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Max/Min Heating Capacity (Btu/hr):	12,000 / 3,800		

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 115
Holding Refrigerant Charge (oz):	18.4	Heating Operation Range (°F WB):	5 - 65
Additional Charge (oz/ft):	0.22	Max. Pipe Length (Vertical) (ft):	50
Pre-charge Piping (Length) (ft):	50	Cooling Range w/Baffle (°F DB):	-
Max. Pipe Length (Total) (ft):	66		
Max Height Separation (Ind to Ind ft):	50		
Fan/Compressor Drive Input:	11.3		

Submittal Data Sheet


Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump

FTXQ09ASBU9RXQ09ASBU9

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	115 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	424/307/261/134
Power Supply Connections:	4	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	3/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	11-1/4 x 30-5/16 x 8-3/4	Condensate Connection (inch):	5/8
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L/SL) (dBA):	43/35/30/21
Net Weight (lb):	18	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

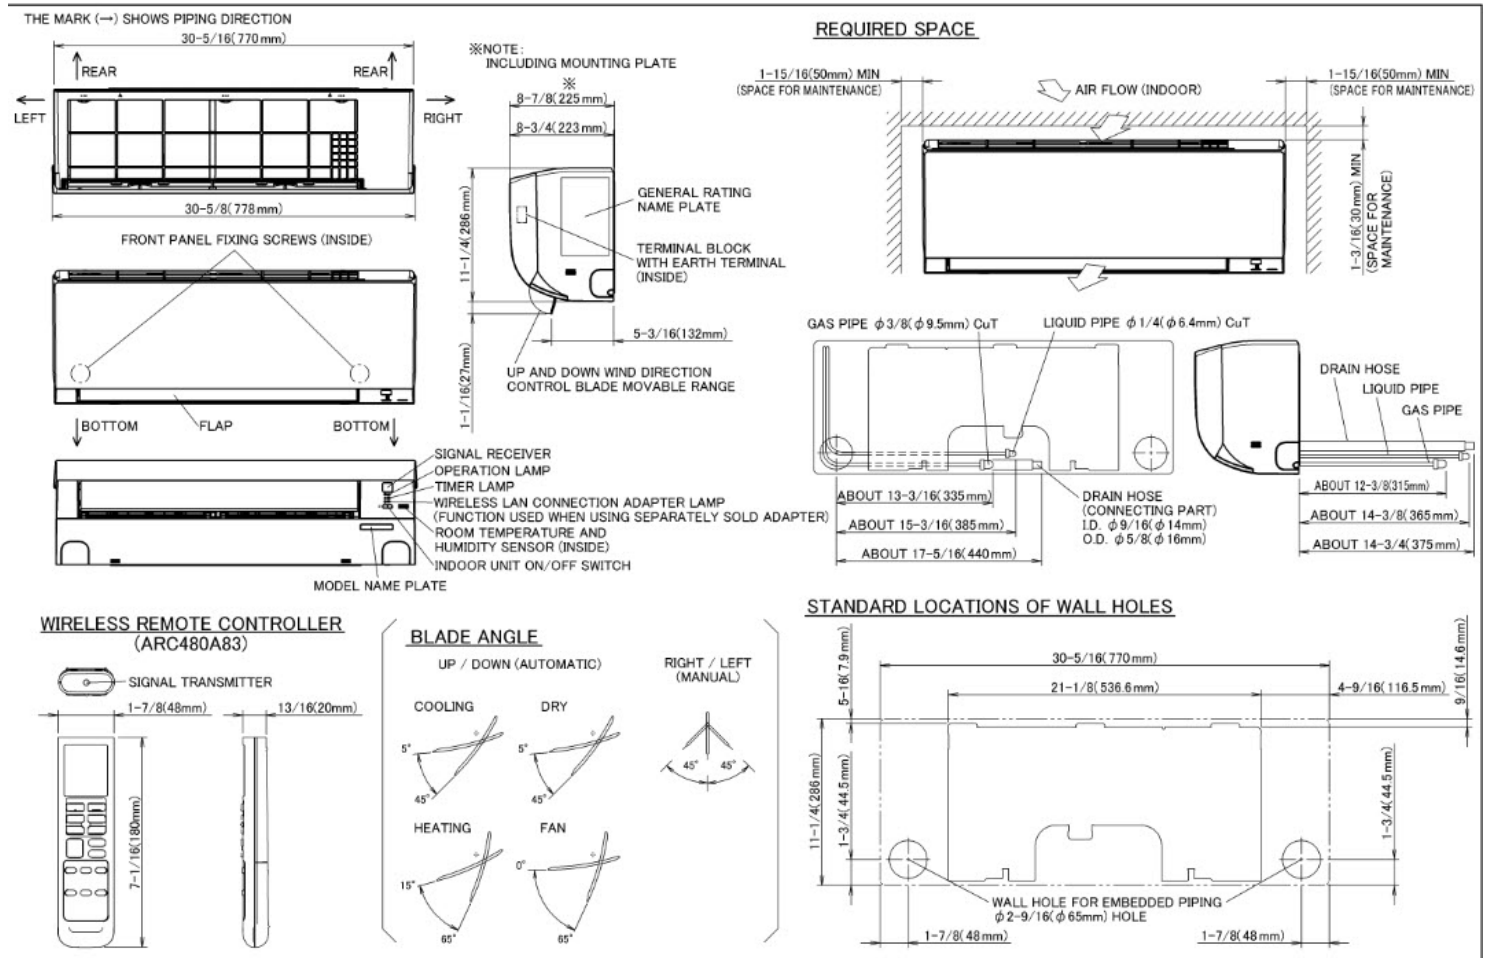

Submittal Data Sheet


Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump

FTXQ09ASBU9RXQ09ASBU9

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	115 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	4	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	14.9	Airflow Rate (H) (CFM):	1233
Max Overcurrent Protection (MOP) (A):	15	Gas Pipe Connection (inch):	3/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	48
Dimensions (HxWxD) (in):	21-15/16 x 26-9/16 x 11-3/16	Sound Power Level (dBA):	
Net Weight (lb):	59		

DIMENSIONAL DRAWING - OUTDOOR UNIT

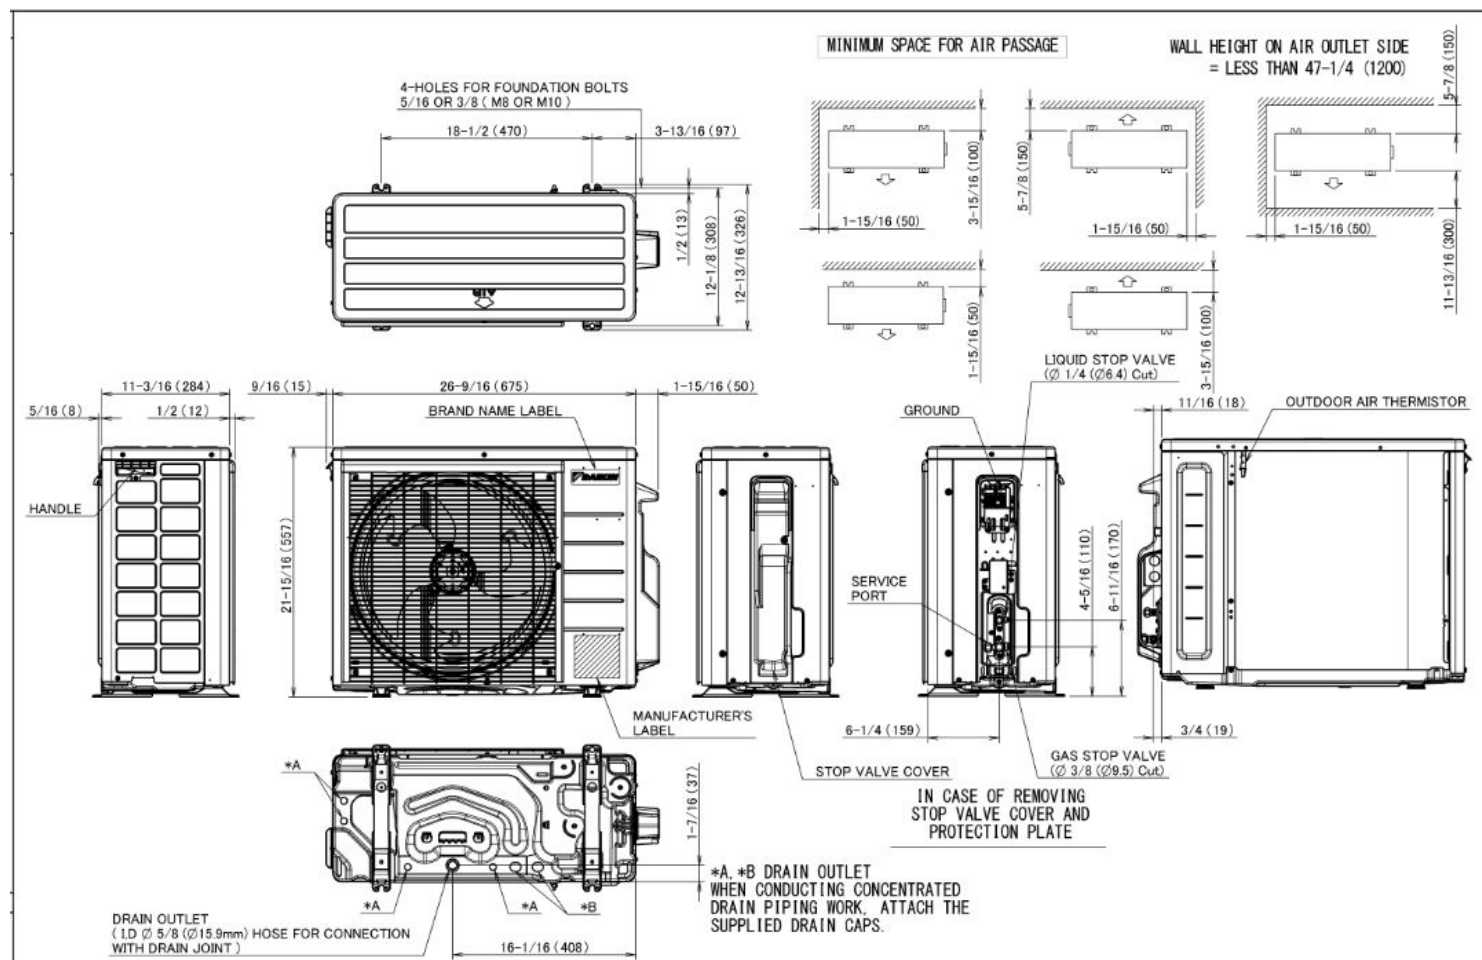



Submittal Data Sheet

Daikin Oterra 115V 0.75 Ton Wall Mounted Unit with Heat Pump
FTXQ09ASBU9RXQ09ASBU9