



Wall Thermostat should be connected
on the unit to be Smart




WATCH OUR
INFORMATIONAL
VIDEO



Outdoor Model			CH-RHP18-230VO	CH-RHP24-230VO	CH-RHP36LCU-230VO	CH-RHP48LCU-230VO	CH-RHP60LCU-230VO	CH-RES18-230VO	CH-RES24-230VO	CH-REL30-230VO	CH-R36LCU-230VO	CH-R48LCU-230VO	CH-R60LCU-230VO
Power Supply	Rated	V, Ph, Hz	208-230, 1, 60	208-230, 1, 60	208-230, 1, 60	208-230, 1, 60	208-230, 1, 60	208-230, 1, 60	208-230, 1, 60	208-230, 1, 60	208-230, 1, 60	208-230, 1, 60	208-230, 1, 60
	Voltage range	V	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253
Cooling	Rated Current	A	9.1	8.7	13.4	22	24	6.7	9.3	12.5	17.4	21.5	25.5
	Rated Capacity Range	Btu/h	6,000~20,400	7,500~27,000	5,700~36,400	7,300~55,500	13,700~58,000	5,600~20,400	6,700~29,600	9,200~34,000	8,900~38,200	9,500~52,000	21,800~57,300
	EER2	Btu/w	12	12	11.7	10	10	12.1	11.7	11	9	10	9.5
	SEER2	Btu/w	18	18.7	17.2	17	15.2	18.5	19.7	17	15.8	17.7	16
Heating at 47°F	Rated Capacity Range	Btu/h	5,000~21,600	8,800~29,000	9,500~44,000	9,500~65,000	10,000~66,100	5,500~21,800	5,800~33,800	8,500~33,000	6,400~43,000	11,700~60,000	11,800~60,300
	COP	W/W	3.64	3.5	3.39	3.5	3.36	3.60	3.53	3.60	3.36	3.5	3.44
	HSPF4	Btu/w	10	10	9.5	10.2	9.2	9.8	9	8.7	9.3	10	9.1
	HSPF5	Btu/w	8.3	8	8	8.1	7.7	7.7	7.3	7	7.3	7.7	7.2
Heating at 5°F (-15°C)	Rated Capacity	Btu/h	18,000	23,600	38,000	46,000	53,000	13,000	18,000	20,400	24,200	35,200	35,400
Minimum Circuit Ampacity (MCA)		A	19	24.9	38	44	44	18	24	28	33	39	42
Max. Fuse		A	20	25	40	45	45	20	25	30	35	40	45
Outdoor Air Flow (Max.)		CFM	1,765.8	2,236.7	3,001.9	4,237.9	4,237.9	1,765.8	2,236.7	2,236.7	2,413.3	4,237.9	4,237.9
Outdoor Noise Level		dB(A)	59	61.5	65.5	65	62	56.5	58.5	61	62.5	65	62.5
Outdoor Unit	Dimension (W×D×H)	inch	35.04x13.46x26.50	37.24x16.14x31.89	38.58x16.34x38.39	37.48x16.34x52.48	37.48x16.34x52.48	35.04x13.46x26.50	37.24x16.14x31.89	37.24x16.14x31.89	37.24x16.14x31.89	37.48x16.34x52.48	37.48x16.34x52.48
	Packing (W×D×H)	inch	39.17x15.67x29.13	42.91x19.68x34.84	45.08x19.68x42.52	43.11x19.49x57.48	43.11x19.49x58.27	39.17x15.67x29.13	42.91x19.68x34.84	42.91x19.68x34.84	42.91x19.68x34.84	43.11x19.49x57.48	43.11x19.49x58.27
	Net/Gross Weight	lbs.	99.87/107.80	130.29/141.31	206.57/237.44	208.78/239.86	230.38/261.69	92.59/100.31	122.13/132.28	142.86/154.54	152.34/162.48	208.78/239.86	209.44/240.08
Refrigerant Type/Quantity		oz.	R454B/55.38	R454B/63.49	R445B/126.99	R445B/126.99	R445B/151.68	R454B/47.97	R454B/70.55	R454B/84.66	R454B/91.71	R454B/126.99	R454B/144.62
Refrigerant Precharge		ft.	25	25	25	25	25	25	25	25	25	25	25
Additional Charge for each ft.		oz./ft.	0.16	0.32	0.32	0.32	0.32	0.16	0.32	0.32	0.32	0.32	0.32
Design Pressure		PSIG	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340
Refrigerant piping Liquid side/Gas Side		inch	1/4" / 1/2"	3/8" / 5/8"	3/8" / 3/4"	3/8" / 3/4"	3/8" / 3/4"	1/4" / 1/2"	3/8" / 5/8"	3/8" / 5/8"	3/8" / 3/4"	3/8" / 3/4"	3/8" / 3/4"
Max. Pipe Length		ft.	98.4	164	246	246	246	98.4	164	164	246	246	213.2
Max. Difference in Level		ft.	65.6	82	98.4	98.4	98.4	65.6	82	82	98.4	98.4	98.4
Ambient Temperature	Cooling	ft.	-22~122	-22~122	5~122	5~122	5~122	-13~122	-13~122	-13~122	-13~122	-13~122	-13~122
	Heating	°F	-22~75	-22~75	-22~75	-22~75	-22~75	-13~75	-13~75	-13~75	-13~75	-13~75	-13~75
Certifications	AHRI		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	ETL		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Energy Star for Cold Climate		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	NEEP		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

MULTI-POSITION AIR HANDLER UNIT

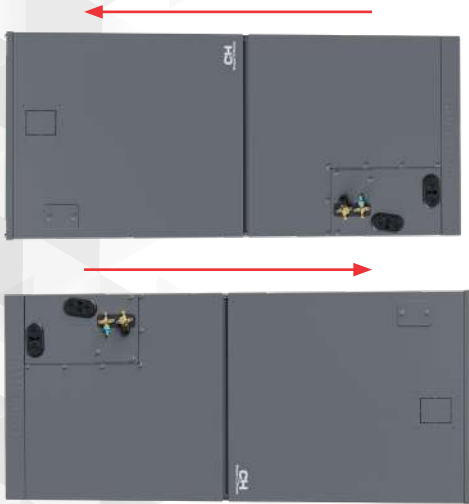

**Horizontal
Installation**



**Vertical
Installation**

The multi-position air handler units have a rating of up to 18.7 SEER2. With the new Inverter Technology used by our outdoor condenser units, the energy efficiency provided by C&H's Air Handlers a great benefit to homeowners.

ELECTRIC HEATERS

OPTIONAL AUXILIARY HEATER

The Auxiliary Heater is an optional feature that can be purchased separately as a back-up heating option for indoor units in case of an emergency or when the primary heating system is not working.




GROUPED HEATER CONTROL FOR MORE PRECISE TEMPERATURE

	5kW heater	10kW heater	15kW heater	20kW heater
AHU Capacity	One group	One group	Two groups	Two groups
	10KW+5KW	10KW+5KW	10KW+5KW	10KW+10KW
	W1 on 5KW	W1 on 10KW	W1 on 10KW	W1 on 10KW
Model	CH-NREH05KW	CH-NREH10KW	CH-NREH15KW	CH-NREH20KW
18K(AHU)	Y	Y	-	-
24K(AHU)	Y	Y	Y	-
30K(AHU)	Y	Y	Y	Y
36K(AHU)	Y	Y	Y	Y
48K(AHU)	-	Y	Y	Y
60K(AHU)	-	Y	Y	Y

	Power	1.5 ton (18,000 BTU/h)	2 ton (24,000 BTU/h)	3 ton (36,000 BTU/h)	4 ton (48,000 BTU/h)	5 ton (60,000 BTU/h)	6 ton (72,000 BTU/h)
Electric Heater	Model	CH-RS18MAHU	CH-RS24MAHU	CH-RS30MAHU	CH-RS36LCAHU	CH-RS48LCAHU	CH-RS60LCAHU
	5KW	Y	Y	Y	Y	-	-
	10KW	Y	Y	Y	Y	Y	Y
	15KW	-	Y	Y	Y	Y	Y
	20KW	-	-	Y	Y	Y	Y

THREE HEATING MODES AVAILABLE FOR DIFFERENT APPLICAT



TECHNICAL SUPPORT
cooperandhunter.us | 786-953-6706

MULTI-POSITION AIR HANDLER

SINGLE & MULTI-ZONE COMPATIBLE AIR CONTITIONER

Your actual Inverter Heat Pump system and related devices may differ from images shown in this specification sheet. Test conditions are based on AHRI 210/240. Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or change specifications or designs at any time without incurring obligations.

© 01.2025 All rights reserved.

SCAN HERE FOR AHU MODELS

