

**Job Name:** \_\_\_\_\_

**Location:** \_\_\_\_\_

**Engineer:** \_\_\_\_\_

**Submitted to:** \_\_\_\_\_

**Submitted by:** \_\_\_\_\_

**Reference:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Approval:** \_\_\_\_\_

**Construction:** \_\_\_\_\_

**Unit #:** \_\_\_\_\_

**Drawing #:** \_\_\_\_\_

## KEY FEATURES:

- Refrigerant Sensor
- Humidity Sensor
- GoldFin Anti-Corrosive Coating
- Multiple Fan Speeds
- Fresh Air Intake
- Omni-Directional Airflow
- Smart-Kit Bult-in on Wall Thermostat
- Inverter technology

## NOTES:


\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_


\_\_\_\_\_





\_\_\_\_\_

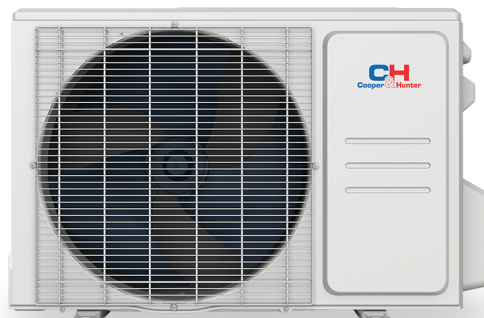

| Indoor Model                                |                    |           | CH-RSH09-12MCT                                |
|---------------------------------------------|--------------------|-----------|-----------------------------------------------|
| Power supply                                |                    | V, Ph, Hz | 208-230V, 1Ph, 60Hz                           |
| Communication wiring                        |                    |           | AWG 14-4                                      |
| Cooling                                     | Capacity           | Btu/h     | 9,000 (3,700~12,000)                          |
|                                             | Input              | W         | 629 (220~1,010)                               |
|                                             | Rated current      | A         | 4.5 (1.6~4.4)                                 |
|                                             | EER/EER2           | Btu/w     | 14.3                                          |
|                                             | SEER/SEER2         | Btu/w     | 21.6                                          |
| Heating at 47 °F                            | Capacity           | Btu/h     | 10,000 (4,700~13,700)                         |
|                                             | Input              | W         | 733 (270~1,110)                               |
|                                             | Rated current      | A         | 3.3 (1.4~4.9)                                 |
|                                             | COP                | W/W       | 4                                             |
|                                             | HSPF4/HSPF2-4      |           | 11.3                                          |
|                                             | HSPF5/HSPF2-5      |           | 8.8                                           |
| Indoor fan motor                            |                    | Qty       | 1                                             |
|                                             |                    | Input (W) | 45                                            |
|                                             |                    | RLA (A)   | 0.8                                           |
| Indoor air flow (Turbo/Hi/Med/Lo) (No duct) |                    | CFM       | 353.2 / 312 / 264.9 / 182.5                   |
| ESP (range)                                 |                    | In.wg.    | /                                             |
| Indoor noise level (Hi/Med/Lo)              |                    | dB(A)     | 40/37/26                                      |
| Dehumidification                            |                    | Pnt/H     | 1.56                                          |
| Indoor unit                                 | Dimensions (WxDxH) | inch      | 22.44 x 22.44 x 9.65                          |
|                                             | Packing (WxDxH)    | inch      | 28.15 x 25.20 x 11.61                         |
|                                             | Net/Gross weight   | lbs       | 35.27/41.89                                   |
| Drainage water pipe diameter                |                    | inch      | 1"                                            |
| Refrigerant piping (Liquid side/Gas side)   |                    | inch      | 1/4"/3/8"                                     |
| Design pressure                             |                    | PSIG      | 550/340                                       |
| Controller                                  |                    |           | wire controller + remote controller available |
| Room temperature                            | Cooling            | F         | 60~90                                         |
|                                             | Heating            | F         | 32~86                                         |

| Outdoor Model                              |                          |           | CH-RES09-230VO        |
|--------------------------------------------|--------------------------|-----------|-----------------------|
| Power supply                               |                          | V, Ph, Hz | 208-230V, 1Ph, 60Hz   |
| Min. circuit ampacity                      |                          | A         | 12                    |
| Max. fuse                                  |                          | A         | 15                    |
| Compressor                                 | Model                    |           | KSK103D33UEZ3         |
|                                            | Type                     |           | ROTARY                |
|                                            | Brand                    |           | GMCC                  |
|                                            | Capacity                 | Btu/h     | 11,100                |
|                                            | Input                    | W         | 826                   |
|                                            | Rated current (RLA)      | A         | 7.3                   |
|                                            | Refrigerant oil          | oz        | VG74 10.5             |
| Outdoor fan motor                          | Qty                      |           | 1                     |
|                                            | Input                    | W         | 34                    |
|                                            | RLA                      | A         | 0.6                   |
|                                            | Speed                    | r/min     | 800/700/600           |
| Outdoor air flow (Max)                     |                          | CFM       | 1,236.1               |
| Outdoor noise level (Max)                  |                          | dB(A)     | 54.5                  |
| Throttle type                              |                          |           | EXV                   |
| Outdoor unit                               | Dimensions (WxDxH)       | inch      | 30.12 x 11.93 x 21.85 |
|                                            | Packing (WxDxH)          | inch      | 34.92 x 13.27 x 24.02 |
|                                            | Net/Gross weight         | lbs       | 62.17/67.68           |
| Refrigerant                                | Type                     |           | R454B                 |
|                                            | Precharge                | ft        | 25                    |
| Additional charge for 1/4 inch liquid pipe |                          | oz        | 0.16                  |
| Additional charge for 3/8 inch liquid pipe |                          | oz        | /                     |
| Refrigerant piping                         | Liquid side/Gas side     | inch      | 1/4"/3/8"             |
|                                            | Max. pipe length         | ft        | 82                    |
|                                            | Max. difference in level | ft        | 49.2                  |
| Ambient temperature                        | Cooling                  | F         | -13 ~ 122             |
|                                            | Heating                  | F         | -13~75                |

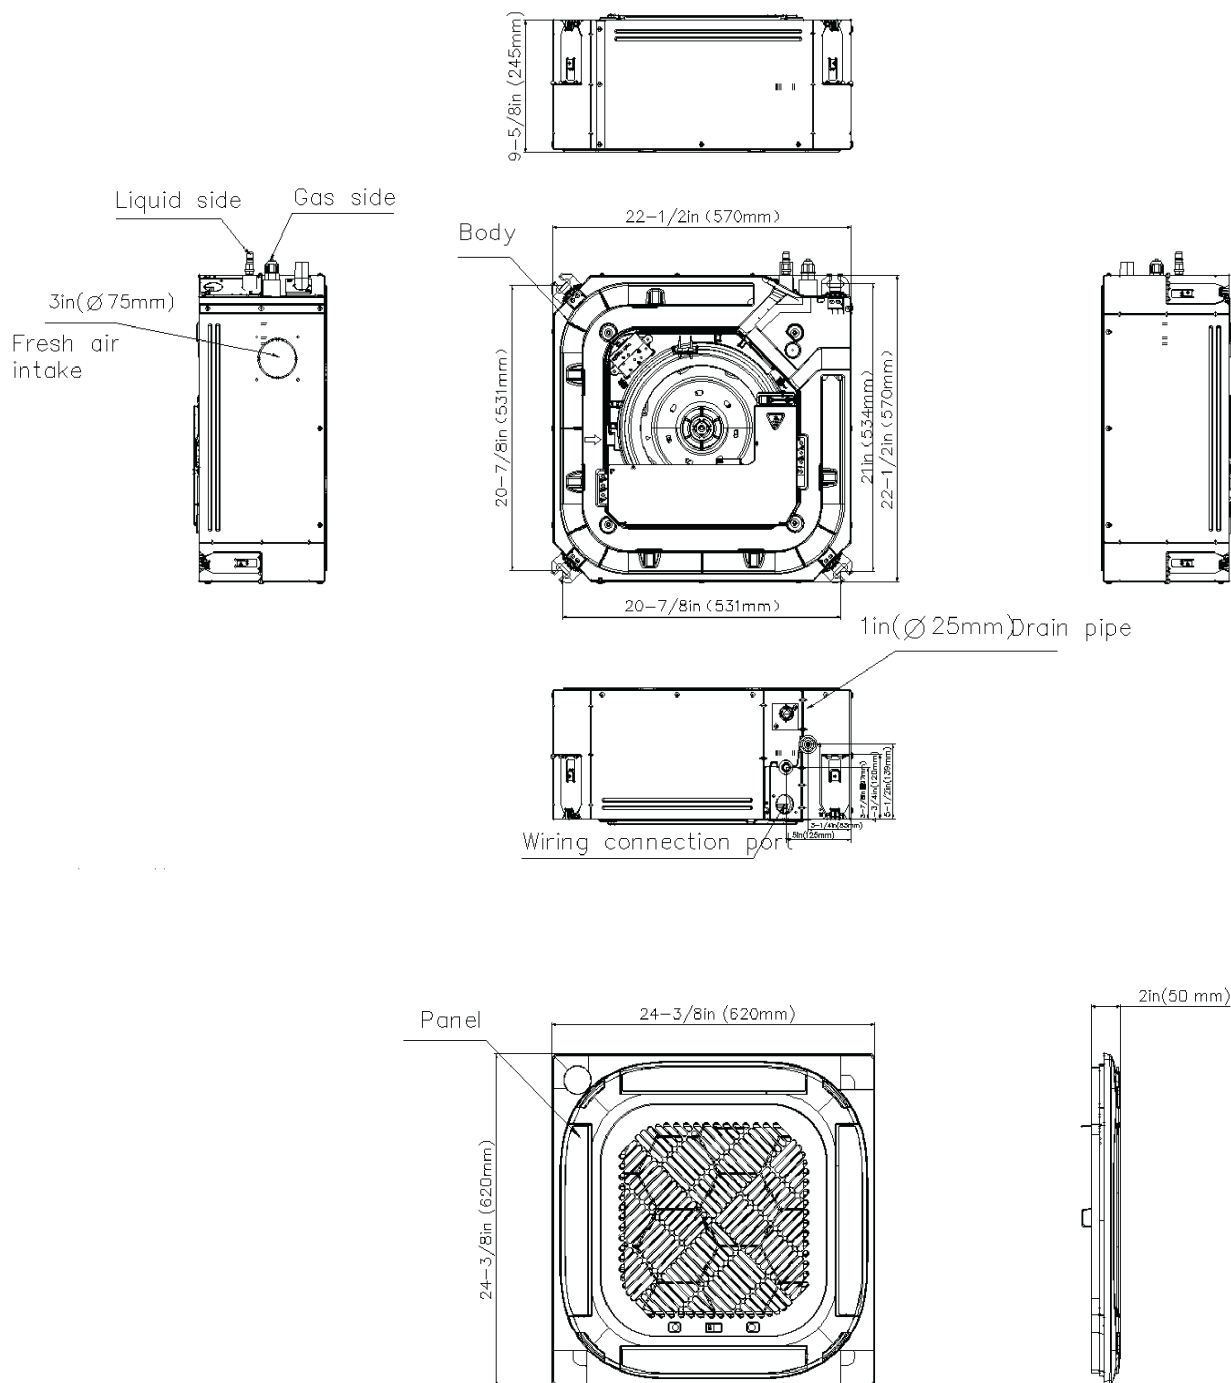

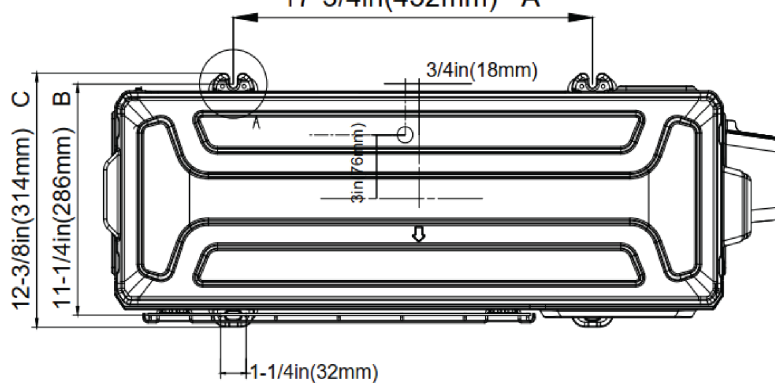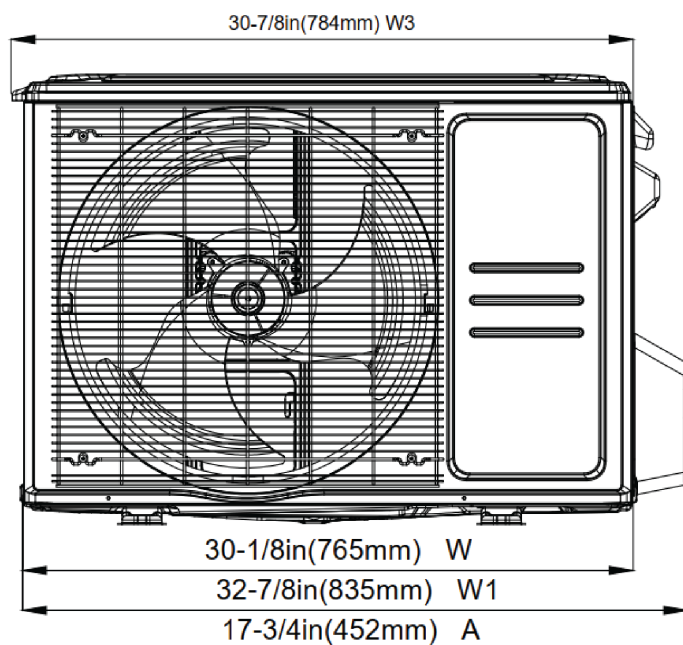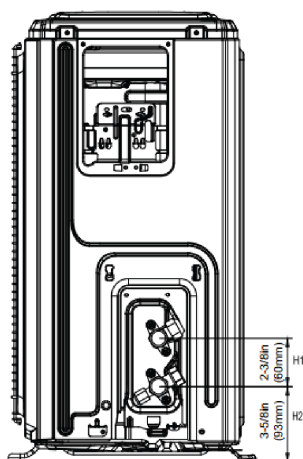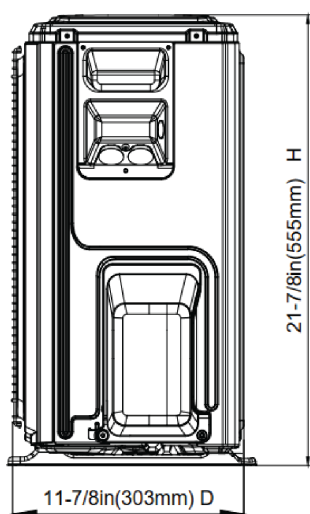

**DETAIL A**  
**SCALE 1:2**

