

Job Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Date: _____

Approval: _____

Construction: _____



Unit #: _____

Drawing #: _____

KEY FEATURES:

- Dip Switch 6k to 12K Btu
- Refrigerant Sensor
- GoldFin Anti-Corrosive Coating
- Humidity Sensor
- Built-in Circuit Breaker
- Built-in water pump
- Smart Kit Built-in

NOTES:

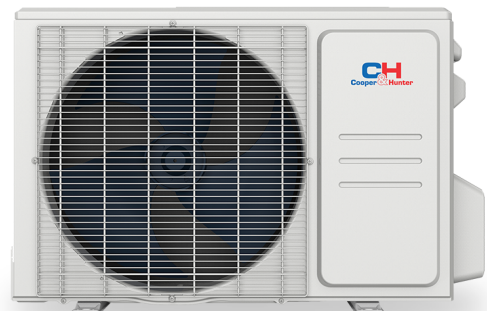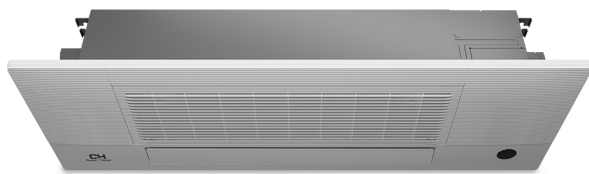


Indoor Model			CH-RSH18MCT1W
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Communication wiring			AWG 14-4
Cooling	Capacity	Btu/h	18,000 (4,000~18,800)
	Input	w	1,440 (450~1,660)
	Rated current	A	6.4 (2.1~7.3)
	EER/EER2	Btu/w	12.5
	SEER/SEER2	Btu/w	22.2
Heating at 47 °F	Capacity	Btu/h	18,000 (7,600~22,800)
	Input	W	1,600 (400~1,880)
	Rated current	A	7.1 (2.2~8.3)
	COP	W/W	3.3
	HSPF4/HSPF2-4		12.2
	HSPF5/HSPF2-5		8.6
Indoor fan motor		Qty	1
		Input	30
		RLA	1.2
Indoor air flow (Turbo/Hi/Med/Lo) (No duct)		CFM	400.2 / 352 / 300.2 / 207.2
ESP (range)		ln.wg.	/
Indoor noise level (Hi/Med/Lo)		dB(A)	44/41/29.5
Dehumidification		L/H	4.40
Indoor unit	Dimensions (WxDxH)	inch	50.31 x 13.19 x 8.98
	Packing (WxDxH)	inch	57.60 x 22.48 x 22.64
	Net/Gross weight	lbs	45.19/82.89
Drainage water pipe diameter		inch	3/4"
Refrigerant piping (Liquid side/Gas side)		inch	1/4"/1/2"
Design pressure		PSIG	550/340
Controller			wire controller + remote controller available
Room temperature	Cooling	F	60~90
	Heating	F	32~86

Outdoor Model			CH-RES18-230VO
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Min. circuit ampacity		A	18
Max. fuse		A	20
Compressor	Model		KSN140D58UFZ
	Type		ROTARY
	Brand		GMCC
	Capacity	Btu/h	14,720
	Input	w	1,090
	Rated current (RLA)	A	10
	Refrigerant oil	oz	VG74 14.9
Outdoor fan motor	Qty		1
	Input	w	80
	RLA	A	0.9
	Speed	r/min	780/700/550
Outdoor air flow (Max)		CFM	1,765.8
Outdoor noise level (Max)		dB(A)	57.5
Throttle type			EXV+Throttle valve
Outdoor unit	Dimensions (WxDxH)	inch	35.04 x 13.46 x 26.5
	Packing (WxDxH)	inch	39.17 x 15.67 x 29.13
	Net/Gross weight	inch	92.59/100.31
Refrigerant	Type		R454B
	Precharge	ft	25
Additional charge for 1/4 inch liquid pipe		oz	0.16
Additional charge for 3/8 inch liquid pipe		oz	/
Refrigerant piping	Liquid side/Gas side	inch	1/4"/1/2"
	Max. pipe length	ft	98.4
	Max. difference in level	ft	65.6
Ambient temperature	Cooling	F	-13 ~ 122
	Heating	F	-13~75

Installation place

(unit: inch/mm)

Perspective A

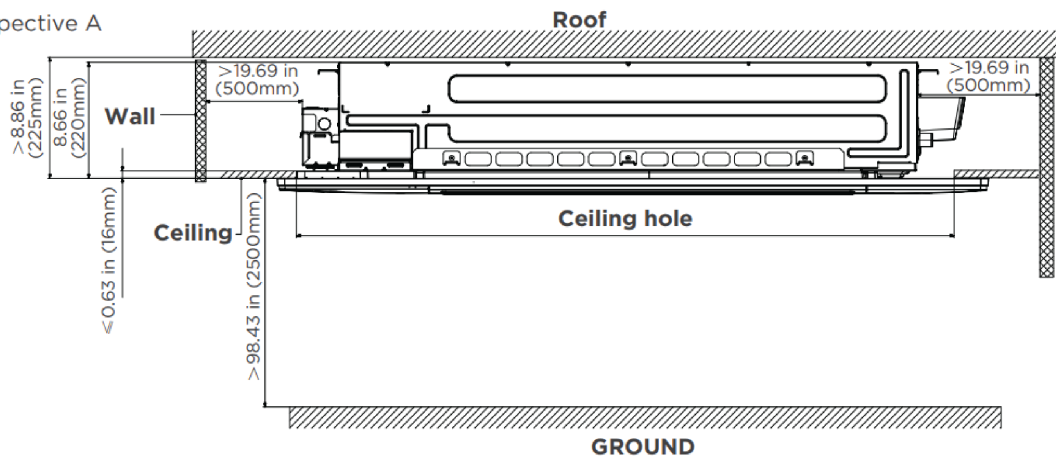

Perspective B

