


**Job Name:** \_\_\_\_\_  
**Location:** \_\_\_\_\_  
**Engineer:** \_\_\_\_\_  
**Submitted to:** \_\_\_\_\_  
**Submitted by:** \_\_\_\_\_  
**Reference:** \_\_\_\_\_

**Date:** \_\_\_\_\_  
**Approval:** \_\_\_\_\_  
**Construction:** \_\_\_\_\_  
**Unit #:** \_\_\_\_\_  
**Drawing #:** \_\_\_\_\_

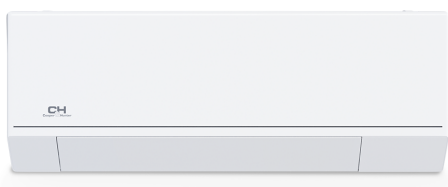


## KEY FEATURES:

- Single or Multi-Zone Application
- Humidity Sensor
- Easy access E-Box and PCB
- Easy-to-remove blower wheel
- Auto-Swing for vertical and horizontal louvers
- Smart Kit Included
- Can be installed up to 2" from ceiling
- Compatible with Regular and Hyper Heat Outdoor units



## SPECIFICATIONS:

|                                                |                   |           |                               |
|------------------------------------------------|-------------------|-----------|-------------------------------|
| Indoor Model                                   |                   |           | CH-RH06MASTWM-230VI           |
| Power Supply                                   | Rated             | V, Ph, Hz | 208-230V, 1Ph, 60Hz           |
| Cooling                                        | Rated Capacity    | Btu/h     | 6,000                         |
| Heating                                        | Rated Capacity    | Btu/h     | 7,000                         |
| Minimum Circuit Ampacity (MCA)                 |                   | A         | 3                             |
| Max. Fuse                                      |                   | A         | 15                            |
| Indoor Air Flow (Hi/Mi/Lo)                     |                   | CFM       | 382.6 / 323.7 / 229.6 / 176.6 |
| Indoor Noise Level (Hi/Mi/Lo)                  |                   | dB(A)     | 36.5/32.5/22                  |
| External static pressure (SlimDuct/AHU only)   |                   | in. WG    |                               |
| Drainage water pipe diameter                   |                   | inch      | 5/8"                          |
| Diameter of refrigerant pipe (Liquid/Gas Side) |                   | Inch      | 1/4"/3/8"                     |
| Dehumidification                               |                   | Pnt/H     | 0.63                          |
| Communication wiring                           |                   |           | AWG 14-4                      |
| Indoor                                         | Dimension (W×D×H) | Inch      | 33.74 x 9.09 x 11.81          |
|                                                | Packing (W×D×H)   | Inch      | 36.22x12.20x14.57             |
|                                                | Net/Gross Weight  | lbs       | 22.93/29.32                   |

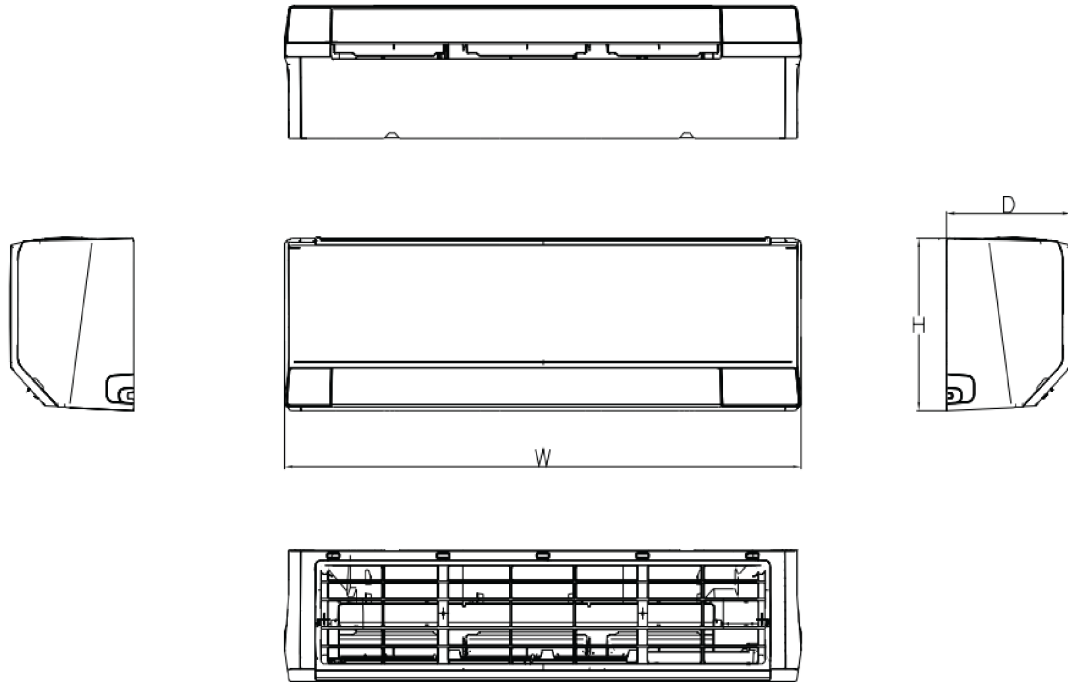

| Capacity | Body Code | Unit | W      | D     | H      |
|----------|-----------|------|--------|-------|--------|
| 6k~12k   | B         | mm   | 857    | 231   | 300    |
|          |           | inch | 33-3/4 | 9-1/8 | 11-3/4 |
| 18k      | C         | mm   | 1024   | 246   | 321    |
|          |           | inch | 40-1/4 | 9-3/4 | 12-5/8 |
| 24k~36k  | D         | mm   | 1197   | 280   | 371    |
|          |           | inch | 47-1/8 | 11    | 14-5/8 |