


Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____

KEY FEATURES:


- Can be installed up to 2' from the ceiling
- E-Box and PCB located in the front of the unit with a cover kickstand providing easy access
- Revolutionary design offers convenient disassembly & maintenance with an easy-to-remove blower wheel
- Larger air inlet/outlet for improved air flow
- Auto-Swing for vertical and horizontal louvers
- Easy to remove magnetic filter on top
- Compatible with regular (-13°F) or Hyper (-22°F) outdoor units


NOTES:

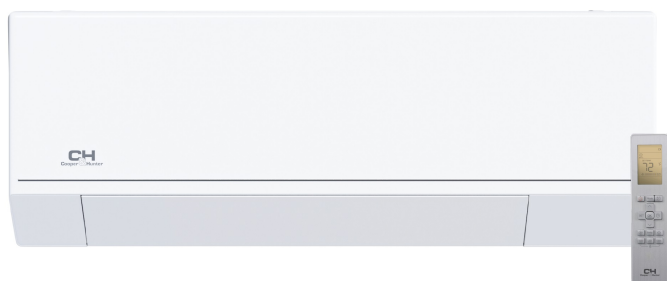

Indoor Model			CH-RH18MASTWM-230VI
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Communication wiring			AWG 14-4
Cooling	Capacity	Btu/h	18,000 (8,800~19,400)
	Input	W	1,440 (230~1,680)
	Rated current	A	6.4 (2.5~7.4)
	EER/EER2	Btu/w	12.5
	SEER/SEER2	Btu/w	21.4
Heating at 47 °F	Capacity	Btu/h	18,000 (11,200~19,500)
	Input	W	1,618 (770~2,050)
	Rated current	A	7.2 (4.2~9)
	COP	W/W	3.26
	HSPF4/HSPF2-4		11
	HSPF5/HSPF2-5		8.5
Indoor fan motor		Qty	1
		Input (W)	30
		RLA (A)	0.8
Indoor air flow (Turbo/Hi/Med/Lo) (No duct)		CFM	635.7 / 500.3 / 359.0 / 294.3
ESP (range)		In.wg.	
Indoor noise level (Hi/Med/Lo)		dB(A)	45/38/31.5
Dehumidification		Pnt/H	4.65
Indoor unit	Dimensions (WxDxH)	inch	40.31 x 9.69 x 12.64
	Packing (WxDxH)	inch	43.11x12.80x15.75
	Net/Gross weight	lbs	27.34/36.60
Drainage water pipe diameter		inch	5/8"
Refrigerant piping (Liquid side/Gas side)		inch	1/4"/1/2"
Design pressure		PSIG	550/340
Controller			wire controller + remote controller available
Room temperature	Cooling	F	60~90
	Heating	F	32~86

Outdoor Model			CH-RHP18-230VO
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Min. circuit ampacity		A	19
Max. fuse		A	20
Compressor	Model		KTM240D46UKT2
	Type		ROTARY
	Brand		GMCC
	Capacity	Btu/h	25,930
	Input	W	2,045
	Rated current (RLA)	A	11.7
	Refrigerant oil	oz	VG74 21
Outdoor fan motor	Qty		1
	Input	W	80
	RLA	A	0.9
	Speed	r/min	780/700/550
Outdoor air flow (Max)		CFM	1,764.7
Outdoor noise level (Max)		dB(A)	59
Throttle type			EXV+Throttle valve
Outdoor unit	Dimensions (WxDxH)	inch	35.04 x 13.46 x 26.50
	Packing (WxDxH)	inch	39.17 x 15.67 x 29.13
	Net/Gross weight	inch	99.87/107.80
Refrigerant	Type		R454B
	Precharge	ft	25
Additional charge for 1/4 inch liquid pipe		oz	0.16
Additional charge for 3/8 inch liquid pipe		oz	/
Refrigerant piping	Liquid side/Gas side	inch	1/4"/1/2"
	Max. pipe length	ft	98.4
	Max. difference in level	ft	65.6
Ambient temperature	Cooling	F	-22 ~ 122
	Heating	F	-22~75

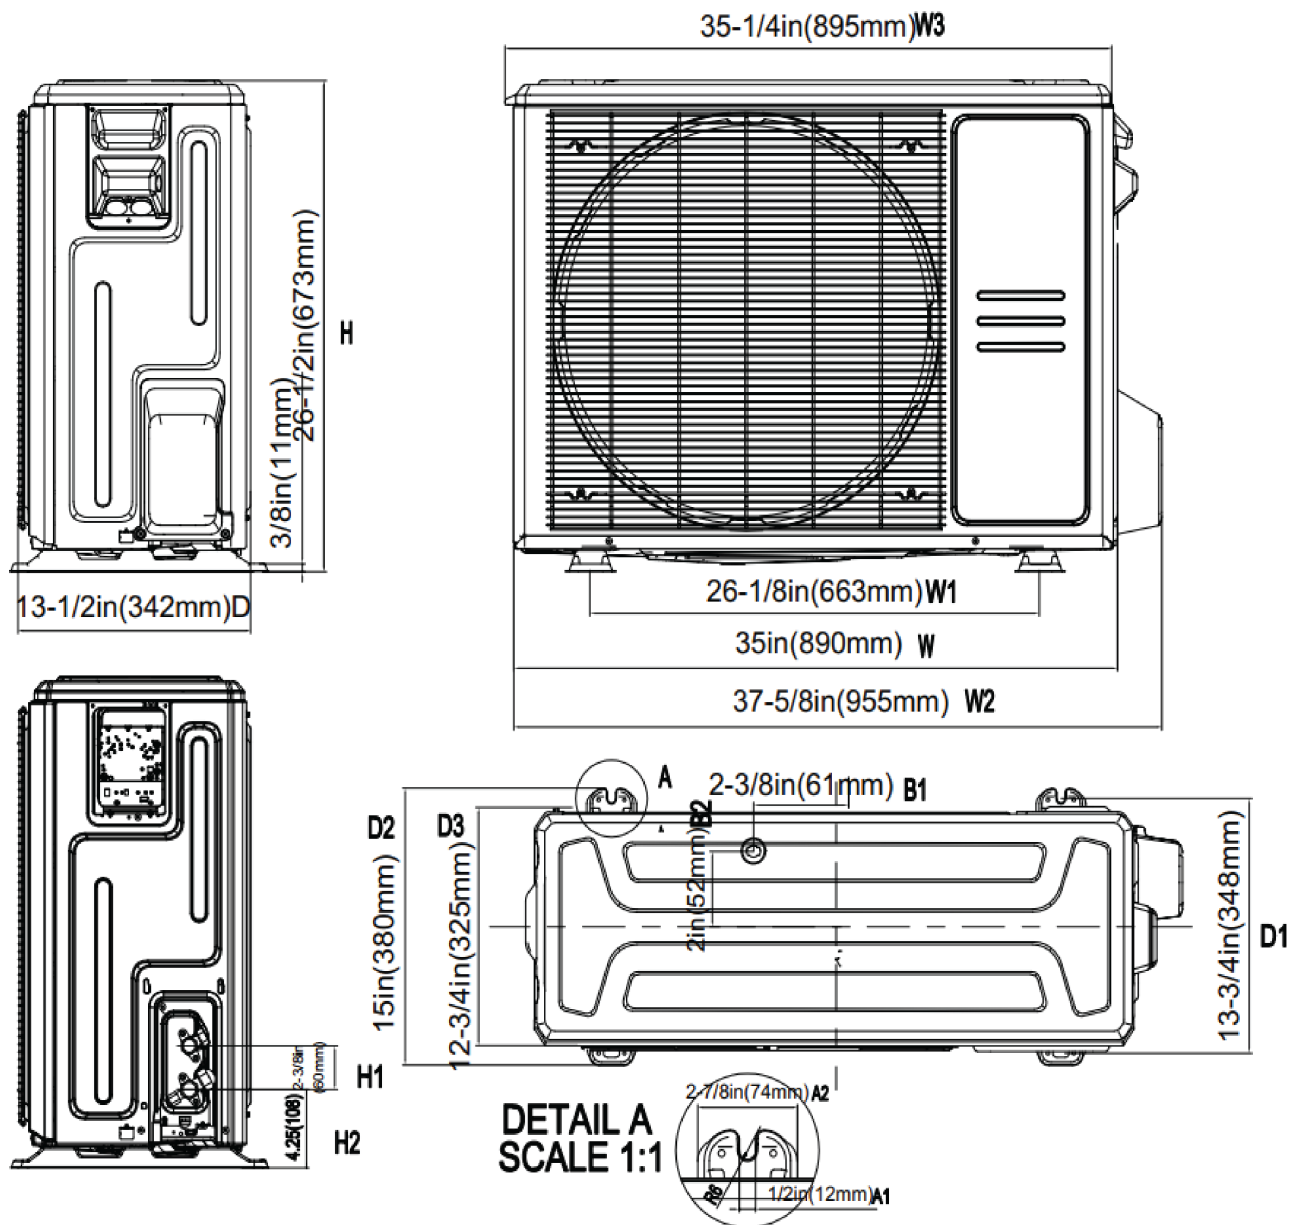

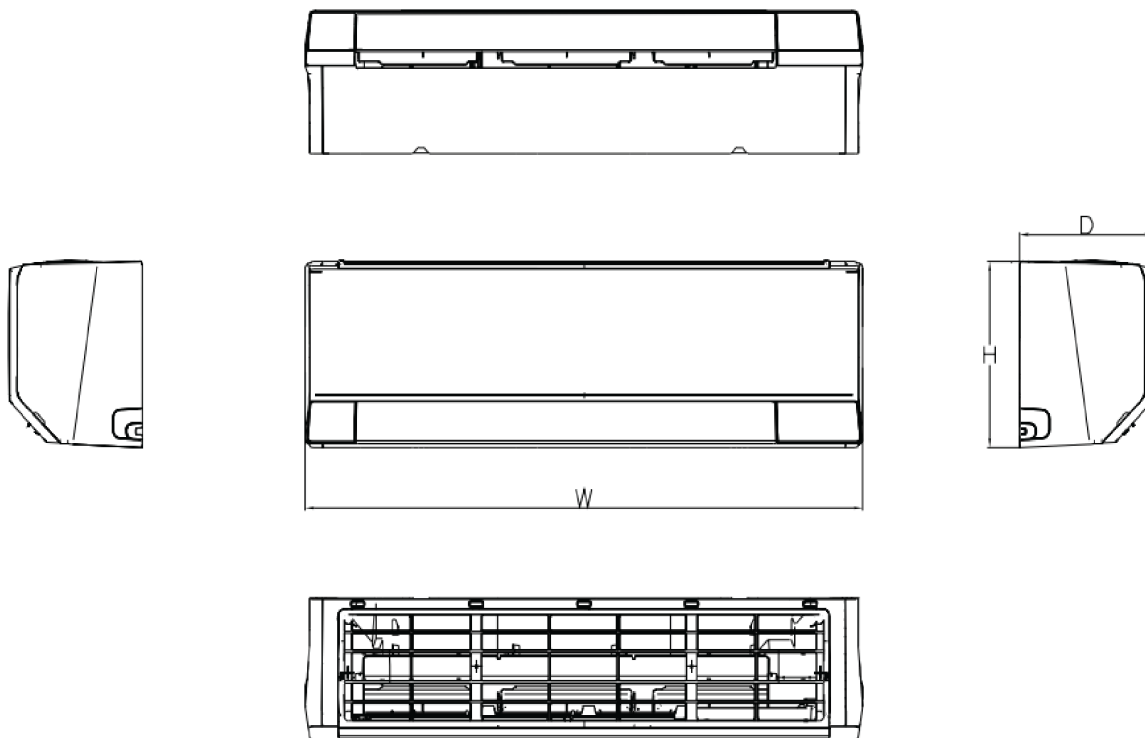

Capacity	Body Code	Unit	W	D	H
6k~12k	B	mm	857	231	300
		inch	33-3/4	9-1/8	11-3/4
18k	C	mm	1024	246	321
		inch	40-1/4	9-3/4	12-5/8
24k~36k	D	mm	1197	280	371
		inch	47-1/8	11	14-5/8