


Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____

KEY FEATURES:


- Flexible Installation
- Compatible with Regular or Hyper Heat Pump
- SmartPort Ready
- Wall Thermostat Included
- Remote Control Included

NOTES:

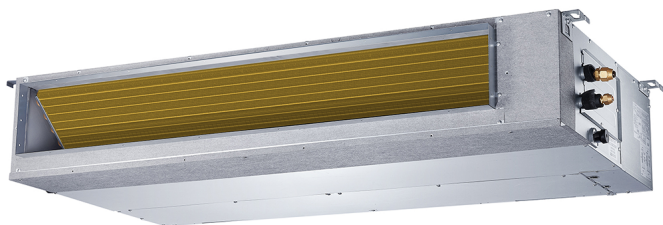

Indoor Model			CH-RS48LCDT-HS
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Communication wiring			AWG 14-3
Cooling	Capacity	Btu/h	48,000 (11,000~56,500)
	Input	W	4,610 (930~6,050)
	Rated current	A	19.9 (4.1~26.6)
	EER/EER2	Btu/w	10.4
	SEER/SEER2	Btu/w	16.7
Heating at 47 °F	Capacity	Btu/h	52,000 (11,200~60,000)
	Input	W	4,230 (770~5,380)
	Rated current	A	19 (4.2~23.6)
	COP	W/W	3.6
	HSPF4/HSPF2-4		10.8
	HSPF5/HSPF2-5		8.8
Indoor fan motor		Qty	1
		Input (W)	560
		RLA (A)	4
Indoor air flow (Turbo/Hi/Med/Lo) (No duct)		CFM	1,648.1 / 1,471.5 / 1,294.9 / 1,059.5
ESP (range)		In.wg.	0-0.8
Indoor noise level (Hi/Med/Lo)		dB(A)	51/46/42
Dehumidification		Pnt/H	8.92
Indoor unit	Dimensions (WxDxH)	inch	47.24 x 29.53 x 11.81
	Packing (WxDxH)	inch	56.10 x 33.86 x 14.13
	Net/Gross weight	lbs	111.33/124.78
Drainage water pipe diameter		inch	1"
Refrigerant piping (Liquid side/Gas side)		inch	3/8"/3/4"
Design pressure		PSIG	550/340
Controller			wire controller + remote controller available
Room temperature	Cooling	F	60~90
	Heating	F	32~86

Outdoor Model			CH-RHP48LCU-230VO
Power supply		V, Ph, Hz	208-230V, 1Ph, 60Hz
Min. circuit ampacity		A	44
Max. fuse		A	45
Compressor	Model		EKPQ420D1UMUA
	Type		TWIN-ROTARY
	Brand		GMCC
	Capacity	Btu/h	40,940
	Input	W	3,265
	Rated current (RLA)	A	27
	Refrigerant oil	oz	VG75 49.4
Outdoor fan motor	Qty		2
	Input	W	85
	RLA	A	1.2
	Speed	r/min	1,000/950/880
Outdoor air flow (Max)		CFM	4,237.9
Outdoor noise level (Max)		dB(A)	65
Throttle type			EXV+Throttle valve
Outdoor unit	Dimensions (WxDxH)	inch	37.48 x 16.34 x 52.48
	Packing (WxDxH)	inch	43.11 x 19.49 x 57.48
	Net/Gross weight	inch	208.78/239.86
Refrigerant	Type		R454B
	Precharge	ft	25
Additional charge for 1/4 inch liquid pipe		oz	
Additional charge for 3/8 inch liquid pipe		oz	0.32
Refrigerant piping	Liquid side/Gas side	inch	3/8"/3/4"
	Max. pipe length	ft	246
	Max. difference in level	ft	98.4
Ambient temperature	Cooling	F	-22 ~ 122
	Heating	F	-22~75

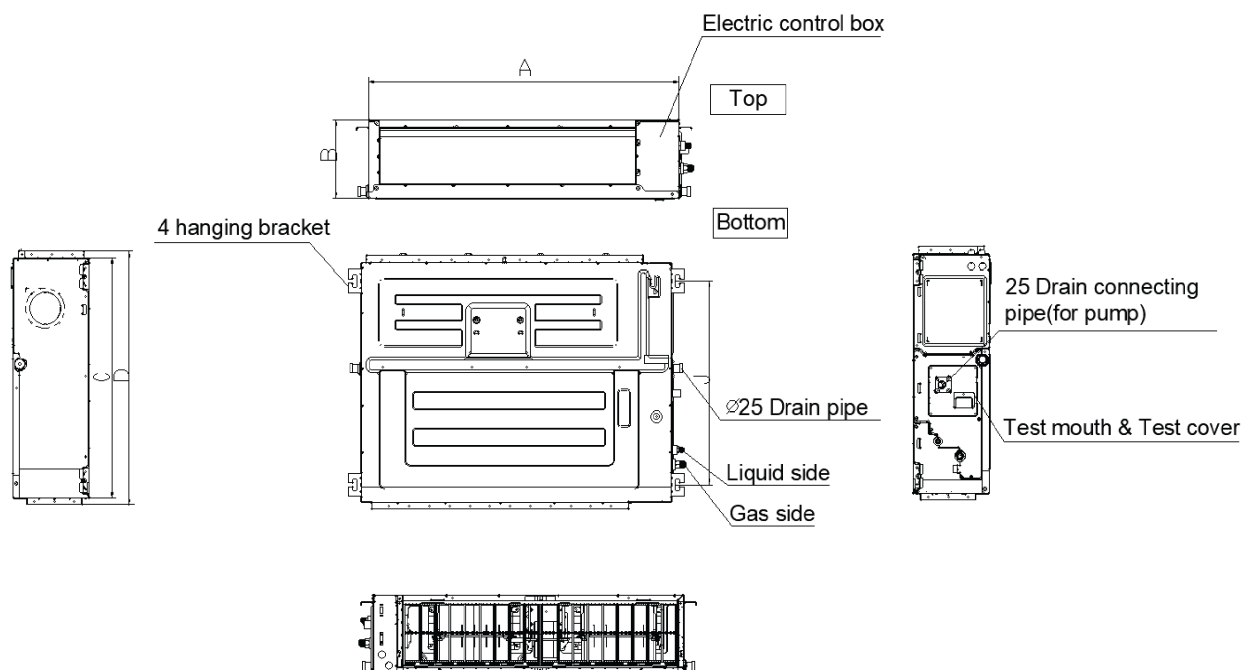

MODEL	A	B	C	D
9K	27-1/2in(700mm)	7-7/8in(200mm)	17-3/4(450mm)	20in(506mm)
12K	27-1/2in(700mm)	9-5/8in(245mm)	29-1/2(750mm)	31-1/4in(795mm)
18K~24K	39-3/8in(1000mm)	9-5/8in(245mm)	29-1/2(750mm)	31-1/4in(795mm)
36K~48K	47-1/8in(1200mm)	11-7/8in(300mm)	29-1/2(750mm)	31-1/4in(795mm)
60K	55-1/8in(1400mm)	15in(380mm)	31-1/2in(800mm)	33-1/4in(845mm)

