

High Wall Heat Pump Ductless System

Indoor Model: D5FEHAH12XCJ

Job Data:   
Tag #:   
Date:


Location:   
Carrier#:



- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
  - Four fan speeds
  - Sleep Mode
  - Turbo Mode
  - Follow Me (senses temperature at handheld remote)
  - Auto-Restart function
  - Quiet indoor operation
  - Anti-corrosive fin coating
  - Pipe Connection Size - Liquid: 1/4in (6.35mm)
  - Pipe Connection Size - Suction: 3/8in (9.52mm)

- LIMITED WARRANTY\***
- Seven (7) years compressor and five (5) years parts warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

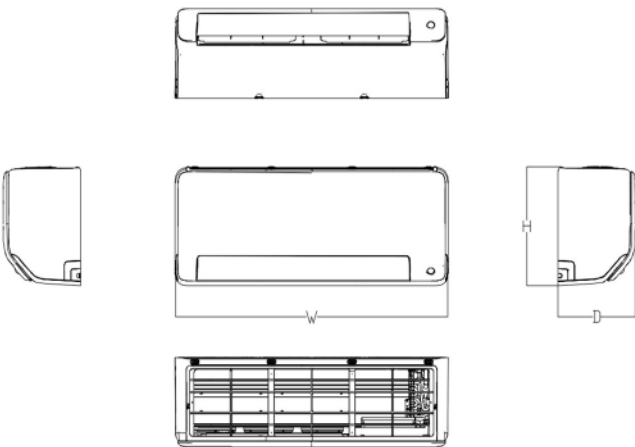

| INDOOR UNIT DIMENSIONS |      |       |       |       |
|------------------------|------|-------|-------|-------|
| Capacity               | Unit | W     | D     | H     |
| 9K                     | mm   | 729   | 200   | 292   |
|                        | inch | 28.7  | 7.87  | 11.5  |
| 12K                    | mm   | 802   | 200   | 295   |
|                        | inch | 31.57 | 7.87  | 11.61 |
| 18K                    | mm   | 971   | 228   | 321   |
|                        | inch | 38.23 | 8.98  | 12.64 |
| 24K                    | mm   | 1082  | 234   | 337   |
|                        | inch | 42.6  | 9.21  | 13.27 |
| 30K/36K                | mm   | 1259  | 283   | 362   |
|                        | inch | 49.57 | 11.14 | 14.25 |

| D5FEHAH12XCJ    |                                                |                                      |                     |
|-----------------|------------------------------------------------|--------------------------------------|---------------------|
| System          | Indoor Model #                                 |                                      | D5FEHAH12XCJ        |
|                 | Indoor Size                                    |                                      | 12000               |
| Electrical      | Voltage, Phase, Cycle                          | V/Ph/Hz                              | 115/1/60            |
|                 | Power Supply                                   | Indoor unit powered by outdoor unit. |                     |
|                 | MCA                                            | A.                                   | 3                   |
| Operating Range | Cooling Indoor DB Min - Max                    | *F(*C)                               | 60~90(16~32)        |
|                 | Heating Indoor DB Min - Max                    | *F(*C)                               | 32~86(0~30)         |
| Indoor Coil     | Face Area                                      | Sq. Ft.                              | 2.05                |
|                 | No. Rows                                       |                                      | 2                   |
|                 | Fins per inch                                  |                                      | 20                  |
|                 | Circuits                                       |                                      | 2                   |
| Indoor Unit     | Number of Fan Speeds                           |                                      | 850/750/450         |
|                 | Airflow (highest to lowest)                    | CFM                                  | 294.3/235.4/176.6   |
|                 | Sound Pressure (highest to lowest)             | dB(A)                                | 41.0/37.0/27.5/18.5 |
|                 | Moisture Removal                               | L/h                                  | 1.3                 |
|                 | Air Throw Data                                 | ft(m)                                | 21.33(6.5)          |
| Dimensions      | Height                                         | in (mm)                              | 11.61(295)          |
|                 | Width                                          | in (mm)                              | 31.57(802)          |
|                 | Depth                                          | in (mm)                              | 7.87(200)           |
|                 | Net Weight                                     | lbs (kg)                             | 19.4(8.8)           |
|                 | Shipping Height                                | in (mm)                              | 14.96(380)          |
|                 | Shipping Width                                 | in (mm)                              | 34.45(875)          |
|                 | Shipping Depth                                 | in (mm)                              | 11.22(285)          |
|                 | Shipping Net Weight                            | lbs (kg)                             | 25.57(11.6)         |
| CONTROLS        |                                                |                                      |                     |
| Standard        | Wireless Remote Controller (*F/*C Convertible) |                                      |                     |
| Optional        | Wired Remote Control 7 Day Programmable        |                                      | KSACN1401AAA        |
|                 | Wired Remote Control with Timer Function       |                                      | KSACN1201AAA        |
|                 | Wi-Fi™ Kit High Wall                           |                                      | KSAIF0701AAA        |
|                 | 24V Mini Interface                             |                                      | KSAIC0601230        |



R-454B