

Air Handler Heat Pump Ductless System

Indoor Model: D5FLAAH60XAK

Job Data:

Tag #:

Date:

Location:

Carrier#:




INDOOR STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- 4-way installation (Up flow, Down flow, Right, Left)
- Auto-Restart function
- Quiet indoor operation
- Aluminum hydrophilic pre-coated fins

RESIDENTIAL APPLICATION LIMITED WARRANTY*


- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

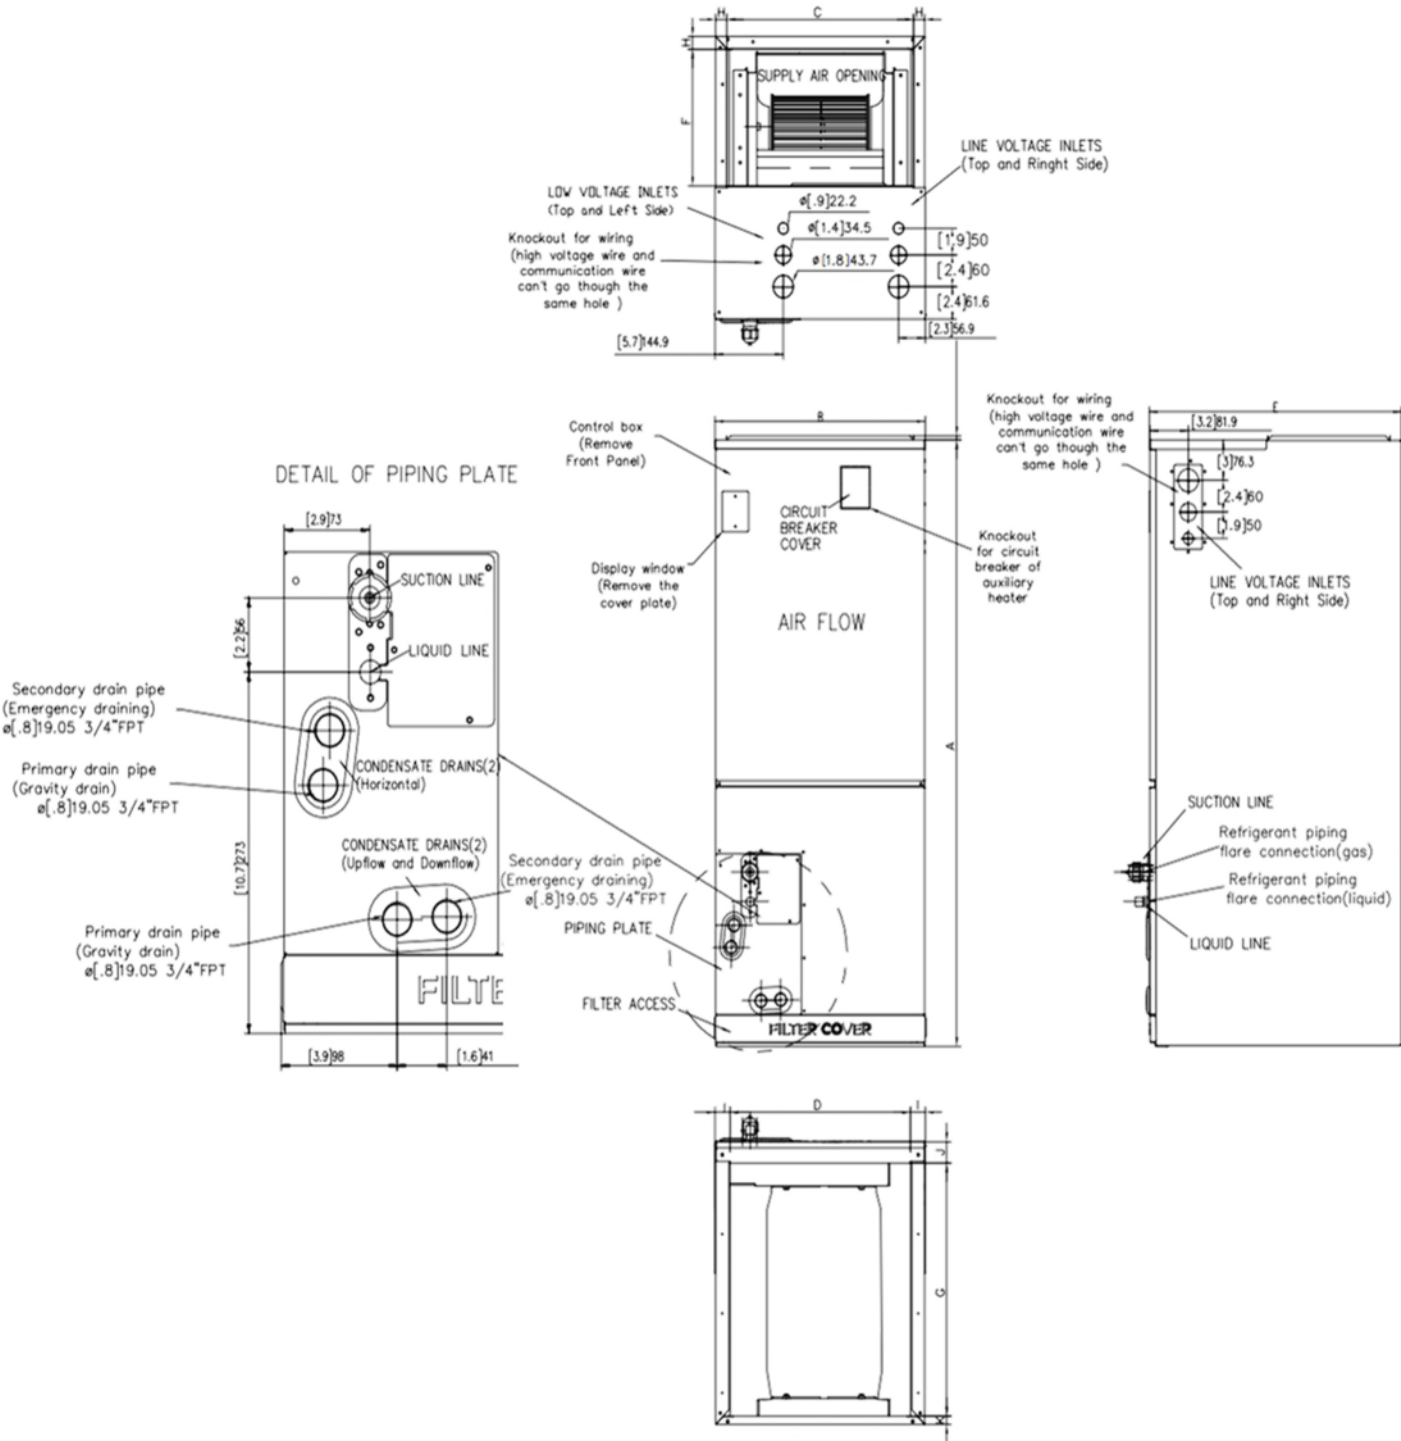

D5FLAAH60XAK			
System	Indoor Model #		D5FLAAH60XAK
	Indoor Size		60000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	11
Operating Range	Cooling Indoor DB Min - Max	°F(°C)	60~90(16~32)
	Heating Indoor DB Min - Max	°F(°C)	32~86(0~30)
Indoor Coil	No. Rows	5	
	Fins per inch	20	
	Circuits	14	
Indoor Unit	Number of Fan Speeds		820/720/615
	Airflow (highest to lowest)	CFM	1807.0 / 1553.9 / 1353.8 / 724.0 / N/A
	Sound Pressure (highest to lowest)	dB(A)	53.0/48.0/33.5
Dimensions	Height	in (mm)	52.99(1346)
	Width	in (mm)	24.49(622)
	Depth	in (mm)	21.02(534)
	Net Weight	lbs (kg)	164.02(74.4)
	Shipping Height	in (mm)	21.20(640)
	Shipping Width	in (mm)	56.30(1430)
	Shipping Depth	in (mm)	28.15(715)
	Shipping Net Weight	lbs (kg)	189.82(86.1)
CONTROLS			
Standard	Wireless Remote Controller (°F/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
	24V Mini Interface	KSAIC0601230	

INDOOR UNIT DIMENSIONS					
Dimensions		36K		48K/60K	
		Inch	mm	Inch	mm
A	Model Height	49	1245	53	1346
B	Model Width	21	534	24.5	622
C	S.A. Opening Width	19.1	486	22.6	575
D	R.A. Opening Width	18.6	473	22.1	562
E	Model Depth	21	534	21	534
F	S.A. Opening Depth	10.3	260	10.3	260
G	R.A. Opening Depth	18.8	476	18.8	476
H	S.A. Opening Clearance	0.9	24	0.9	24
I	R.A. Opening Side Clearance	1.3	32	1.1	28
J	R.A. Opening Front Clearance	1.6	41	1.6	41
K	R.A. Opening Back Clearance	0.6	16	0.8	19

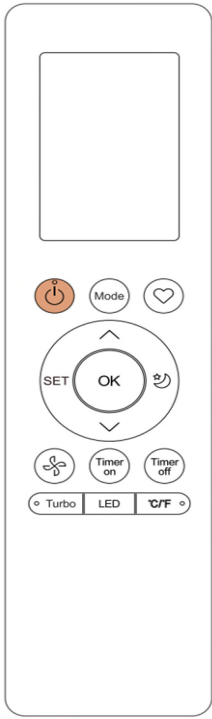

R-454B