

High Wall Heat Pump Ductless System

Indoor Model: D5FPHAH09XAK

Job Data:

Tag #:

Date:

Location:


Carrier#:



- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Four fan speeds
 - Sleep Mode
 - Turbo Mode
 - Follow Me (senses temperature at handheld remote)
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
 - Factory Pre- installed Leak Detection System
 - Pipe Connection Size - Liquid: 1/4in (6.35mm)
 - Pipe Connection Size - Suction: 3/8in (9.52mm)

- LIMITED WARRANTY***
- Seven (7) years compressor and five (5) years parts warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

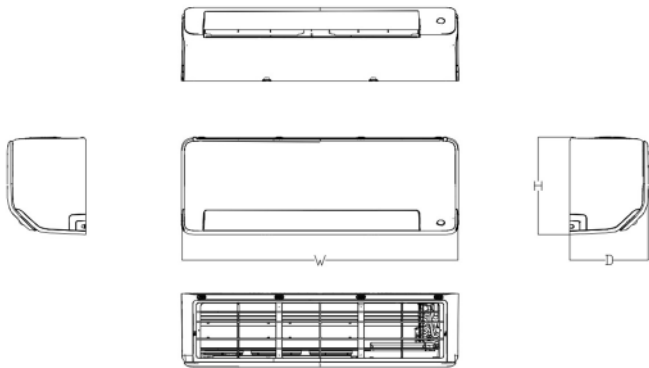

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
6K/9K/12K	mm	965	239	319
	inch	37.99	9.41	12.56

D5FPHAH09XAK			
System	Indoor Model #		D5FPHAH09XAK
	Indoor Size		9000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230V/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Operating Range	Cooling Indoor DB Min - Max	*F(*C)	60~90(16~32)
	Heating Indoor DB Min - Max	*F(*C)	32~86(0~30)
Indoor Coil	Face Area	Sq. Ft.	2.75
	No. Rows		2
	Fins per inch		20
	Circuits		4
Indoor Unit	Number of Fan Speeds		1350/1050/700
	Airflow (highest to lowest)	CFM	559.2 / 423.8 / 211.9 / 153.0 / N/A
	Sound Pressure (highest to lowest)	dB(A)	N/A/41.5/33/23/19
	Moisture Removal	L/h	0.5
	Air Throw Data	ft(m)	26.57(8.1)
Dimensions	Height	in (mm)	12.56(319)
	Width	in (mm)	37.99(965)
	Depth	in (mm)	9.41(239)
	Net Weight	lbs (kg)	28.22(12.8)
	Shipping Height	in (mm)	12.80(325)
	Shipping Width	in (mm)	41.14(1045)
	Shipping Depth	in (mm)	15.75(400)
	Shipping Net Weight	lbs (kg)	36.82(16.7)
CONTROLS			
Standard	Wireless Remote Controller (*F/*C Convertible)		
	Wi-Fi™ Kit High Wall	KSAIF0701AAA	
Optional	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
	Wired Remote Control with Timer Function	KSACN1201AAA	
	24V Mini Interface	KSAIC0601230	



R-454B