

4-Way Cassette Heat Pump Ductless System

Indoor Model: D5FSCAH24XAK


Job Data:

Tag #:

Date:

Location:

Carrier#:

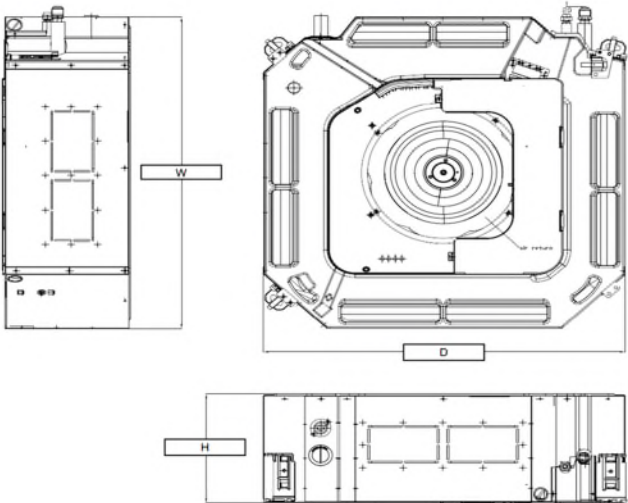

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
24K	mm	830	830	205
	inch	32.68	32.68	8.07



- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Outside Air Intake
 - Four fan speeds
 - Sleep Mode
 - Built-in condensate lift pump
 - Follow Me (senses temperature at handheld remote)
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
 - Note: Ceiling Grille is Required and Sold Separately
 - Factory Pre- installed Leak Detection System
 - Pipe Connection Size - Liquid: 3/8in (9.52mm)
 - Pipe Connection Size - Suction: 5/8in (15.9mm)

- LIMITED WARRANTY***
- Seven (7) years compressor and five (5) years parts warranty

NOTE: Images for illustration purposes only. Actual models may be slightly different.

D5FSCAH24XAK			
System	Indoor Model #		D5FSCAH24XAK
	Indoor Size		24000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Operating Range	Cooling Indoor DB Min - Max	*F(*C)	60~90 (16~32)
	Heating Indoor DB Min - Max	*F(*C)	32~86 (0~30)
Indoor Coil	Face Area	Sq. Ft.	3.86
	No. Rows		2
	Fins per inch		20
	Circuits		4
Indoor Unit	Number of Fan Speeds		624/568/426
	Airflow (highest to lowest)	CFM	706.30/635.67/547.38
	Sound Pressure (highest to lowest)	dB(A)	45.0/42.5/33.5/29.5
	Moisture Removal	L/h	2.36
	Air Throw Data	ft(m)	13.12(4)
Dimensions	Body Height	in (mm)	8.07(205)
	Body Width	in (mm)	32.68(830)
	Body Depth	in (mm)	32.68(830)
	Body Net Weight	lbs (kg)	47.18(21.4)
	Panel Height	in (mm)	1.969(50)
	Panel Width	in (mm)	37.40(950)
	Panel Depth	in (mm)	37.40(950)
	Shipping Height	in (mm)	9.84(250)
	Shipping Width	in (mm)	35.83(910)
	Shipping Depth	in (mm)	35.83(910)
Controls	Wireless Remote Controller (*F/*C Convertible)		
	Standard	Cassette Panel	
Optional	Required	KSALG0203AAA	
	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
	Wired Remote Control with Timer Function	KSACN1201AAA	
	Wi-Fi™ Kit High Wall	KSAIF0701AAA	
	24V Mini Interface	KSAIC0601230	



R-454B



R-454B