

Low Static Ducted Slim Heat Pump Ductless System

Indoor Model: D5FSDAH12XAK

Job Data:

Tag #:

Date:

Location:

Carrier#:





- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Vertical or Horizontal Installation
 - Rear or Bottom Return
 - Outside Air Intake
 - Condensate Lift pump shipped with the unit
 - Follow Me (senses temperature at handheld remote)
 - Refrigerant Leak Detection Sensor
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating

LIMITED WARRANTY*

• Seven (7) years compressor and five (5) years parts warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

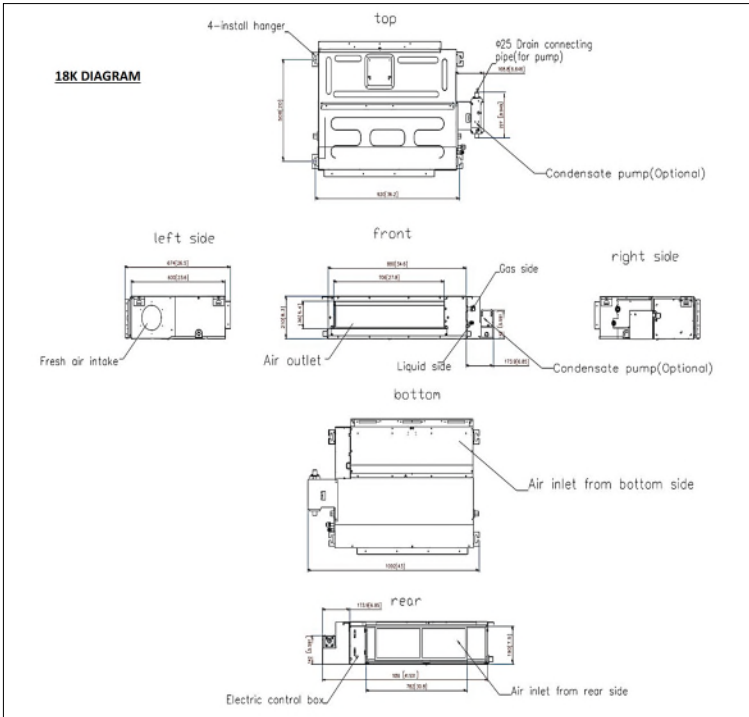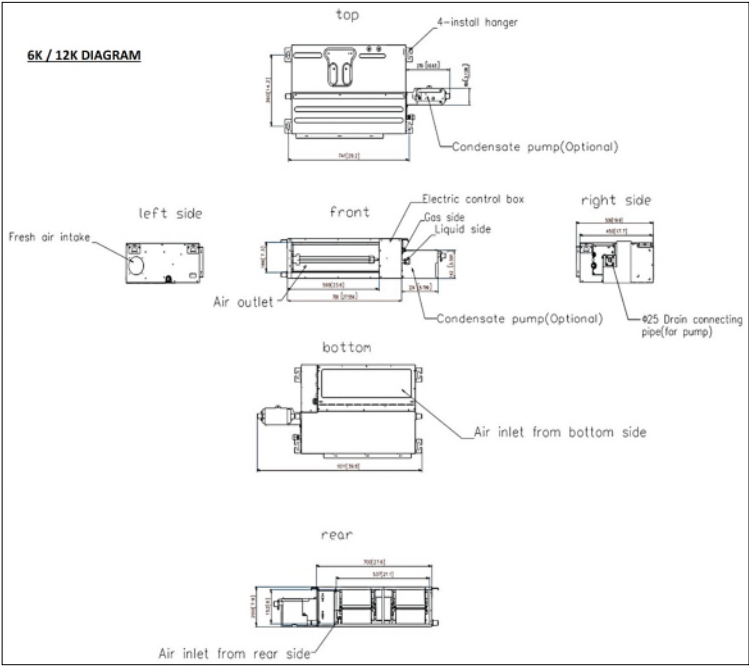

D5FSDAH12XAK			
System	Indoor Model #		D5FSDAH12XAK
	Indoor Size		12000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
Piping	MCA	A.	3
	Pipe Connection Size - Liquid	in (mm)	1/4(6.35)
Operating Range	Pipe Connection Size - Suction	in (mm)	3/8(9.52)
	Cooling Indoor DB Min - Max	*F(*C)	60~90 (16~32)
Indoor Coil	Heating Indoor DB Min - Max	*F(*C)	32~86 (0~30)
	Face Area	Sq. Ft.	1.19
Indoor Unit	No. Rows		3
	Fins per inch		18
Dimensions	Circuits		3
	Number of Fan Speeds		1070/990/910
Controls	Airflow (highest to lowest)	CFM	400.25 / 323.73 / 264.87 / 176.58 / 117.72
	Sound Pressure (highest to lowest)	dB(A)	N/A/36/34.5/32.5/25.5
Standard	Height	in (mm)	7.87(200)
	Width	in (mm)	27.56(700)
Optional	Depth	in (mm)	19.92(506)
	Net Weight	lbs (kg)	39.46(17.9)
Wireless Remote Controller (*F/*C Convertible)	Shipping Height	in (mm)	10.83(275)
	Shipping Width	in (mm)	42.13(1070)
Wired Remote Control 7 Day Programmable	Shipping Depth	in (mm)	21.26(540)
	Shipping Net Weight	lbs (kg)	46.74(21.2)
Wired Remote Control with Timer Function			
24V Mini Interface			
24V GEN 3 Interface			

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
6K/12K	mm	700	506	200
	inch	27.56	19.92	7.87
18K	mm	880	674	210
	inch	34.65	26.54	8.27



R-454B