

# High Wall Heat Pump Ductless System

Indoor Model: **D5FSHAH06XAK**

Job Data:   
 Tag #:   
 Date:

Location:   
 Carrier#:




### INDOOR STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Four fan speeds
- Sleep Mode
- Turbo Mode
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating
- Factory Pre-Installed Leak Detection System
- Pipe Connection Size - Liquid : **1/4in(6.35mm)**
- Pipe Connection Size - Suction : **3/8in(9.52mm)**

### LIMITED WARRANTY\*

- Seven (7) years compressor and five (5) years parts warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

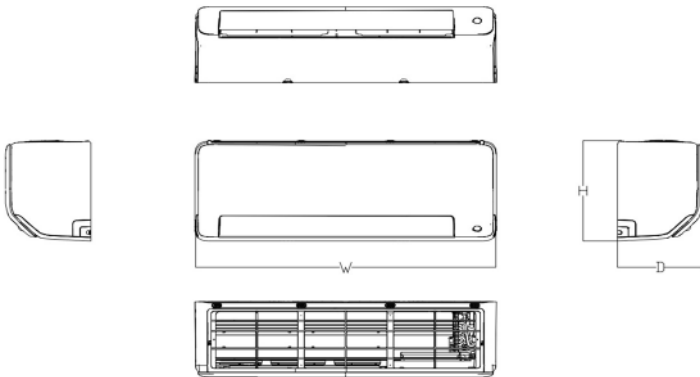

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
6K/9K/12K	mm	795	225	295
	inch	31.3	8.86	11.61
18K	mm	965	239	319
	inch	37.99	9.41	12.56
24K ~ 36K	mm	1140	275	370
	inch	44.88	10.83	14.57

D5FSHAH06XAK		
<b>System</b>	Indoor Model #	D5FSHAH06XAK
	Indoor Size	6000
<b>Electrical</b>	Voltage, Phase, Cycle	V/Ph/Hz 208/230-1-60
	Power Supply	Indoor unit powered by outdoor unit
	MCA	A. 3
<b>Operating Range</b>	Cooling Indoor DB Min - Max	*F(*C) 60~90(16~32)
	Heating Indoor DB Min - Max	*F(*C) 32~86(0~30)
<b>Indoor Coil</b>	Face Area	Sq. Ft. 2.15
	No. Rows	2
	Fins per inch	20
	Circuits	3
<b>Indoor Unit</b>	Number of Fan Speeds	1100/850/700
	Airflow (highest to lowest)	CFM 382.6 / 323.7 / 229.6 / 176.6 / 147.2
	Sound Pressure (highest to lowest)	dB(A) 44.0/36.5/32.5/22.0/19.5
	Moisture Removal	L/h 0.3
	Air Throw Data	ft(m) 23.62(7.2)
<b>Dimensions</b>	Height	in (mm) 11.61(295)
	Width	in (mm) 31.30(795)
	Depth	in (mm) 8.86(225)
	Net Weight	lbs (kg) 22.93(10.4)
	Shipping Height	in (mm) 12.01(305)
	Shipping Width	in (mm) 34.25(870)
	Shipping Depth	in (mm) 14.57(370)
	Shipping Net Weight	lbs (kg) 29.32(13.3)
	<b>CONTROLS</b>	
<b>Standard</b>	Wireless Remote Controller (*F/*C Convertible)	
<b>Optional</b>	Wired Remote Control 7 Day Programmable	KSACN1401AAA
	Wired Remote Control with Timer Function	KSACN1201AAA
	Wi-Fi™ Kit High Wall	KSAIF0701AAA
	24V Mini Interface	KSAIC0601230



**R-454B**