

High Wall Heat Pump Ductless System

Indoor Model: D5FSHAH09XAK

Job Data: _____

Tag #: _____

Date: _____

Location: _____


Carrier#: _____



- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Four fan speeds
 - Sleep Mode
 - Turbo Mode
 - Follow Me (senses temperature at handheld remote)
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
 - Factory Pre-Installed Leak Detection System
 - Pipe Connection Size - Liquid : **1/4in(6.35mm)**
 - Pipe Connection Size - Suction : **3/8in(9.52mm)**

- LIMITED WARRANTY***
- Seven (7) years compressor and five (5) years parts warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

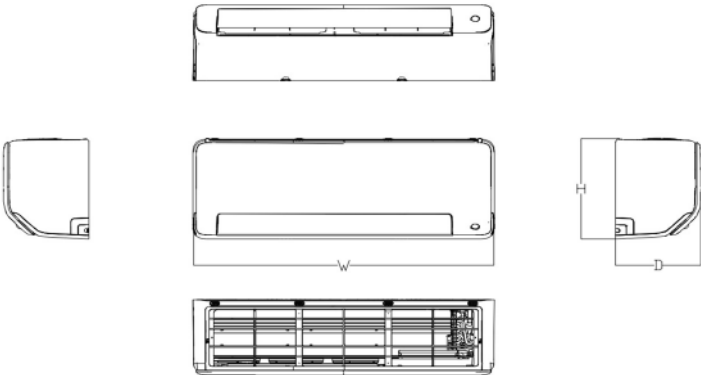

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
6K/9K/12K	mm	795	225	295
	inch	31.3	8.86	11.61
18K	mm	965	239	319
	inch	37.99	9.41	12.56
24K ~ 36K	mm	1140	275	370
	inch	44.88	10.83	14.57

D5FSHAH09XAK			
System	Indoor Model #		D5FSHAH09XAK
	Indoor Size		9000
Electrical	Voltage, Phase, Cycle		V/Ph/Hz 208/230-1-60
	Power Supply		Indoor unit powered by outdoor unit
	MCA		A. 3
Operating Range	Cooling Indoor DB Min - Max		*F(°C) 60~90(16~32)
	Heating Indoor DB Min - Max		*F(°C) 32~86(0~30)
Indoor Coil	Face Area		Sq. Ft. 2.15
	No. Rows		2
	Fins per inch		20
	Circuits		3
Indoor Unit	Number of Fan Speeds		1100/850/700
	Airflow (highest to lowest)		CFM 441.4 / 323.7 / 229.6 / 176.6 / 147.2
	Sound Pressure (highest to lowest)		dB(A) N/A/38/33/20.5/19.5
	Moisture Removal		L/h 0.3
	Air Throw Data		ft(m) 23.62(7.2)
Dimensions	Height		in (mm) 11.61(295)
	Width		in (mm) 31.30(795)
	Depth		in (mm) 8.86(225)
	Net Weight		lbs (kg) 23.37(10.6)
	Shipping Height		in (mm) 12.01(305)
	Shipping Width		in (mm) 34.25(870)
	Shipping Depth		in (mm) 14.57(370)
	Shipping Net Weight		lbs (kg) 29.98(13.6)
CONTROLS			
Standard	Wireless Remote Controller (*F/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable		KSACN1401AAA
	Wired Remote Control with Timer Function		KSACN1201AAA
	Wi-Fi™ Kit High Wall		KSAIF0701AAA
	24V Mini Interface		KSAIC0601230



R-454B