

High Wall Heat Pump Ductless System

Indoor Model: D5FSHAH18XAK

Job Data:

Location:

Tag #:


Carrier#:

Date:



- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Four fan speeds
 - Sleep Mode
 - Turbo Mode
 - Follow Me (senses temperature at handheld remote)
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
 - Factory Pre-Installed Leak Detection System
 - Pipe Connection Size - Liquid : **1/4in(6.35mm)**
 - Pipe Connection Size - Suction : **1/2in(12.7mm)**
- RESIDENTIAL APPLICATION LIMITED WARRANTY***
- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

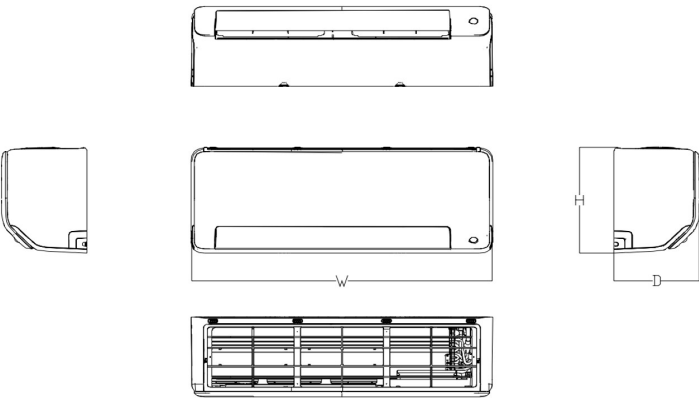

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
6K/9K/12K	mm	795	225	295
	inch	31.3	8.86	11.61
18K	mm	965	239	319
	inch	37.99	9.41	12.56
24K ~ 36K	mm	1140	275	370
	inch	44.88	10.83	14.57

D5FSHAH18XAK			
System	Indoor Model #		D5FSHAH18XAK
	Indoor Size		18000
Electrical	Voltage, Phase, Cycle		V/Ph/Hz 208/230-1-60
	Power Supply		Indoor unit powered by outdoor unit
	MCA		A. 3
Operating Range	Cooling Indoor DB Min - Max		"F"(°C) 60~90(16 ~ 32)
	Heating Indoor DB Min - Max		"F"(°C) 32~86(0 ~ 30)
Indoor Coil	Face Area		Sq. Ft. 2.75
	No. Rows		2
	Fins per inch		20
	Circuits		4
Indoor Unit	Number of Fan Speeds		1190/994/896
	Airflow (highest to lowest)	CFM	635.7 / 500.3 / 359.0 / 294.3 / /
	Sound Pressure (highest to lowest)	dB(A)	49.5/45.0/38.0/31.5/19.5
	Moisture Removal	L/h	2.2
	Air Throw Data	ft(m)	26.57(8.1)
Dimensions	Height	in (mm)	12.56(319)
	Width	in (mm)	37.99(965)
	Depth	in (mm)	9.41(239)
	Net Weight	lbs (kg)	27.34(12.4)
	Shipping Height	in (mm)	12.80(325)
	Shipping Width	in (mm)	41.14(1045)
	Shipping Depth	in (mm)	15.75(400)
	Shipping Net Weight	lbs (kg)	36.6(16.6)
CONTROLS			
Standard	Wireless Remote Controller ("F"/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable		KSACN1401AAA
	Wired Remote Control with Timer Function		KSACN1201AAA
	Wi-Fi™ Kit High Wall		KSAIF0701AAA
	24V Mini Interface		KSAIC0601230



R-454B