

High Wall Heat Pump Ductless System

Indoor Model: **D5FSAH33XAK**

Job Data:
 Tag #:
 Date:

Location:
 Carrier#:




INDOOR STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Four fan speeds
- Sleep Mode
- Turbo Mode
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating
- Factory Pre-Installed Leak Detection System
- Pipe Connection Size - Liquid : **3/8in(9.52mm)**
- Pipe Connection Size - Suction : **3/4in(19mm)**

RESIDENTIAL APPLICATION LIMITED WARRANTY*


- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

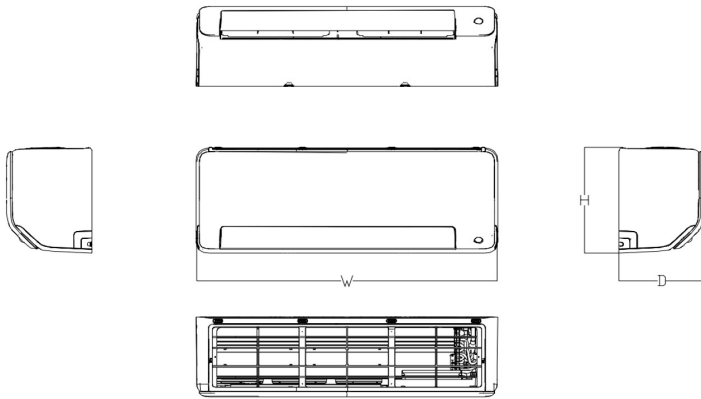

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
6K/9K/12K	mm	795	225	295
	inch	31.3	8.86	11.61
18K	mm	965	239	319
	inch	37.99	9.41	12.56
24K ~ 36K	mm	1140	275	370
	inch	44.88	10.83	14.57

D5FSAH33XAK			
System	Indoor Model #	D5FSAH33XAK	
	Indoor Size	33000	
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Operating Range	Cooling Indoor DB Min - Max	*F(*C)	60~90(16 ~ 32)
	Heating Indoor DB Min - Max	*F(*C)	32~86(0 ~ 30)
Indoor Coil	Face Area	Sq. Ft.	3.6
	No. Rows		3
	Fins per inch		20
	Circuits		7
Indoor Unit	Number of Fan Speeds		1050/880/630
	Airflow (highest to lowest)	CFM	882.9 / 635.7 / 506.2 / 382.6 / /
	Sound Pressure (highest to lowest)	dB(A)	53.0/45.5/40/30.5/19.5
	Moisture Removal	L/h	4
	Air Throw Data	ft(m)	30.1(9.18)
Dimensions	Height	in (mm)	14.57(370)
	Width	in (mm)	44.88(1140)
	Depth	in (mm)	10.83(275)
	Net Weight	lbs (kg)	43.21(19.6)
	Shipping Height	in (mm)	13.98(355)
	Shipping Width	in (mm)	48.43(1230)
	Shipping Depth	in (mm)	17.91(455)
	Shipping Net Weight	lbs (kg)	55.78(25.3)
CONTROLS			
Standard	Wireless Remote Controller (*F/*C Convertible)		
Optional	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
	Wired Remote Control with Timer Function	KSACN1201AAA	
	Wi-Fi™ Kit High Wall	KSAIF0701AAA	
	24V Mini Interface	KSAIC0601230	



R-454B