

Multipoise Crossover Air Handler

Indoor Model: D5FUHAH24XAK

Job Data:

Tag #:

Date:

Location:

Carrier#:



INDOOR STANDARD FEATURES


- Modes: Cool, Heat, Dry, Fan, Auto
- Factory installed leak detection system
- Conventional Lineset
- Modular Design
- Dual Voltage (115V/230V)
- Constant Air Motor/Blower
- Quiet indoor operation
- Anti-corrosive fin coating

LIMITED WARRANTY*

- Seven (7) years compressor and five (5) years parts warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

D5FUHAH24XAK			
System	Indoor Model #		D5FUHAH24XAK
	Indoor Size		
Electrical	Voltage, Phase, Cycle		24000
	V/Ph/Hz		208-230/1/60
	Power Supply	Indoor unit powered separate from outdoor unit	
	MCA	A.	3.5
Operating Range	Cooling Indoor DB Min - Max	*F(°C)	60~90(16~32)
	Heating Indoor DB Min - Max	*F(°C)	32~86(0~30)
Indoor Coil	Face Area	Sq. Ft.	6.75
	No. Rows		2
	Fins per inch		20
	Circuits		8
Indoor Unit	Number of Fan Speeds		903/872/842/816
	Airflow (highest to lowest)	CFM	824.0 / 759.3 / 694.5 / 629.8 / N/A
	Sound Pressure	dB(A)	N/A/47.5/44/33/N/A
Dimensions	Height	in (mm)	53.86(1368)
	Width	in (mm)	21.5(546)
	Depth	in (mm)	14.49(368)
	Net Weight	lbs (kg)	123.02(55.8)
	Shipping Height	in (mm)	31.1(790)
	Shipping Width	in (mm)	52.95(1345)
	Shipping Depth	in (mm)	17.52(445)
Shipping Net Weight	lbs (kg)	154.76(70.2)	
CONTROLS			
Standard	Wireless Remote Controller (*F/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable		KSACN1401AAA

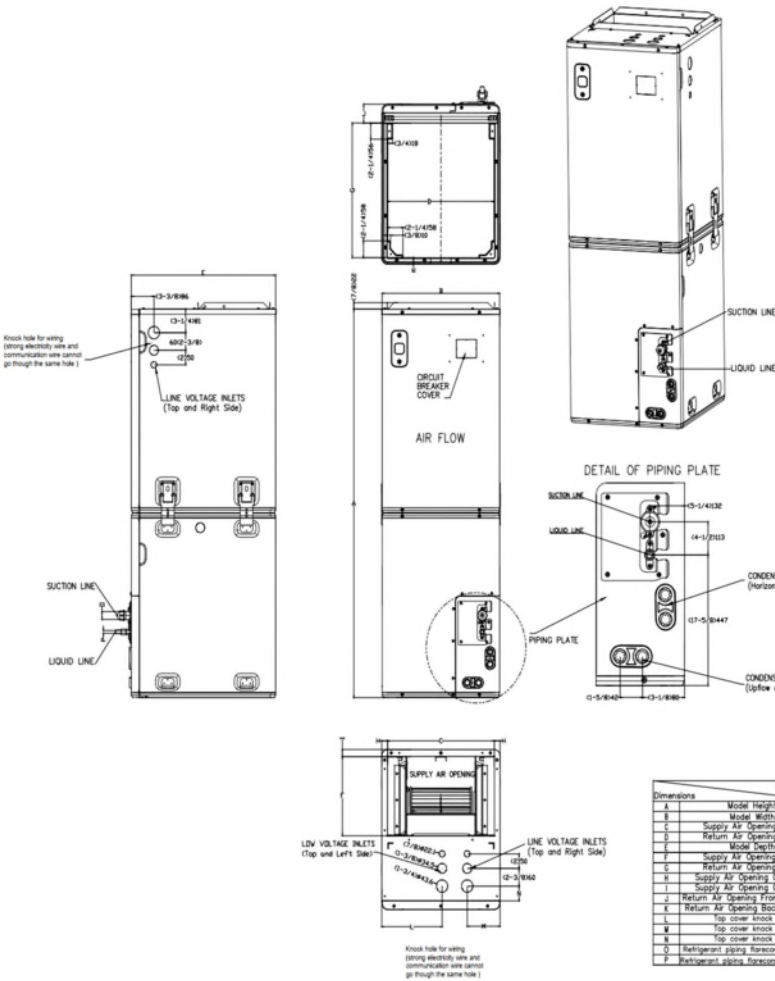

Model(Btu/h)		18K/24K		36K/48K		60K/72K	
Dimensions		18K	24K	36K	48K	60K	72K
A	Model Height	48-1/8	52-1/8	54-1/8	54-1/8	54-1/8	54-1/8
B	Model Width	14-1/2	14-1/2	14-1/2	14-1/2	14-1/2	14-1/2
C	Supply Air Opening Width	12-1/8	12-1/8	12-1/8	12-1/8	12-1/8	12-1/8
D	Return Air Opening Width	12-1/8	12-1/8	12-1/8	12-1/8	12-1/8	12-1/8
E	Model Depth	21-1/2	21-1/2	21-1/2	21-1/2	21-1/2	21-1/2
F	Supply Air Opening Depth	12-1/8	12-1/8	12-1/8	12-1/8	12-1/8	12-1/8
G	Return Air Opening Depth	12-1/8	12-1/8	12-1/8	12-1/8	12-1/8	12-1/8
H	Supply Air Opening Clearance	7/8	7/8	7/8	7/8	7/8	7/8
I	Return Air Opening Clearance	7/8	7/8	7/8	7/8	7/8	7/8
J	Return Air Opening Front Clearance	2-1/2	2-1/2	2-1/2	2-1/2	2-1/2	2-1/2
K	Return Air Opening Back Clearance	7/8	7/8	7/8	7/8	7/8	7/8
L	Top cover knock hole	7	7	7	7	7	7
M	Top cover knock hole	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2
N	Top cover knock hole	3	3	3	3	3	3
O	Refrigerant piping, R410A connection(gas)	3/4	3/4	3/4	3/4	3/4	3/4
P	Refrigerant piping, R410A connection(liquid)	3/8	3/8	3/8	3/8	3/8	3/8