

Multipoise Crossover Air Handler

Indoor Model: D5FUHAH36XAK

Job Data:

Tag #:

Date:

Location:

Carrier#:



INDOOR STANDARD FEATURES


- Modes: Cool, Heat, Dry, Fan, Auto
- Factory installed leak detection system
- Conventional Lineset
- Modular Design
- Dual Voltage (115V/230V)
- Constant Air Motor/Blower
- Quiet indoor operation
- Anti-corrosive fin coating

LIMITED WARRANTY*

- Seven (7) years compressor and five (5) years parts warranty.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

D5FUHAH36XAK			
System	Indoor Model #		D5FUHAH36XAK
	Indoor Size		36000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered separate from outdoor unit	
	MCA	A.	6
Operating Range	Cooling Indoor DB Min - Max	°F(°C)	60~90(16~32)
	Heating Indoor DB Min - Max	°F(°C)	32~86(0~30)
Indoor Coil	Face Area	Sq. Ft.	7.61
	No. Rows		3
	Fins per inch		16
	Circuits		4
Indoor Unit	Number of Fan Speeds		970/929/889/852
	Airflow (highest to lowest)	CFM	1236.1 / 1147.8 / 1059.5 / 971.2 / N/A
	Sound Pressure	dB(A)	48/46.5/45.0/33/N/A
	Height	in (mm)	58.11(1476)
Dimensions	Width	in (mm)	21.5(546)
	Depth	in (mm)	17.52(445)
	Net Weight	lbs (kg)	149.25(67.7)
	Shipping Height	in (mm)	31.1(790)
	Shipping Width	in (mm)	57.09(1450)
	Shipping Depth	in (mm)	20.47(520)
	Shipping Net Weight	lbs (kg)	182.1(82.6)
CONTROLS			
Standard	Wireless Remote Controller ("F"/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable		KSACN1401AAA

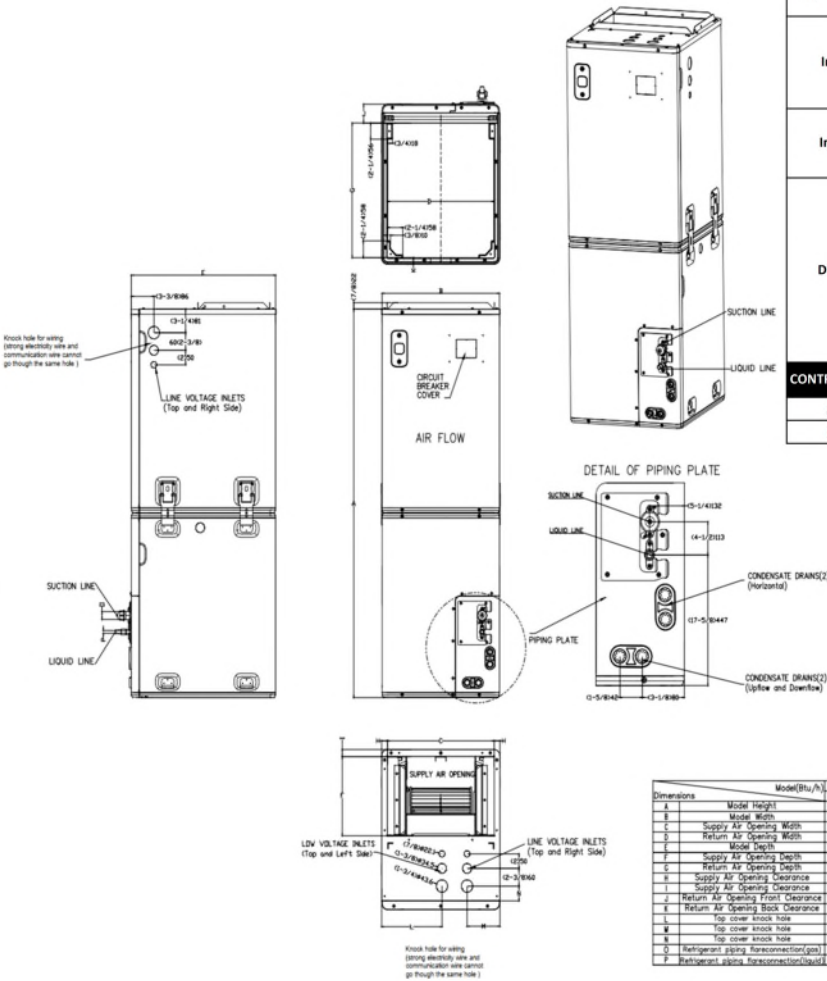

Model(Btu/h)		18K/24K		36K/48K		60K/72K	
Dimensions		18K	24K	36K	48K	60K	72K
1 Model Height	in	48-1/8	48-1/8	52-1/8	52-1/8	54-1/8	54-1/8
2 Model Width	in	14-1/2	14-1/2	17-1/2	17-1/2	21-1/2	21-1/2
3 Supply Air Opening Width	in	12-1/8	12-1/8	15-1/8	15-1/8	19-1/8	19-1/8
4 Return Air Opening Width	in	12-1/8	12-1/8	15-1/8	15-1/8	19-1/8	19-1/8
5 Model Depth	in	21-1/2	21-1/2	21-1/2	21-1/2	21-1/2	21-1/2
6 Supply Air Opening Depth	in	10-5/8	10-5/8	10-5/8	10-5/8	10-5/8	10-5/8
7 Return Air Opening Depth	in	10-5/8	10-5/8	10-5/8	10-5/8	10-5/8	10-5/8
8 Supply Air Opening Clearance	in	22	22	22	22	22	22
9 Return Air Opening Clearance	in	22	22	22	22	22	22
10 Top cover knock hole	in	24	24	24	24	24	24
11 Bottom cover knock hole	in	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2
12 Refrigerant piping connection(gas)	in	3/4	3/4	3/4	3/4	3/4	3/4
13 Refrigerant piping connection(liquid)	in	3/8	3/8	3/8	3/8	3/8	3/8