



# Heat Pump List



## MIDEA DLC-series

Central Air Conditioning Heat Pump (HP)

Singlezone Non-Ducted, Wall Placement

AHRI Cert #+: **208447669**

Outdoor Unit Model #+: **DLCSRBH06AAK**


Indoor Model #+: **DLFCH06XAK**

🔥 Maximum Heating Capacity (Btu/h) @5°F: **7,500**

🔥 Rated Heating Capacity (Btu/h) @47°F+: **7,000**

❄️ Rated Cooling Capacity (Btu/h) @95°F+: **6,000**

Heating/Cooling Capacity Graph

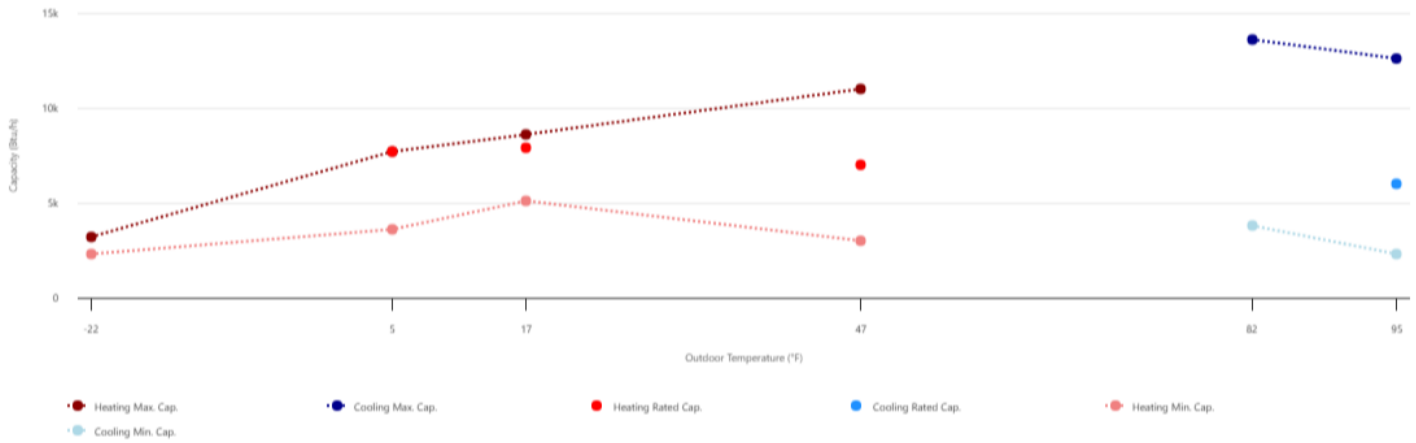

## Information Tables

<b>Brand</b>	MIDEA
<b>Series</b>	DLC-series
<b>Ducting Configuration</b>	Singlezone Non-Ducted, Wall Placement
<b>AHRI Certificate #*</b>	208447669
<b>Outdoor Unit Model #*</b>	DLCSRBH06AAK
<b>Indoor Model #*</b>	DLFSHCH06XAK
<b>Indoor Unit Type*</b>	Mini-Splits
<b>Furnace Model #</b>	
<b>EER*</b>	
<b>SEER*</b>	
<b>HSPF (Region IV)*</b>	
<b>EER2*</b>	15.8
<b>SEER2*</b>	26.5
<b>HSPF2 (Region IV)*</b>	13.6
<b>HSPF2 (Region V)</b>	10
<b>ENERGY STAR V6.1</b>	✓
<b>ENERGY STAR V6.1 Cold Climate</b>	✓
<b>ENERGY STAR V5.0</b>	✗
<b>Federal Tax Credit Eligibility North</b>	
<b>Federal Tax Credit Eligibility South</b>	
<b>CEE Tier 1 Path A (2025)</b>	✓
<b>CEE Tier 1 Path B (2025)</b>	✓
<b>Capacity Maintenance (Rated 17°F/Rated 47°F)</b>	121%
<b>Capacity Maintenance (Rated 5°F/Rated 47°F)</b>	107%
<b>Capacity Maintenance (Max 5°F/Rated 47°F)</b>	107%
<b>Variable Capacity</b>	✓
<b>Integration</b>	
<b>Connectivity</b>	
<b>Operational Diagnostics</b>	
<b>Refrigerant</b>	R-410A
<b>Created At</b>	2026-03-31
<b>Updated At</b>	2026-04-03
<b>Sold In*</b>	Canada

## Performance Specs

Heating / Cooling	Outdoor Dry Bulb	Indoor Dry Bulb	Unit	Min	Rated*	Max
				3,388	6,000	12,402
			kW	0.38	0.38	0.97
			COP	2.61	4.63	3.75
Cooling	95°F	80°F	Btu/h*	3,268	-	11,242
			kW	0.11	-	0.6
			COP	8.71	-	5.49
Heating	82°F	80°F	Btu/h*	3,565	7,000	13,241
			kW	0.24	0.52	1.04
			COP	4.35	3.95	3.73
Heating	47°F	70°F	Btu/h*	2,108	8,500	10,041
			kW	0.27	0.86	1.2
			COP	2.29	2.9	2.45
Heating	17°F	70°F	Btu/h*	2,105	7,500	7,500
			kW	0.34	1.05	1.05
			COP	1.81	2.09	2.09