




*Wall Thermostat should be connected
on the unit to be Smart*



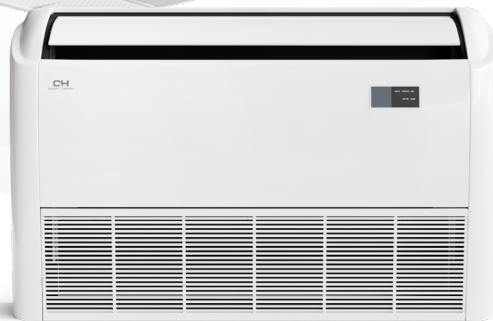

18K, 24K, 36K,
48K, 60K Btu/h



- Smart Kit Built In with Downloadable C&H app
- Remote Control Included
- Wall Thermostat (Purchased Separately)




*Wall Thermostat should be connected
on the unit to be Smart*

INDOOR	HYPER			LIGHT COMMERCIAL					REGULAR		LIGHT COMMERCIAL				
	Indoor Model			CH-RSH18MFC	CH-RSH24MFC	CH-RSH36LCFC	CH-RSH48LCFC	CH-RSH60LCFC	CH-RSH18MFC	CH-RSH24MFC	CH-RSH36LCFC	CH-RSH48LCFC	CH-RSH60LCFC		
	Power Supply	Rated	V, Ph, Hz	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60		
		Rated Capacity	Cooling	Btu/h	17,000	22,000	36,400	48,000	54,000	18,000	24,000	36,000	48,000	54,000	
	Heating		Btu/h	19,000	26,000	38,000	52,000	60,000	18,000	24,400	38,000	50,000	60,000		
	Minimum Circuit Ampacity (MCA)			A	1.9	2.5	3	3	3	1.9	2.5	3	3	3	
	Max. Fuse			A	15	15	15	15	15	15	15	15	15	15	
	Indoor Air Flow (Turbo/Hi/Mi/Lo/Si)			CFM	576.8/547.4/485.6/420.8/ N/A	735.8/706.3/606.3/453.2/376.7	1224.3/1088.9/988.8/w765.2/653.3	1353.8/1236.1/1083.0/800.5/665.1	1365.6/1236.1/1118.3/882.9/777.0	576.8/547.4/485.6/420.8/ N/A	735.8/706.3/606.3/453.2/376.7	1224.3/1088.9/988.8/765.2/653.3	1353.8/1236.1/1083.0/800.5/665.1	1365.6/1236.1/1118.3/882.9/777.0	
	Indoor Noise Level (Turbo/Hi/Mi/Lo/Si)			dB(A)	45/42.5/39.5/30.5/29	51.5/49/45/34/29	N/A/51/45.5/39/35	54/53.0/48.5/39/35	N/A/54.5/49/42/39	N/A/43.0/40.0/32.0/29.0	51.5/49/45/34/29	50.5/49/44.5/37/33	N/A/53/49/39/34.5	N/A/54.5/49.5/41.5/38.5	
	Indoor	Dimension (WxDxH)	inch	42.05x26.57x9.25	42.05x26.57x9.25	64.96x26.57x9.25	64.96x26.57x9.25	64.96x26.57x9.25	42.05x26.57x9.25	42.05x26.57x9.25	64.96x26.57x9.25	64.96x26.57x9.25	64.96x26.57x9.25	64.96x26.57x9.25	
Packing (WxDxH)		inch	45.08x29.72x12.52	45.08x29.72x12.52	67.91x29.72x12.52	67.91x29.72x12.52	67.91x29.72x12.52	45.08x29.72x12.52	45.08x29.72x12.52	67.91x29.72x12.52	67.91x29.72x12.52	67.91x29.72x12.52	67.91x29.72x12.52		
Net/Gross Weight		lbs.	58.42/70.55	61.29/73.19	88.85/104.94	89.07/105.16	95.24/111.33	58.42/70.55	61.29/73.19	88.85/104.94	89.07/105.16	95.24/111.33	95.24/111.33		
Room Temperature	Cooling	°F	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90		
	Heating	°F	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86		
Liquid Side/Gas Side			inch	1/4"/1/2"	3/8"/5/8"	3/8"/3/4"	3/8"/3/4"	3/8"/3/4"	1/4"/1/2"	3/8"/5/8"	3/8"/3/4"	3/8"/3/4"	3/8"/3/4"		

[illegible]

Universal Floor Ceiling

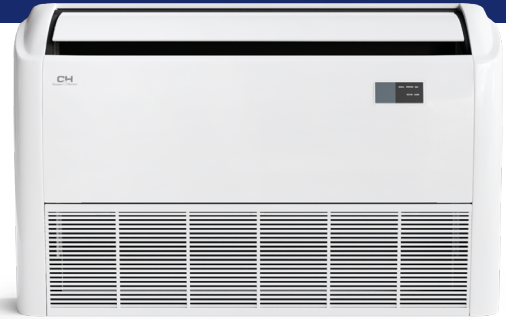

CONVENIENT INSTALLATION AND MAINTENANCE

The Floor Ceiling unit installation can be applied horizontally from the ceiling or vertically on a wall.

DOWNLOAD THE
COOPER&HUNTER
REMOTE APP

IOS



ANDROID



Line Set Model 3/4"	Line Set Model 1/2"	Line Set Size
PJX-N1-C16FTW-MAX	PJX-N1-C16FTW-MAX-i05	1/4" – 3/8"
PJX-N1-C25FTW-MAX	PJX-N1-C25FTW-MAX-i05	1/4" – 3/8"
PJX-N1-C50FTW-MAX	PJX-N1-C50FTW-MAX-i05	1/4" – 3/8"
PJX-N2-C16FTW-MAX	PJX-N2-C16FTW-MAX-i05	1/4" – 1/2"
PJX-N2-C25FTW-MAX	PJX-N2-C25FTW-MAX-i05	1/4" – 1/2"
PJX-N2-C50FTW-MAX	PJX-N2-C50FTW-MAX-i05	1/4" – 1/2"
PJX-N3-C16FTW-MAX	PJX-N3-C16FTW-MAX-i05	3/8" – 5/8"
PJX-N3-C25FTW-MAX	PJX-N3-C25FTW-MAX-i05	3/8" – 5/8"
PJX-N3-C50FTW-MAX	PJX-N3-C50FTW-MAX-i05	3/8" – 5/8"
PJX-N4-C25FTW-MAX		3/8" – 3/4"
PJX-N4-C50FTW-MAX		3/8" – 3/4"
PJX-N6-C25FTW-MAX		3/8" – 7/8"
PJX-N6-C50FTW-MAX		3/8" – 7/8"

New Display Design



TECHNICAL SUPPORT
cooperandhunter.us | 786-953-6706

Universal Floor Ceiling

Your actual Inverter Heat Pump system and related devices may differ from images shown in this specification sheet. Test conditions are based on AHRI 210/240. Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or change specifications or designs at any time without incurring obligations.

© 01.2025 All rights reserved.

SCAN HERE FOR FLOOR CEILING MODELS

