TECHNICAL DATA SHEET DIVERSITECH



The Hurricane Pad™

Description

Designed specifically for the hurricane affected regions of Florida and the Gulf Coast, The Hurricane Pad™ simplifies meeting code requirements for mounting HVAC outdoor equipment. Three versions are available: 150 mph ("H"), 175 mph ("HT"), and 175 mph Miami-Dade ("HMD"). All are 4" in height, compliant to International Mechanical Code (IBC) section 304.10 requirements.

Application

- HVAC outdoor units in hurricane affected wind zones
- Installation:
- Pad should be placed on compacted level soil, gravel, or harder surfaces, including but not limited to concrete or asphalt.
- Tie Down Clips may be used for unit attachment (TDC-4, TDC-6, TDC-8 etc.)
- For extreme cases, the Pad Anchor Kit (EP-TDK) may be used to anchoring to ground.
- See Wind Tables for complete instructions.

Features

- Designed to meet Florida Building Code requirements
- Durable, and optimized for HVAC outdoor units
- EPS foam core ("H" and "HT" models only)
 - Vibration-dampening
- Full foam bottom resists settling
- Unaffected by water, soil, fungus or bacteria
- EPS foam core removed for "HMD" models to prevent floatation

140

150

- Continuous steel reinforcement
- Concrete gray color
- Unaffected by UV exposure or extreme weather
- Drillable for securing unit (1/4 x 1-1/4" Tapcon® recommended)

Specifications


- 7000+ PSI reinforced concrete; ASTM Type 1 EPS foam core ("H" and "HT" models only)
- Recommended temperature range: -48°F to 180°F
- Heat/flame resistance:
- Resists incidental torch contact
- Not to be used under continuous heating devices, such as water heaters
- Tested per ASTM C67 (flawless performance under 25-cycle testing regimen)
- Tested per ASTM D2299. Does not crack, flake, or warp when subjected to...
- R-22 or R134a refrigerant
- Compressor oil
- Salt solution (20% by volume)
- Synthetic canine urine

Made in USA by DiversiTech

Warranty

Limited Lifetime Warranty



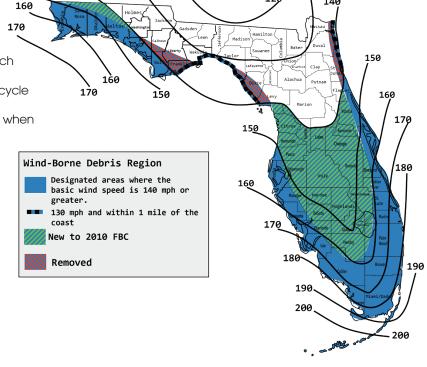

130