

Product data sheet


Premier

AR1998



ARRONE overhead electromagnetic door closing device:

- Fixed power size 4
- Function: Closing, latching, electro hold open, electro swing free
- Cover: Slimline cover
- Maximum door width: 1,100 mm (Fig 1), 950 mm (Fig 6)
- Maximum door weight: 80 kg (Fig 1), 60 kg (Fig 6)
- Arm application: Fig 1 and Fig 6 fixing positions
- Successfully type tested for conformity to all the requirements of **BS EN 1154:1997**
 - Door mount pull side: 3 | 8 | 4 | 1* | 1 | 3
 - Door mount push side: 3 | 8 | 3 | 1* | 1 | 3
- Included in a successful fire test to **BS EN 1634** Part 1. Assessed for use on 30, 60 and 120 minutes timber fire doors.
- CE Marked: AE0017, UKCA Marked: AD7697
- CE DOP: HUK0006-1 (Fig 1), HUK0006-2 (Fig 6), UKCA DOP: HUK0006-1-UK (Fig 1), HUK0006-2-UK (Fig 6)

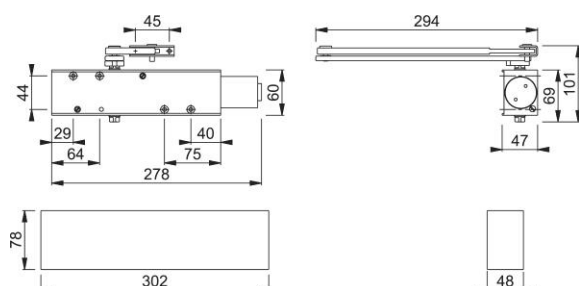

Article number	87132277
Product ref.	AR1998-L-SSS/SSS
EAN-Code	5051358064560
Country of origin	United Kingdom
CN-Code	83026000
Door type	wooden door
Maximum door width	1100 mm
Maximum door weight	80 kg
Arm Application	figure 1 and 6
Mechanism function	Electro-magnetic, hold-open/swing free option
Mechanism type	Rack & pinion Electro-mag
Fixings	Timber door
Shape	Maxi-Flowline
Power size	4
Opening Angle	max. 105° opening
Mechanism dimensions and fixing centres	280x76x49 mm; centres (38x73)(29x64)x45 mm
Arm type	Scissor arm, fixed joint, hold open,swing free
Finish of the cover	Satin Stainless Steel effect
Arm finish	Satin Stainless Steel effect
Range	ARRONE Range
Packing unit	5
Outer carton	1