

Product data sheet


Plus

AR7383



ARRONE overhead concealed door closing device:

- Power size: 2 to 4 adjustable by spring tension
- Function: Closing, latching, cushion stop
- Cover: no cover
- Maximum door width: 1,100 mm
- Maximum door weight: 80 kg
- Arm application: door mount concealed, transom mount concealed
- Successfully type tested for conformity to all the requirements of **BS EN 1154:1997**
 - Door mount pull side, transom mount pull side: 3 | 8 | 4/2 | 1* | 1 | 3
- Included in a successful fire test to **BS EN 1634** Part 1. Assessed for use on 30, 60, 90 and 120 minutes timber fire doors and 240 minutes on steel fire doors.
- CE Marked: AD5071, UKCA Marked AD7687
- Certifire approved: CF5181, CE DOP: HUK0026, UKCA DOP: HUK0026-UK
- The AR7383 can satisfy the opening force recommendations of **BS 8300** and ADM when fitted to a door with minimum width of 777 mm (standard mount) and 796 mm (transom mount) according to third party data. However other installed hardware, door seals and differential air pressure will affect the products as fitted performance meaning that the door closer alone cannot allow compliance to **BS 8300** and ADM.

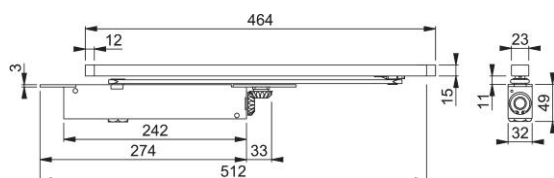

Article number	87141202
Product ref.	AR7383-SE
EAN-Code	5051358070004
Country of origin	Taiwan
CN-Code	83026000
Type	mechanism and slide track
Door type	wooden door/metal door
Maximum door width	1100 mm
Maximum door weight	80 kg
Arm Application	figure 1 and 61
Mechanism function	Spring adjustable, closing/latching speed
Mechanism type	cam action
Fixings	Timber door and metal door
Shape	
Power size	2 to 4
Opening Angle	max. 105° opening
Mechanism dimensions and fixing centres	276x32x45 mm; centres 320x20 mm; Track 424
Arm type	Concealed slide arm
Fire safety assessories	
Finish	Silver Enamel
Finish of the cover	
Arm finish	Silver Enamel
Range	ARRONE Range
Packing unit	1
Outer carton	9