

Cl/SfB		Yw7
CAW P22		
Uniclass L69:P99		

Description

AT150 is a primer for non-porous substrates to improve adhesion of illbruck hybrid sealants and adhesives.

Packaging

500 ml tin (12 per box)

Protective Equipment

USE IN WELL VENTILATED CONDITIONS and ensure all recommended protective equipment is worn during handling & use of this product. For full recommendation, refer to safety data sheet.

Preparation

- Surfaces should be clean, dry and free of dust, grease, oil, etc.
- Clean the surfaces, if necessary, with a suitable cleaning agent, thinner, etc., such as AT115 or AT200.

Application

- Pour a small amount of primer into a separate container, keeping the original container tightly closed at all times.
- Apply a thin coat of primer with a cloth or felt pad. Alternatively a brush can be used, whilst ensuring a thin coat is applied.
- The primer must be applied within two hours of decanting into a separate container.
- Drying time is about 15 minutes, depending on ambient temperature, humidity and substrate.
- If the primer is exposed to excessive humidity, it crystallizes and has reduced effectiveness.
- Only apply sealant to primer which is touch dry.

Coverage

Approximately 100 ml/m²

Storage


Store in shaded, dry conditions between +5°C and +25°C.

Shelf Life

12 months when stored as recommended in original unopened packaging.

Health & Safety Precautions

Safety data sheet must be read and understood before use.
Highly flammable- keep away from open flames and other ignition sources.

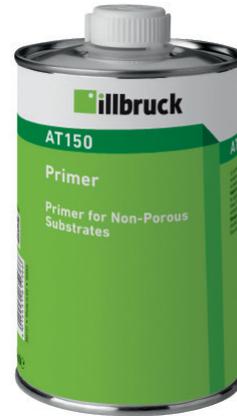

AT150

Primer for Non-Porous Substrates

Usage / Purpose

AT150 Primer is for use on hard and non-absorbent surfaces to improve the adhesion of illbruck hybrid sealants and adhesives.

Key Benefits

- Improves adhesion to non-porous substrates
- Fast drying, easy to apply

Technical Service

Tremco CPG UK Limited has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products. For more detailed information, service and advice, please call Customer Services on 01942 251400.

Guarantee / Warranty

Tremco CPG UK Limited products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG UK Limited written instructions and (b) in any application recommended by Tremco CPG UK Limited, but which is proved to be defective, will be replaced free of charge.
No liability can be accepted for the information provided in this leaflet although it is published in good faith and believed to be correct.
Tremco CPG UK Limited reserves the right to alter product specifications without prior notice, in line with Company policy of continuous development and improvement.



Tremco CPG UK Limited
Coupland Road
Hindley Green, Wigan WN2 4HT
United Kingdom
T: +44 1942 251400
F: +44 1942 251410

info.uk@tremcocpg.com
www.tremcocpg.eu