

Product data sheet


Plus

AR5500SD



ARRONE overhead door closer:

- Power size: 2 to 5 adjustable by spring tension
- Function: Closing speed, latching speed, back check
- Cover: Slide cover
- Arm application: Fig 1 and Fig 6 fixing positions
- Maximum door width: 1250 mm (Fig 1), 1100 mm (Fig 6)
- Maximum door weight: 100 kg (Fig 1), 80 kg (Fig 6)
- Testing: **BS EN 1154:1997**
Door mount pull (Fig 1): 3 | 8 | 5/2 | 1* | 1 | 3
Door mount push (Fig 6): 4 | 8 | 4/2 | 1* | 1 | 3
- Included in a successful fire test to **BS EN 1634** Part 1. Assessed for use on up to 240 minute Steel un-insulated fire doors.
- CE Marked: AD5472, UKCA Marked: AD7692

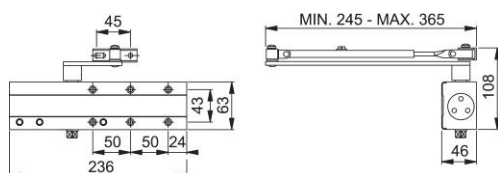

Article number	50018590
Product ref.	AR5500SD-SE
EAN-Code	5051358012011
Country of origin	China
CN-Code	83026000
Door type	Metal door
Maximum door width	1250 mm
Maximum door weight	100 kg
Arm Application	figure 1 and 6
Mechanism function	Backcheck, spring adjustment, closing/latching speed
Mechanism type	Rack & pinion
Fixings	Metal door
Shape	Trim Plate
Power size	2 to 5
Opening Angle	max. 180° opening
Mechanism dimensions and fixing centres	236x63x46 mm; centres 50x50x43 mm
Arm type	scissor arm, adjustable
Finish	Silver Enamel
Finish of the cover	Silver Enamel
Arm finish	Silver Enamel
Range	ARRONE Range
Packing unit	0
Outer carton	0