

The Multi-Mate

7Watt IP54 Multi pupose Downlight

DL3580

2700/3000K/4000K CCT Tunable

* Select before installation via DIP switch on driver

Dual color COB with LM80 report;

* Ra.90, 3 SDCM

* Min.520lm 75lm/watt

Lens or reflector version both in

* 45 degree

Phase-cut dimmable LED driver

* Flicker free

* Triac dim with leading & trailing edge dimmers

* CCT switch

* Push terminal block with loop in/out

* Max.2.5mm² cable

25 degree gyro tiltable

* All directional tilting point

Insulation material cover safety

* IC-F approved

IP54 Waterproof protection
(Max.IP65)

5 years warranty

All in 1 downlight





Lens




Reflector



Tilt



Fix

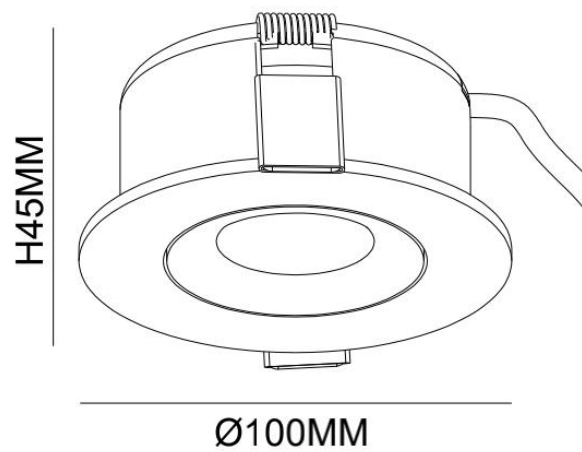

Insulation material cover safety
IC-F approved





2.5mm² cable in/out



Phase-cut dimmable LED driver

- * Flicker free
- * Triac dim with leading & trailing edge dimmers
- * CCT switch
- * Push terminal block with loop in/out
- * Max. 2.5mm² cable

Lens:



2700K



3000K



4000K

Reflector:




2700K



3000K



4000K

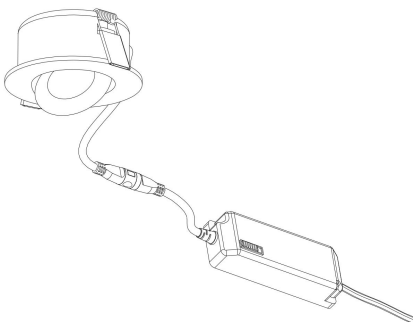

Cutout: 83-90mm

The Multi-Mate Downlight
DL3580

Description

Gyro tilt;
IP54

Finish

Black/White

Material

Aluminium
Polycarbonate



50D

TECHNICAL CHARACTERISTICS

Light source

Light source: Dual colour CSP chip
Output (W): 210mA 27V, 5.7Watt
Total power consumption (W): 7.12W
Color temperature: 2700K-3000K-4000K, 3CCT
CRI: ≥90
Photobiological risk: RG1
Real Lumen: Min.520lm
Qty Leds: 1
Lm/Real W: 75(2700K)/80(3000K)
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: <19

GEAR

This product is supplied
with gear

LIGHT DISTRIBUTION for 3000K
wide 50°

h(m)	E(lx)	Ø(m)
1	823	Ø0.96
2	205	Ø1.92
3	91.4	Ø2.88
4	51.4	Ø3.85
5	32.9	Ø4.81

The photograph may not match the reference exactly.
Please read the product description to identify the finish.