


Ultrathin Series

Constant Voltage LED Driver

Features:

- Independent ultrathin design
- Analogue flicker-free
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II

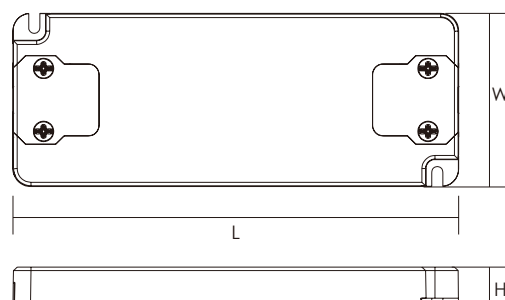

Parameters:

Model No.	Input voltage	Max. output	Output voltage	Output current	Power factor	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
	(V)	(W)	(V)	(A)	(λ)	(%)	(W)	t _a (°C)	t _c (°C)		(mm)	(g)
UT24V/12W	220-240	12	24	0-0.5	0.90C	81	<0.3	-20...+50	85	SELV	128x50x13	70
UT24V/20W	220-240	20	24	0-0.83	0.90C	82	<0.3	-20...+45	85	SELV	128x50x13	75
UT24V/30W	220-240	30	24	0-1.25	0.95	89	<0.5	-20...+40	85	SELV	155x53x16	105
UT24V/50W	100-240	50	24	0-2.1	0.95	86	<0.5	-20...+50	90	SELV	185x62x22	230