




## STRADA

The Strada decorative film, featuring a pattern of opaque horizontal bands, allows you to effectively customize your windows and glass partitions.

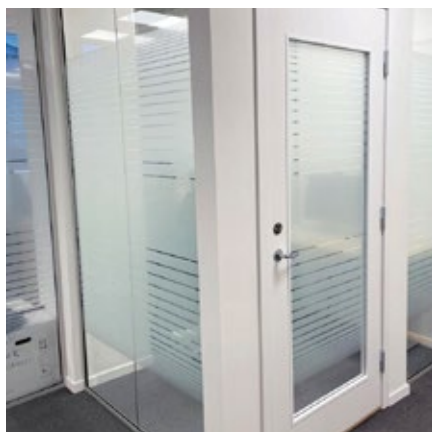

Fire-resistance rating  
**M1**



Storage from -5°C to +40°C  
**3 YEARS**



REACH RoHS compliant  
**RESPECTED**

### TECHNICAL DATA

Data calculated based on film applied to clear glass 3 mm thick (\* on double glazing 4-16-4)

Ultraviolet transmission	0%
Visible light transmission	0%
Reflection of external visible light	0%
Reflection of internal visible light	0%
Total solar energy rejected	0%
Total solar energy rejected 2 *	0%
Solar ratio:	
Solar energy reflection	0%
Solar energy absorption	0%
Solar energy transmission	0%
Reduction in Solar Glare	0%
g-value	NC
u-value	NC
Shading coefficient	NC
Installation type	Interior
Roll length	30,5 m
Film composition	PET
Thickness	40 µ
Colour from the outside	Frosted

### MAINTENANCE

Use soapy water solution for cleaning. Do not clean for at least a month after installation and do not apply any type of stickers or adhesive on the film. For more information read our maintenance instructions and quality standards on [www.solfilmsgrossisten.se](http://www.solfilmsgrossisten.se)

### INSTALLATION ADVICE

Vertical installation and on standard glass surface \*

Clear single pane	✓
Tinted single pane	✓
Reflective tinted single pane	✓
Clear double pane	✓
Tinted double pane	✓
Reflective tinted double pane	✓
Gas-filled double pane - Low E	✓
STADIP EXT. clear double pane	✓
STADIP INT. clear double pane	✓

✓ Yes ! Caution ✗ Not

Recommended

\* Recommendations provided on the basis of a glazed surface covering up to 2.5 m².

### CONSTRUCTION

1. High optical quality polyester with printed design
2. PS adhesive, glass polymerization within 15 days
3. Protection release liner, disposable after installation

